


NATIONAL MODELS
HRO-7R, HRO-7T

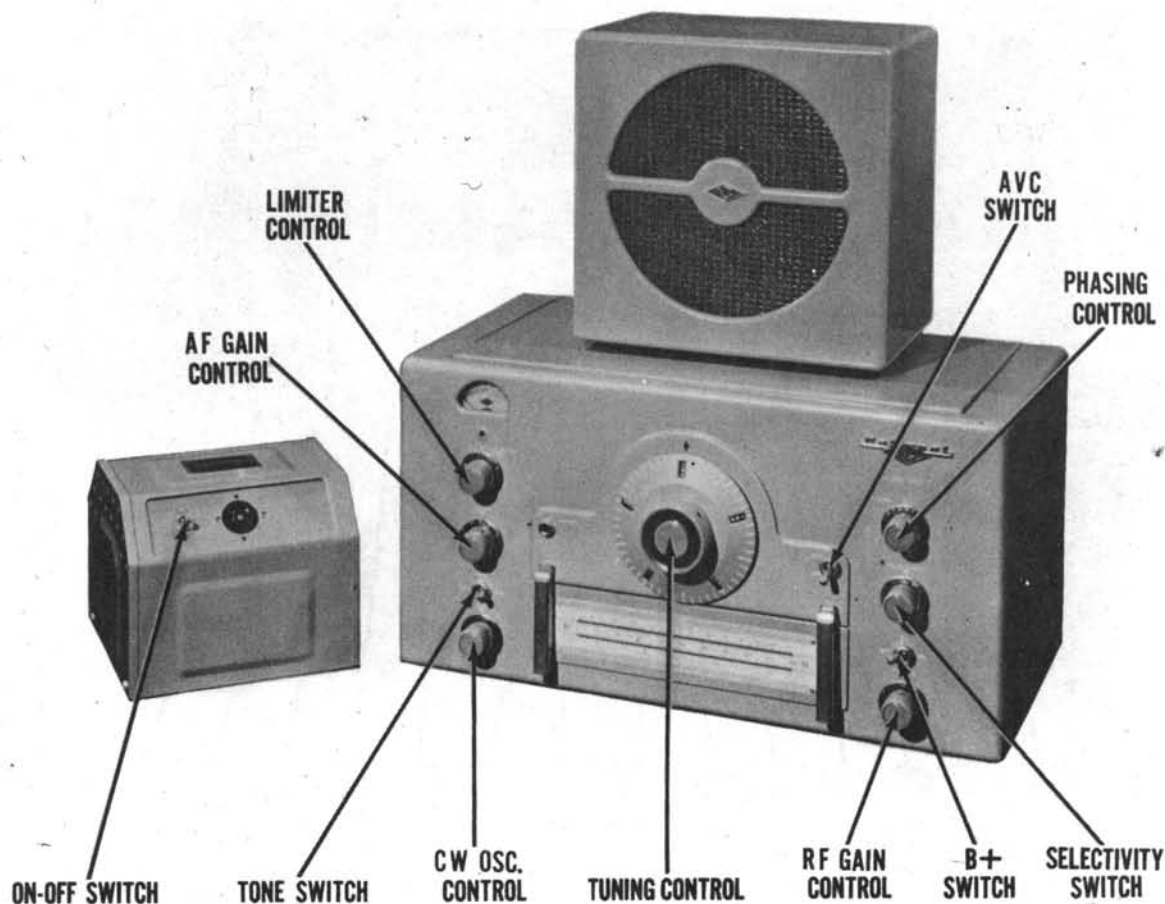

NATIONAL MODELS
HRO-7R, HRO-7T

NATIONAL MODEL HRO-7T

TRADE NAME	National, Models HRO-7R, HRO-7T
MANUFACTURER	National Co., Inc., 61 Sherman St., Malden, Mass.
TYPE SET	AC or Battery Operated Commercial Type Multi-Band Superheterodyne Receiver
TUBES (THIRTEEN)	Types, 6K7 1st RF Amp., 6K7 2nd RF Amp., 6J7 Mixer, 6C4 Oscillator, 6J7 or 6K7 1st IF Amp., 6K7 2nd IF Amp., 6H6 Det.-AVC, 6J7 BFO, 6H6 Noise Limiter, 6SJ7 AF Amp., 6V6GT Power Output, OA2 Voltage Regulator, 5Y3GT Rectifier.
POWER SUPPLY	110-120 Volts AC, 220-240 Volts AC (697 Power Unit) or 6 Volt Storage Battery (686S Power Unit).
TUNING RANGE	- Band "A"-14.0-30.0MC, Band "B"-7.0-14.4MC, Band "C"-3.5-7.3MC, Band "D"-1.7-4.0MC (Following Bands available if desired) Band "E"-900-2050KC, Band "F"-480-960KC, Band "G"-180-430KC, Band "H"-100-200KC, Band "J"-50-100KC.



HOWARD W. SAMS & CO., INC. • 2924 East Washington Street • Indianapolis 7, Indiana


"The listing of any available replacement part herein does not constitute in any case a recommendation, warranty or guaranty by Howard W. Sams & Co., Inc., as to the quality and suitability of such replacement part. The numbers of these parts have been compiled from information furnished to Howard W. Sams & Co., Inc., by the manufacturers of the particular type of replacement part listed."
"Reproduction or use, without express permission, of editorial or pictorial con-

tent, in any manner, is prohibited. No patent liability is assumed with respect to the use of the information contained herein. Copyright 1948 by Howard W. Sams & Co., Inc., Indianapolis, Indiana, U. S. A. Copyright under International Copyright Union. All rights reserved under Inter-American Copyright Union (1910) by Howard W. Sams & Co., Inc." Printed in U. S. of America

DATE 11/48-#4820-12

SET #50-FOLDER #12

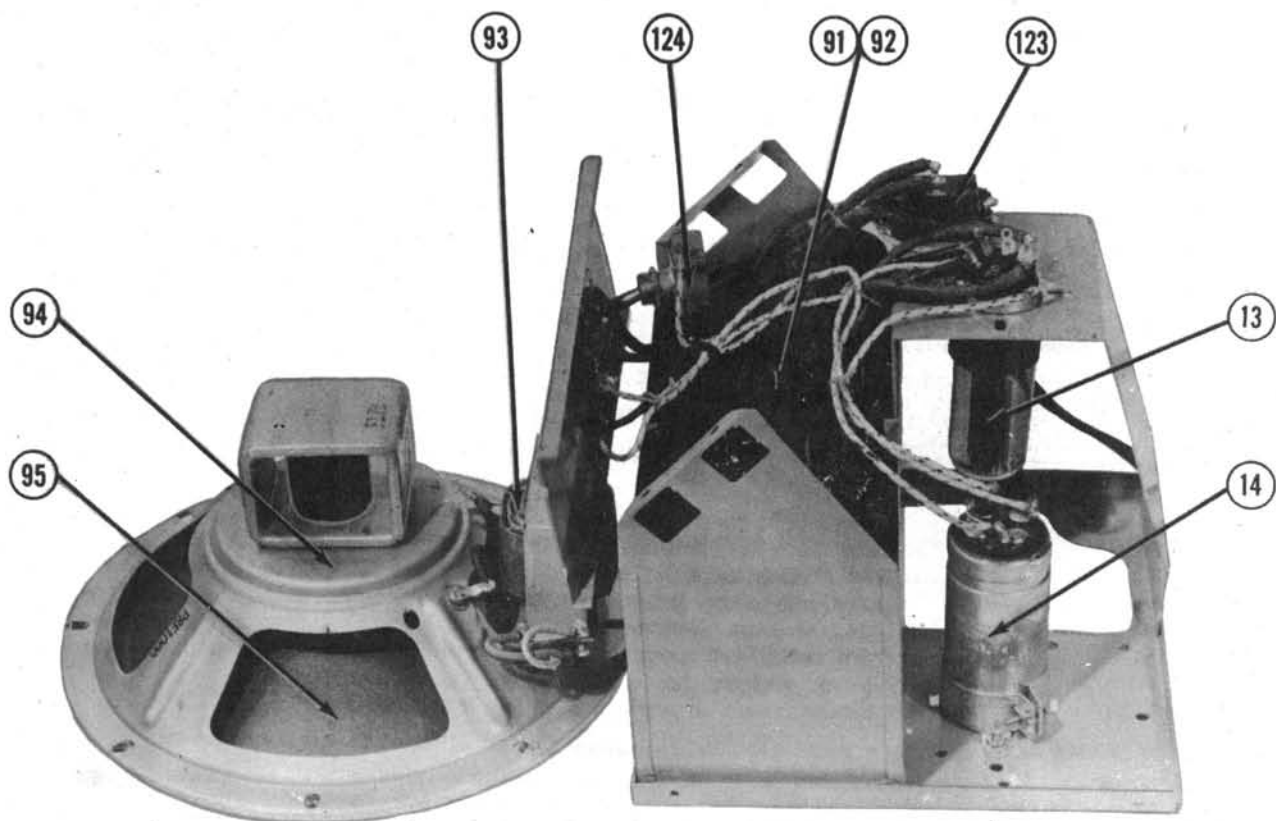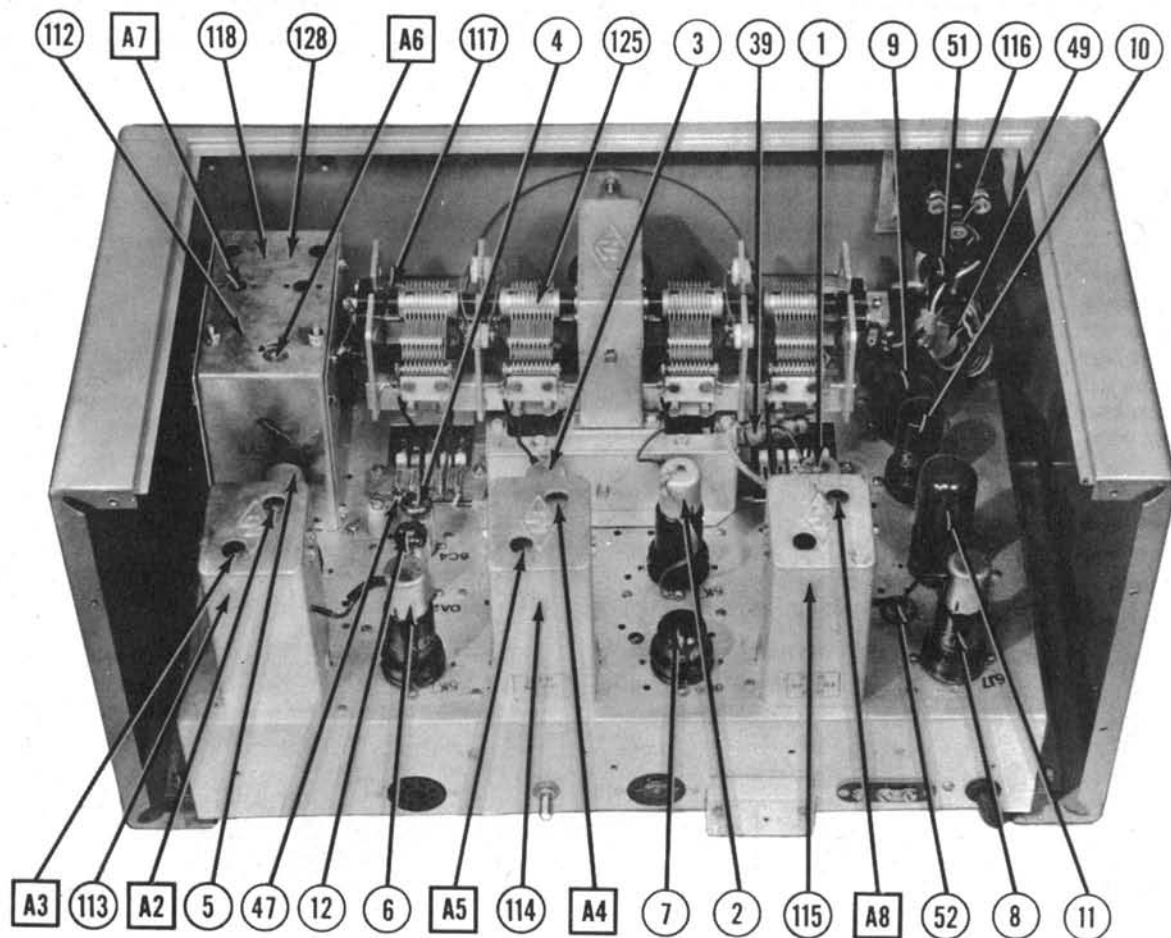

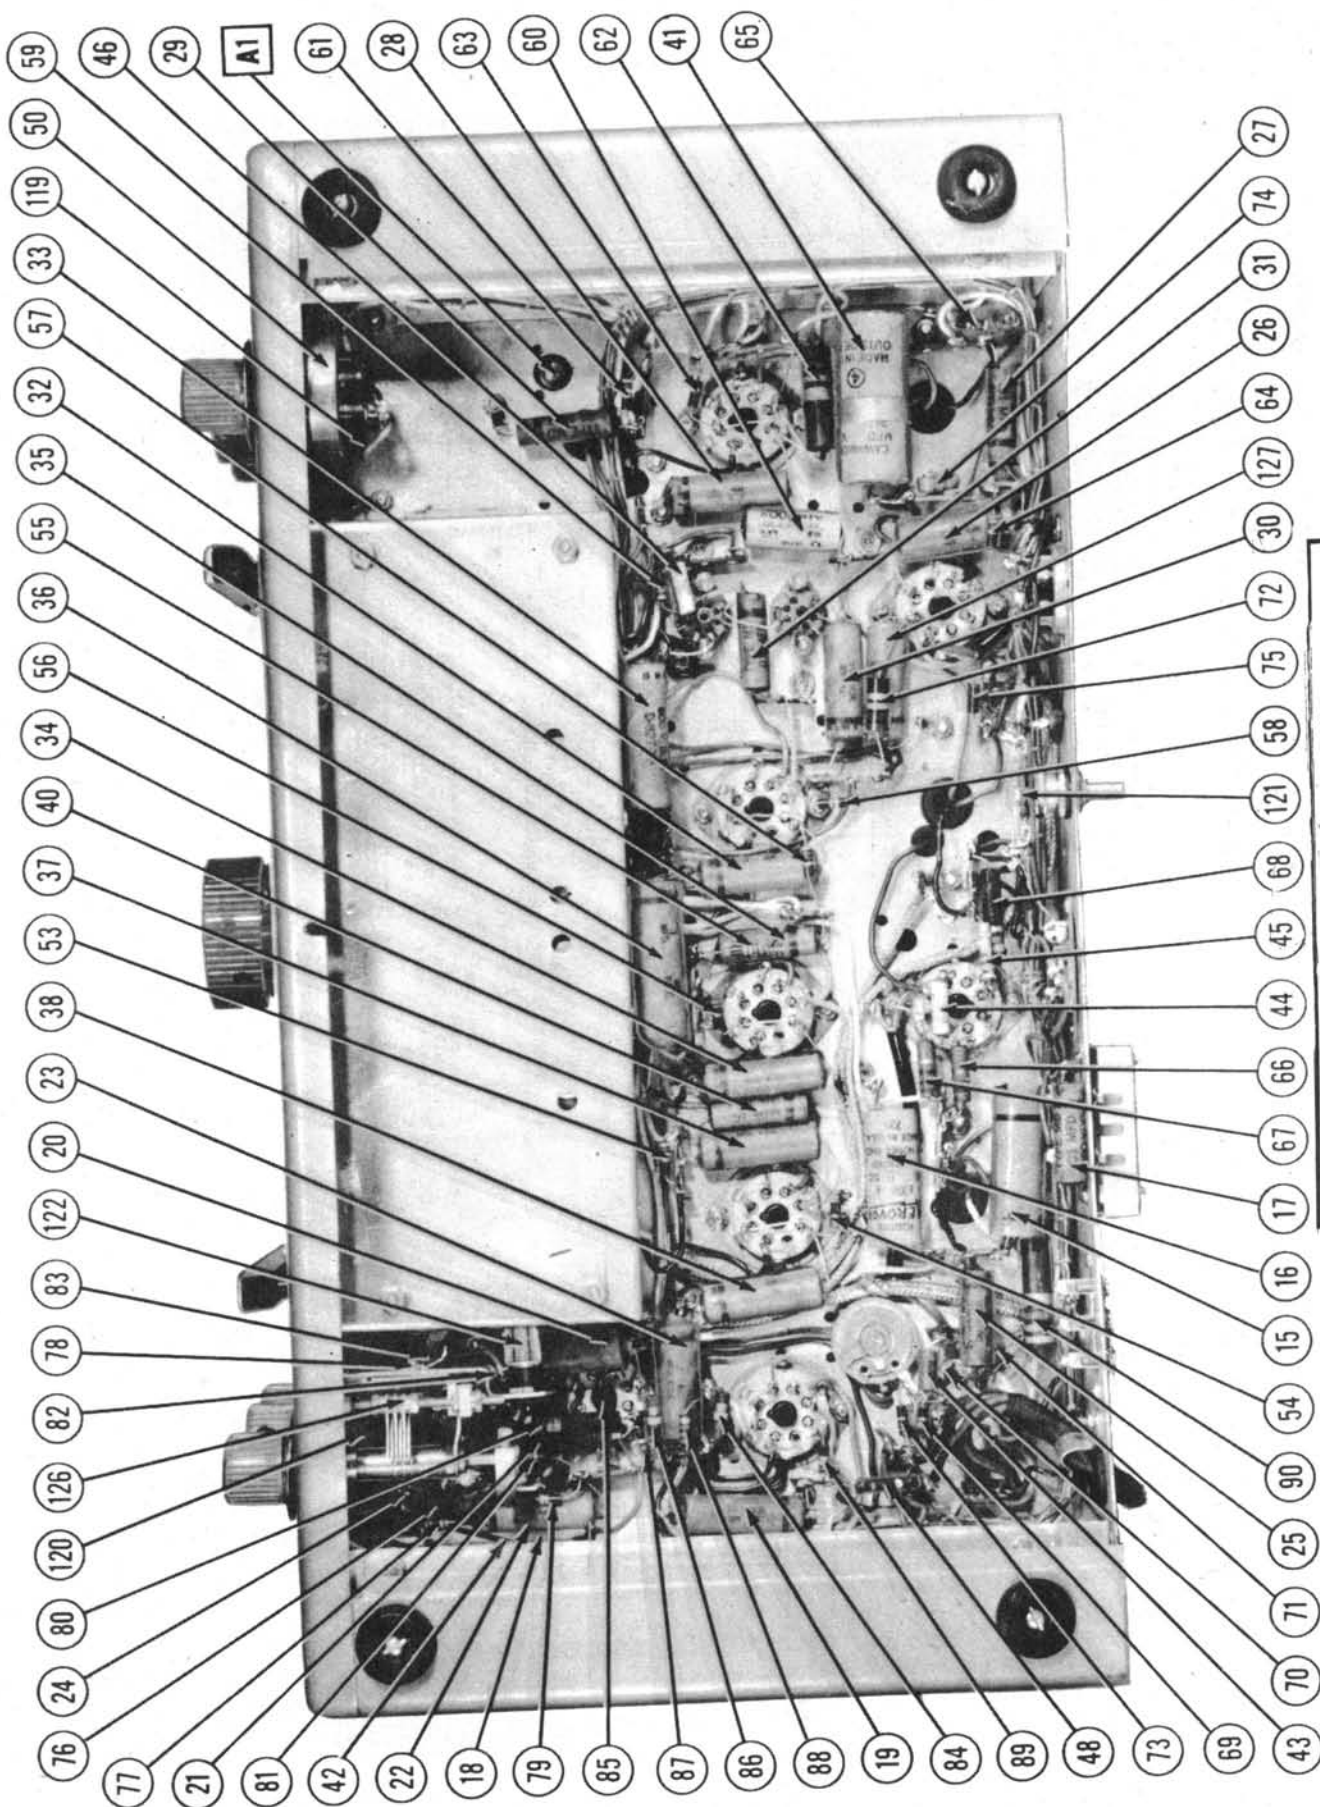

PARTS LIST AND DESCRIPTIONS

PARTS LIST AND DESCRIPTIONS (Continued)

TUBES (SYLVANIA or Equivalent)

ITEM No.	USE	REPLACEMENT DATA		INSTALLATION NOTES
		NATIONAL PART No.	STANDARD REPLACEMENT	
1	1st RF Amp.	6K7	6K7	6K7 alternate
2	2nd RF Amp.	6K7	6K7	
3	Mixer	6J7	6J7	
4	Oscillator	6C4	6C4	
5	1st IF Amp.	6J7	6J7	
6	2nd IF Amp.	6K7	6K7	
7	Det.-AVC	6H6	6H6	
8	Beat Freq. Osc.	6H6	6H6	
9	Noise Limiter	6H6	6H6	
10	AF Amp.	6XJ7	6XJ7	
11	Power Output	6V6GT	6V6GT	
12	Voltage Reg.	0A2	0A2	
13	Rectifier	5Y3GT	5Y3GT	

CAPACITORS

Capacity values given in the rating column are in mfd. for Electrolytic and Paper Capacitors, and in mmfd. for Mica and Ceramic Capacitors.

ITEM No.	RATING CAP. VOLTS	REPLACEMENT DATA				IDENTIFICATION CODES AND INSTALLATION NOTES
		NATIONAL PART No.	AEROVOX PART No.	CORNEILL DUBIER PART No.	SOLAR PART No.	
14A	475	E450-8-16	UF1111-450	DI-3X8-450#	D9059	Filter
B	475					
C	475					
15	10					
16	25					
17	.01	FRS50/10	BR105	M-10-50	TA-510	Output Cathode Bypass
18	.1	FRS50/25	BR255	M-25-50	TA-525	AF Cathode Bypass
19	.1	484-1	DT4P1	ST-6-01	TC-11	RF Bypass Pwr. Supply
20	.1	484-1	DT4P1	ST-4-1	TC-1	Audio Coupling
21	.1	484-1	DT4P1	ST-4-1	TC-1	AF Plate Decoupling
22	.1	484-1	DT4P1	ST-6-01	TC-11	AF Screen Bypass
23	.1	484-1	DT4P1	ST-4-1	TC-1	Audio Coupling
24	.1	484-1	DT4P1	ST-4-1	TC-1	Limiter Filter
25	.1	484-1	DT4P1	ST-6-01	TC-11	Audio Coupling
26	.1	484-1	DT4P1	ST-4-1	TC-1	2nd IF Cath. Bypass
27	.1	484-1	DT4P1	ST-6-01	TC-11	AVC Filter
28	.1	484-1	DT4P1	ST-4-1	TC-1	1st IF Cathode Bypass
29	.1	484-1	DT4P1	ST-6-01	TC-11	AVC Filter
30	.1	484-1	DT4P1	ST-4-1	TC-1	Osc. Plate Bypass
31	.1	484-1	DT4P1	ST-6-01	TC-11	Osc. Coupling
32	.1	484-1	DT4P1	ST-4-1	TC-1	Mixer Cathode Bypass
33	.1	484-1	DT4P1	ST-6-1	TC-1	RF Byp. Pwr. Supply
34	.1	484-1	DT4P1	ST-4-1	TC-1	2nd RF Cath. Byp.
35	.1	484-1	DT4P1	ST-6-01	TC-11	AVC Filter
36	.1	484-1	DT4P1	ST-4-1	TC-1	Screen Bypass
37	.1	484-1	DT4P1	ST-6-1	TC-1	1st RF Cath. Byp.
38	.1	484-1	DT4P1	ST-4-1	TC-1	AVC Filter
39	.1	484-1	DT4P1	ST-6-01	TC-11	IF Plate Decoup.
40	.1	484-1	DT4P1	ST-4-1	TC-1	Tone Compensation
41	.25	684-1	DT4P1	ST-6-25	TC-2	BFO Coupling-Cer.
42	3500	1467-003	14503	M-5-23	1FM-23	IF Coupling-Cer.
43	500					
44	100	1468-0001	5M5T1	M-5-31	1FM-31	Diode Filter-Cer.
45	270	1469-00025	5M5T25	M-5-325	1FM-325	Osc. Grid Cap.-Cer.
46	100	1468-0001	5M5T1	M-5-31	1FM-31	Osc. Comp.-Cer.-Note 1
47	10					Output Grid Byp.-Cer.
48	500					Screen Bypass-Note 2
49	160	1468-00015	5M5T15	M-5-315	1FM-315	
127	400	484-1	DT4P1	ST-4-1	TC-1	

#Parallel sections to obtain desired capacity.

10mit one section.

Note1-Special tolerance-(minus .00077 mmf./mmf./oc)

Note2-Not used in all models.

TRANSFORMER (OUTPUT)

ITEM No.	RATING			REPLACEMENT DATA			INSTALLATION NOTES
	IMPEDANCE	DC RES.	SEC.	NATIONAL PART No.	STANCOR PART No.	THORADYN PART No.	
93	2500Ω	3.2Ω	217Ω	1.6Ω	A-3825	T22860	A-2902

SPEAKER

ITEM No.	RATINGS	REPLACEMENT DATA			INSTALLATION NOTES
		NATIONAL PART No.	JENSEN PART No.	QUAM PART No.	
94	FIELD VC IMP. 3.2Ω		ST-117		8A231
95	CONE DIA. VC DIA. 7-3/4"		Mod. PB-T		

R F COILS

ITEM No.	USE	DC RES.		REPLACEMENT DATA		INSTALLATION NOTES
		PRI.	SEC.	NATIONAL PART No.	MEISSNER PART No.	
96	Ant. Coil D	.6Ω	.02			
97	"	.34	.13			
98	"	.23	.13			
99	"	.23	.13			
100	1st RF	14Ω	.8Ω			
101	"	6.4Ω	.2Ω			
102	"	3.2Ω	.1Ω			
103	"	.9Ω	.02			
104	2nd RF	13.5Ω	.9Ω			
105	"	6.3Ω	.2Ω			
106	"	.4Ω	.02			
107	Osc. Coil D	.8Ω	.03			
108	"	.2Ω	.13			
109	"	.1Ω	.02			
110	"	.8Ω	.02			
111	"	8Ω	9.5Ω			
112	1st IF	8Ω	8Ω			
113	2nd IF	8Ω	8Ω			
114	3rd IF	8.2Ω	8Ω			
115	RF Osc.					

DIAL LIGHT

ITEM No.	BASE TYPE	VOLTS	AMPS.	BEAD COLOR	REPLACEMENT DATA		INSTALLATION NOTES
					NATIONAL PART No.		
116	Screw	6-8	0.15	Brown		Type 47	

MISCELLANEOUS

ITEM No.	PART NAME	NATIONAL PART No.	NOTES
117	Switch		AVC
118	"		Crystal Selectivity
119	"		B+
120	"		Tone
121	"		Radio-Phono
122	"		CW Osc.
123	"		115-230 Volt
124	"		Power
125	4 Gang Var. Cap.		(13-231MFD) each section
126	BFO Tuning Cap.		
128	Crystal Resonat		

PARTS LIST AND DESCRIPTIONS (Continued) **CONTROLS**

ITEM No.	REPLACEMENT DATA			INSTALLATION NOTES
	BATING	NATIONAL PART No.	CLAROSTAT PART No.	
49A	RESIST. WATTS	D18-133	R-80-2	AF Gain Control
50	1.5	W-10K*	Not Req.	Attach to 49A per instructions
51	1.5	W-10K*	43-10K*	RF Gain Control & "S" Meter SW.
52	1.5	W-1000	43-1000	"S" Meter Control & SW.

*Use center & right hand terminals only.

RESISTORS


ITEM No.	REPLACEMENT DATA		IDENTIFICATION CODES
	NATIONAL PART No.	IRC PART No.	
53	470KΩ	BTS-470K	V1-V1-V1. AVC Network
54	330KΩ	BTS-470K	Or.-Or.-Br. 1st RF Cathode
55	470KΩ	BTS-470K	V1-V1-V1. AVC Network
56	330KΩ	BTS-470K	Or.-Or.-Br. 2nd RF Cathode
57	470KΩ	BTS-470K	V1-V1-V1. AVC Network
58	100KΩ	BTS-100K	Or.-Or.-Br. 2nd RF Cathode
59	22KΩ	BTS-22K	V1-V1-V1. AVC Network
60	250KΩ	AB-250K	Br.-Blk.-Yl. Mixer Screen
61	470KΩ	BTS-470K	Red-Red-Or. Osc. Grid
62	27KΩ	BTS-27K	V1-V1-V1. AVC Network
63	120KΩ	BTS-120K	Red-V1-Or. Screen Bleeder
64	330KΩ	BM-4-330	Br.-Red-Red 1st IF Cathode
65	470KΩ	BTS-470K	Or.-Or.-Br. 2nd IF Cathode
66	1.5 Meg.	BTS-1.5 Meg.	V1-V1-V1. AVC Network
67	1.5 Meg.	BTS-1.5 Meg.	Br.-Orn.-Orn. " "
68	4.3KΩ	BM-1-4.3	Br.-Orn.-Orn. " "
69	220KΩ	BTS-220K	Yl.-Or.-Gold Fil. Dropping
70	100KΩ	BTS-100K	Red-Red-Yl. BFO Voltage Dropping
71	100KΩ	BTS-100K	Br.-Blk.-Yl. BFO Screen Dropping
72	15KΩ	BTS-15K	Br.-Blk.-Yl. BFO Voltage Bleeder
73	180KΩ	BTS-180K	Br.-Orn.-Or. Screen Dropping
74	270KΩ	BM-4-270	Br.-Gray-Red "S" Meter Network
75	220KΩ	BTS-220K	Red-V1-Br. "S" Meter Shunt
76	22KΩ	BTS-22K	Red-Red-Red 2nd IF Plate Decoupling
77	470KΩ	BTS-470K	Red-Red-Or. Diode Load
78	220KΩ	BTS-220K	Yl.-V1-Yl. Diode Load
79	220KΩ	BTS-220K	Red-Red-Yl. Limiter Plate
80	4.3KΩ	BM-1-4.3	Red-Red-Yl. Limiter Threshold Filter
81	220KΩ	BTS-220K	Yl.-Or.-Gold Limiter Filament Dropping
82	470KΩ	BTS-470K	Red-Red-Yl. Limiter Cathode
83	470KΩ	BTS-470K	Red-Red-Yl. AF Voltage Divider
84	820KΩ	BTS-820K	V1-V1-V1. Lim. Plate Load
85	220KΩ	BTS-220K	Gray-Red-Yl. Lim. Plate Decoupling.
86	820KΩ	BTS-820K	Red-Red-Red AF Cathode
87	100KΩ	BTS-100K	Br.-Blk.-Yl. AF Screen
88	47KΩ	BTS-47K	Yl.-V1-Or. AF Plate Load
89	470KΩ	BTS-470K	Yl.-V1-Or. AF Decoupling
90	330KΩ	BM-2-330	Or.-Or.-Br. Output Cathode

TRANSFORMER (POWER)

ITEM No.	REPLACEMENT DATA			MERIT PART No.
	NATIONAL PART No.	STANCOR PART No.	THORDARSON PART No.	
91	220V AC 580V CT 5.1V AC 6.2V AC capped @ 117V AC @ 45A			

FILTER CHOKE

ITEM NO.	REPLACEMENT DATA			INSTALLATION NOTES
	NATIONAL PART No.	STANCOR PART No.	THORDARSON PART No.	
92	TOTAL DIRECT CURRENT .095A.	D. C. RESISTANCE 25/Ω	INDUCTANCE 10 CURRENT 1000A	17 Henries

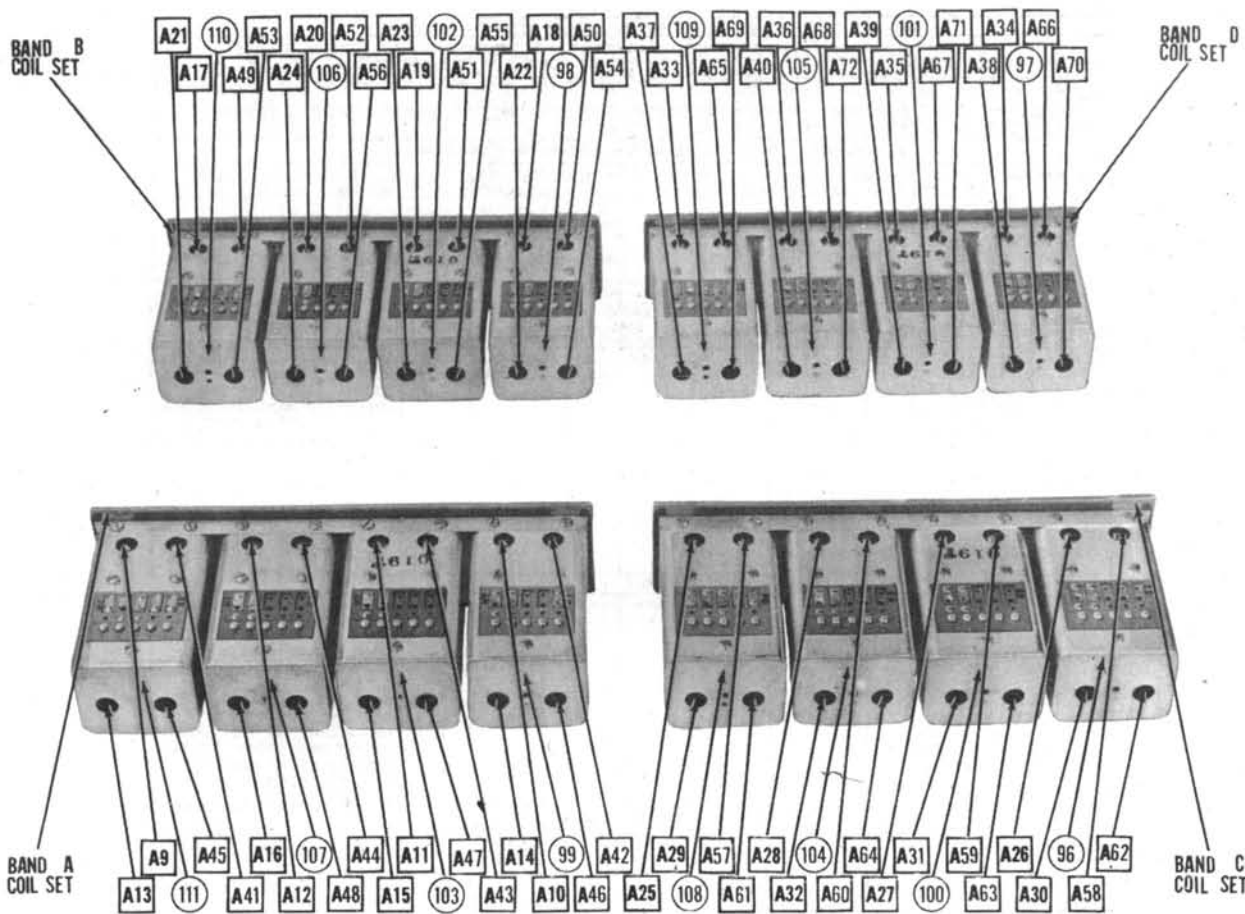

ALIGNMENT INSTRUCTIONS—READ CAREFULLY BEFORE ATTEMPTING ALIGNMENT

Controls should be set as follows except where noted otherwise: Limiter control to "Off" AF Gain at "10", tone switch at "High", CWO control at "OFF", RF Gain control at "9", B+ switch at "ON", Selectivity switch at "Off", Phasing control at "Zero" and AVC switch at "OFF".

Output of signal generator should be no higher than necessary to obtain an output reading. Use an insulated alignment tool for all adjustments.

IF ALIGNMENT CHECK TO BE MADE PRIOR TO ALIGNMENT.

- Set Selectivity Switch to 5, AVC to "Off", RF Gain at "9", Phasing Control at zero and CWO Control to "On". Vary CWO Control to point of lowest background noise and note setting, which should occur near 9.
- Set Selectivity Switch to "Off" and vary CWO control to point of lowest background noise and note setting which should occur near 9.
- If IF Alignment is correct the two settings from (a) to (b) should coincide and Steps 1, 2 and 3 may be omitted.

IF ALIGNMENT

DUMMY ANTENNA	SIGNAL GENERATOR COUPLING	SIGNAL GENERATOR FREQUENCY	COIL SET	RADIO DIAL SETTING	OUTPUT METER	ADJUST	REMARKS
1 Direct	High side to grid cap. of 6J7 Mixer Tube (3). Low side to chassis.	Approx. 456KC (Unmodulated)	Band "E"	Tuning cap. fully open.	Across voice coil	A1, A2, A3, A4, A5	Set selectivity switch at "5". Turn CWO "ON". Adjust sig. gen. frequency for maximum output. Adjust "CWO" control to give approximately 400 μ note. Adjust A1 thru A5 for maximum output.
2 Direct	"	Tune 3 or 4KC to either side of freq. determined in Step 1.	"	"	"	A6	Set selectivity switch to 1. Adjust A6 for maximum output. Return selectivity switch to "OFF".
3 Direct	"	Exact freq. determined in Step 1	"	"	"	A7, A8	Adjust A7 for maximum output. Check CWO tuning per part (B) of IF Alignment check in prealignment instructions. If setting of CWO control does not occur near "9" set CWO control at "9" and adjust A8 for lowest background noise. If setting is at or near "9" then A8 is adjusted correctly.

GENERAL COVERAGE ALIGNMENT

DUMMY ANTENNA	SIGNAL GENERATOR COUPLING	SIGNAL GENERATOR FREQUENCY	COIL SET	RADIO DIAL SETTING	OUTPUT METER	ADJUST	REMARKS
4 400 Ω carbon res.	High side to ant. terminal "A". Low side to center ant. terminal with link connected.	30.0MC	Band "A"	485	Across voice coil	A9	Adjust for maximum output. Tune sig. gen. to 30.9MC. If signal is not heard, retune sig. gen. to 30.0 MC and open A9 to next peak. Adjust for maximum output and recheck for image.
5 "	"	"	"	Tune for maximum output.	"	A10, A11, A12	Rock tuning cap. and adjust for maximum output.
6 "	"	14.4MC	"	54	"	A13, A14, A15, A16	Adjust for maximum output. Repeat Steps 4, 5 & 6 until no further improvement can be made, making Step 5 last step.
7 "	"	"	Band "B"	485	"	A17	Adjust for maximum output. Tune sig. gen. to 15.3MC. If signal is not heard, retune sig. gen. to 14.4 MC and open A17 to next peak. Adjust for maximum output and recheck for image.
8 "	"	"	"	Tune for maximum output.	"	A18, A19, A20	Rock tuning cap. and adjust for maximum output.
9 "	"	7.0MC	"	28	"	A21, A22, A23, A24	Adjust for maximum output. Repeat Steps 7, 8 & 9 until no further improvement can be made, making Step 8 last step.
10 "	"	7.3MC	Band "C"	490	"	A25	Adjust for maximum output. Tune sig. gen. to 8.2MC. If signal is not heard, retune sig. gen. to 7.3 MC and open A25 to next peak. Adjust for maximum output and recheck for image.
11 "	"	"	"	Tune for maximum output.	"	A26, A27, A28	Rock tuning cap. and adjust for maximum output.
12 "	"	3.5MC	"	23	"	A29, A30, A31, A32	Adjust for maximum output. Repeat Steps 10, 11 & 12 until no further improvement can be made, making Step 11 last step.
13 "	"	4.0MC	Band "D"	490	"	A33	Adjust for maximum output. Tune sig. gen. to 4.9MC. If signal is not heard, retune sig. gen. to 4.0MC and open A33 to next peak. Adjust for maximum output and recheck for image.
14 "	"	"	"	Tune for maximum output.	"	A34, A35, A36	Rock tuning cap. and adjust for maximum output.
15 "	"	1.8MC	"	36	"	A37, A38, A39, A40	Adjust for maximum output. Repeat Steps 13, 14 & 15 until no further improvement can be made, making Step 14 last step.

BANDSPREAD ALIGNMENT

General coverage alignment should be completed before bandspread alignment.
Tracking of RF stages at low frequency end of each band may be checked as follows: After adjustments of padders is completed attempt to peak each stage with its associated high freq. trimmer. Any change in capacitance should cause a decrease in output if that stage is tracking correctly. This checking procedure will misalign the high frequency trimmers, therefore they should be repeaked at the high frequency end of the band per alignment instructions.

DUMMY ANTENNA	SIGNAL GENERATOR COUPLING	SIGNAL GENERATOR FREQUENCY	COIL SET	RADIO DIAL SETTING	OUTPUT METER	ADJUST	REMARKS
16	400Ω carbon res.	30.0MC	Band "A"	450	Across voice coil	A41	Adjust for maximum output. Tune sig. gen. to 30.9MC. If signal is not heard retune sig. gen. to 30.0 MC and open A41 to next peak. Adjust for maximum output and recheck for image.
17	"	"	"	Tune for maximum output.	"	A42, A43, A44	Rock tuning cap. and adjust for maximum output.
18	"	27.2MC	"	61	"	A45, A46, A47, A48	Adjust for maximum output. Repeat Steps 16, 17 & 18 until no further improvement can be made, making Step 17 last step.
19	"	14.4MC	Band "B"	450	"	A49	Adjust for maximum output. Tune sig. gen. to 15.3MC. If signal is not heard, retune sig. gen. to 14.4 MC and open A49 to next peak. Adjust for maximum output and recheck for image.
20	"	"	"	Tune for maximum output.	"	A50, A51, A52	Rock tuning cap. and adjust for maximum output.
21	"	14.0MC	"	50	"	A53, A54, A55, A56	Adjust for maximum output. Repeat Steps 19, 20 & 21 until no further improvement can be made, making Step 20 last step.
22	"	7.3MC	Band "C"	450	"	A57	Adjust for maximum output. Tune sig. gen. to 8.2MC. If signal is not heard, retune sig. gen. to 7.3MC and open A57 to next peak. Adjust for maximum output and recheck for image.
23	"	"	"	Tune for maximum output.	"	A58, A59, A60	Rock tuning cap. and adjust for maximum output.
24	"	7.0MC	"	50	"	A61, A62, A63, A64	Adjust for maximum output. Repeat Steps 22, 23 and 24 until no further improvement can be made, making Step 23 last step.
25	"	4.0MC	Band "D"	450	"	A65	Adjust for maximum output. Tune sig. gen. to 4.9MC. If signal is not heard, retune sig. gen. to 4.0 MC and open A65 to next peak. Adjust for maximum output and recheck for image.
26	"	"	"	Tune for maximum output.	"	A66, A67, A68	Rock tuning cap. and adjust for maximum output.
27	"	3.5MC	"	50	"	A69, A70, A71, A72	Adjust for maximum output. Repeat Steps 25, 26 & 27 until no further improvement can be made, making Step 26 last step.

1ST RF STAGE ALIGNMENT WITH LOW IMPEDANCE TRANSMISSION LINE.


If a low impedance transmission line is to be used with the receiver it may be necessary to realign the first RF amplifier at the high frequency end of each band.

GENERAL COVERAGE


DUMMY ANTENNA	SIGNAL GENERATOR COUPLING	SIGNAL GENERATOR FREQUENCY	COIL SET	RADIO DIAL SETTING	OUTPUT METER	ADJUST	REMARKS
28	Antenna feeders must be connected. (Use radiated signal from sig. gen. with no direct connection)	30.0MC	Band "A"	Tune for maximum output.	Across voice coil	A10	Adjust for maximum output.
29	"	14.4MC	Band "B"	"	"	A18	" " " " " "
30	"	7.3MC	Band "C"	"	"	A26	" " " " " "
31	"	4.0MC	Band "D"	"	"	A34	" " " " " "




BANDSPREAD ALIGNMENT

DUMMY ANTENNA	SIGNAL GENERATOR COUPLING	SIGNAL GENERATOR FREQUENCY	COIL SET	RADIO DIAL SETTING	OUTPUT METER	ADJUST	REMARKS
32	Antenna feeders must be connected. (Use radiated signal from sig. gen. with no direct connection)	30.0MC	Band "A"	Tune for maximum output.	Across voice coil	A42	Adjust for maximum output.
33	"	14.4MC	Band "B"	"	"	A50	" " " " " "
34	"	7.3MC	Band "C"	"	"	A58	" " " " " "
35	"	4.0MC	Band "D"	"	"	A66	" " " " " "



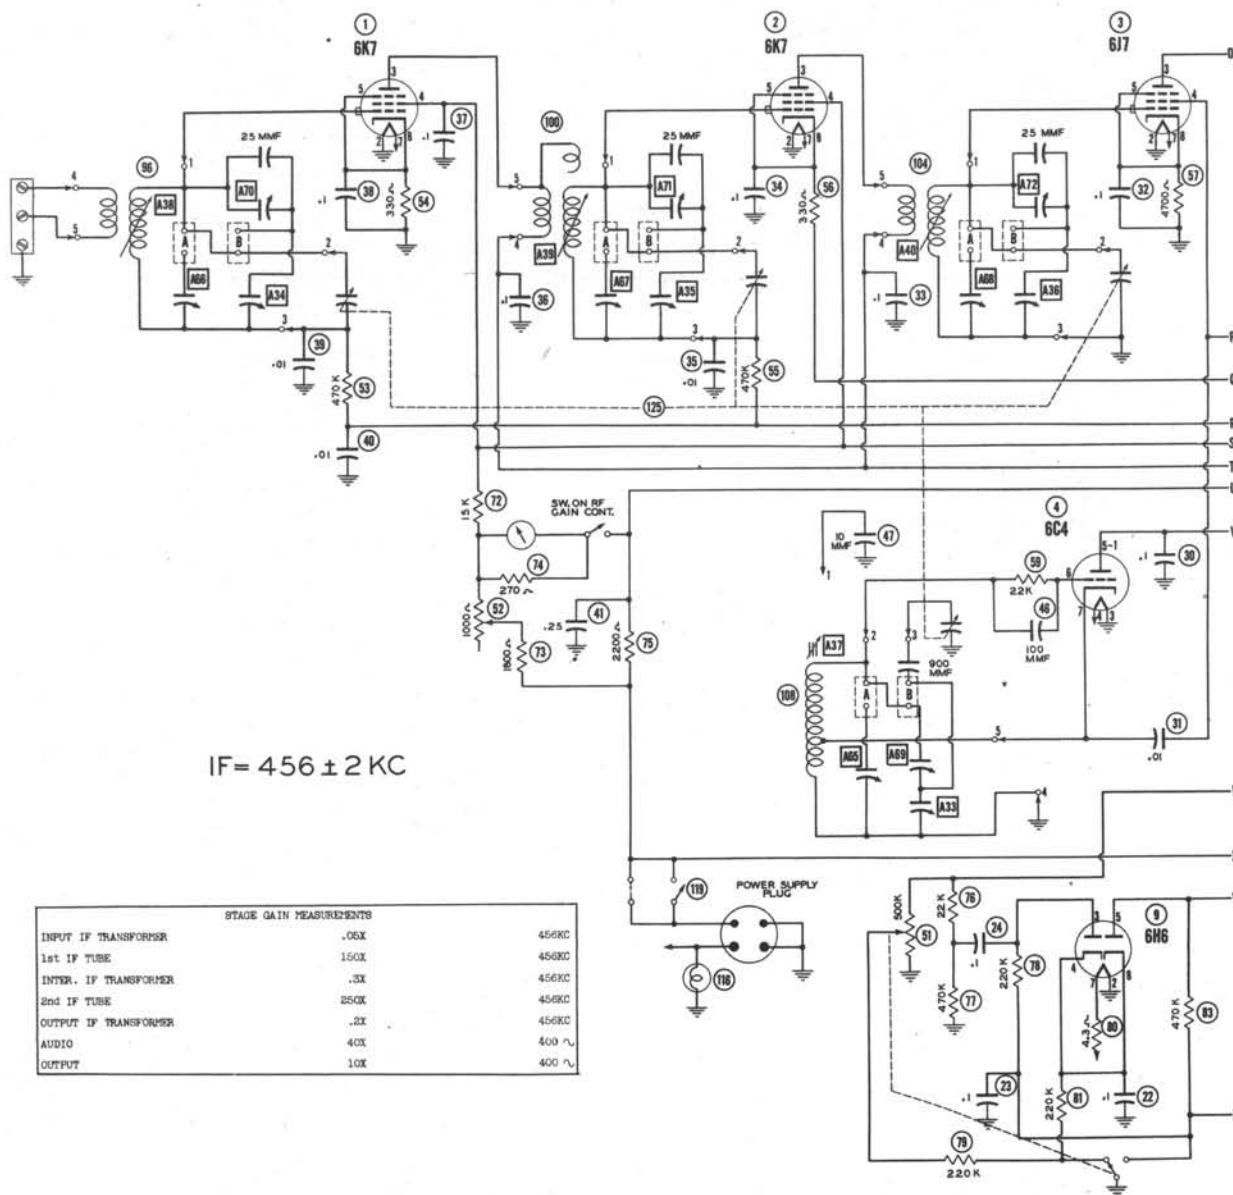


The stage gain measured values listed above are approximate values for an average operative stage, rather than an absolute value. It should be borne in mind that it is possible to introduce so many variables into the measurement operation, such as, type of equipment used for measuring, handling and placement of probes, the accuracy of alignment, etc., that an absolute reading is impractical. AVC is made inoperative and 3-volt battery bias substituted for measurement.



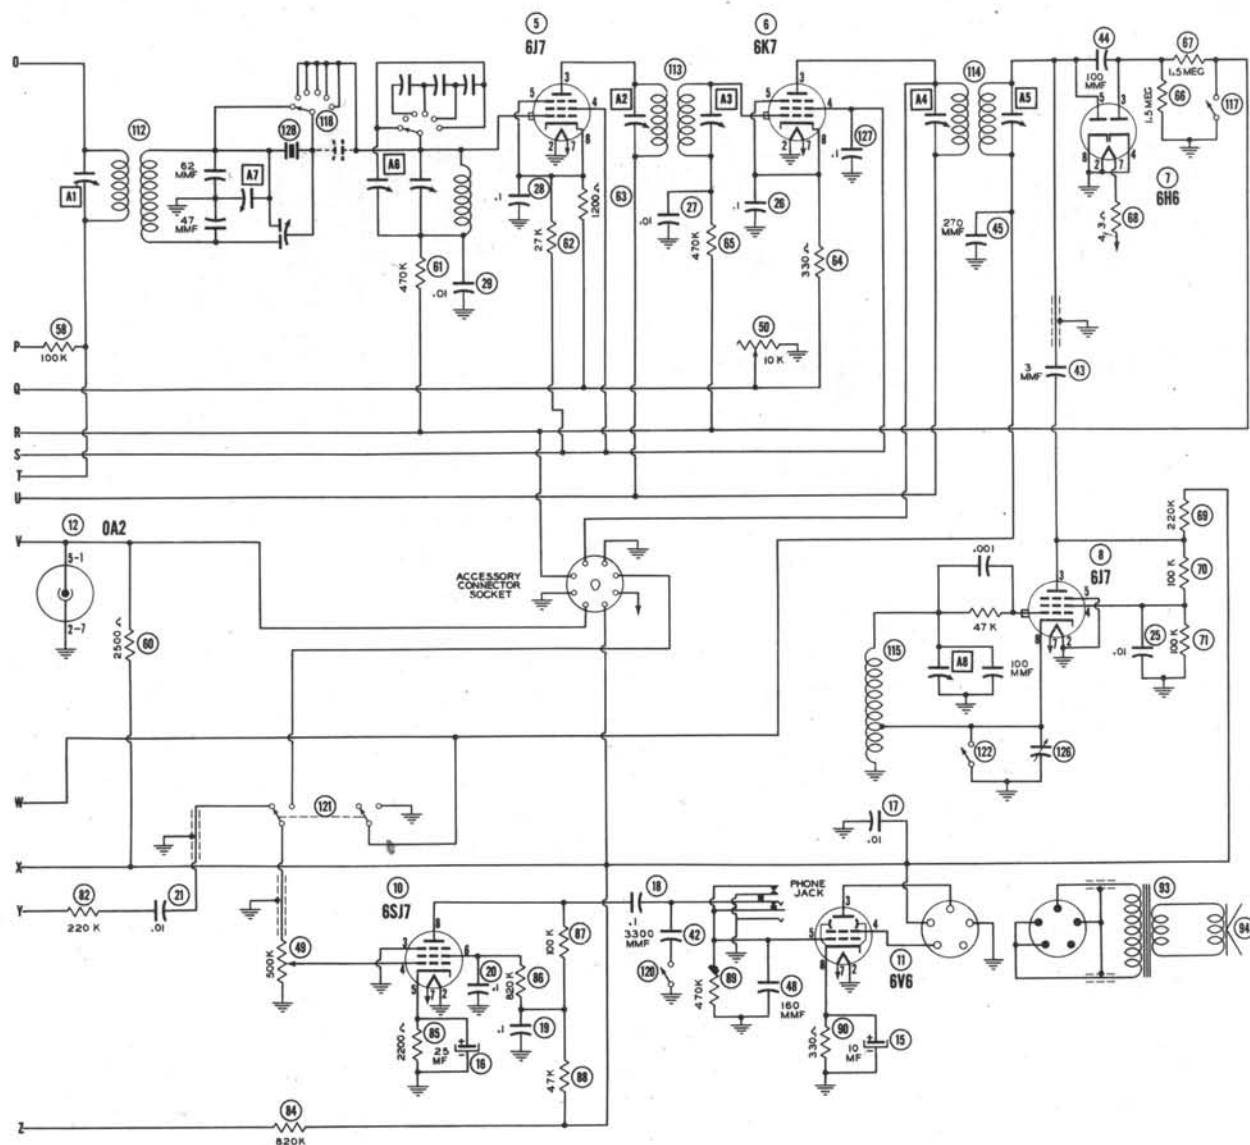


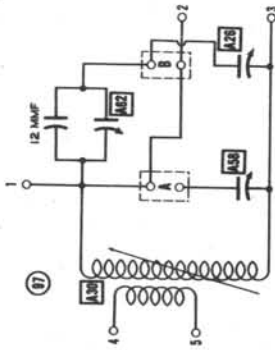




BAND C

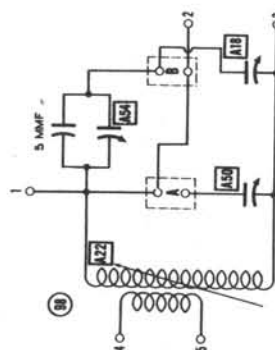


BAND B

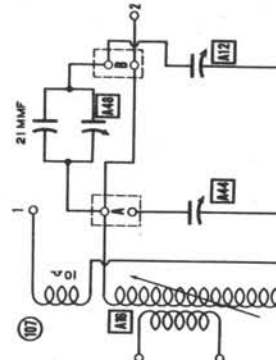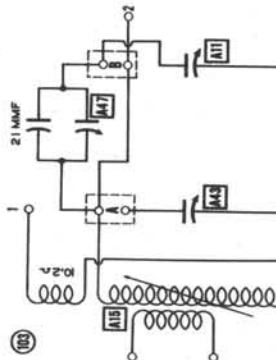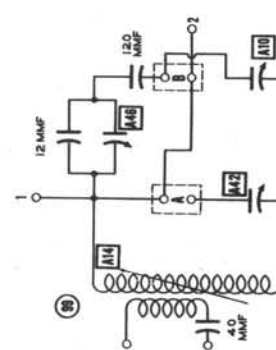

BAND A

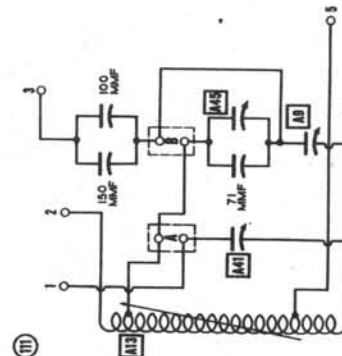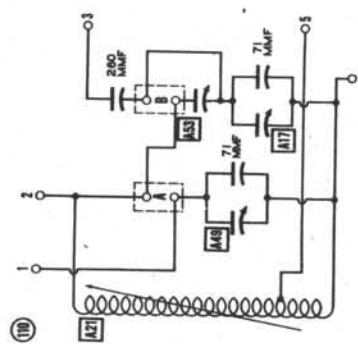

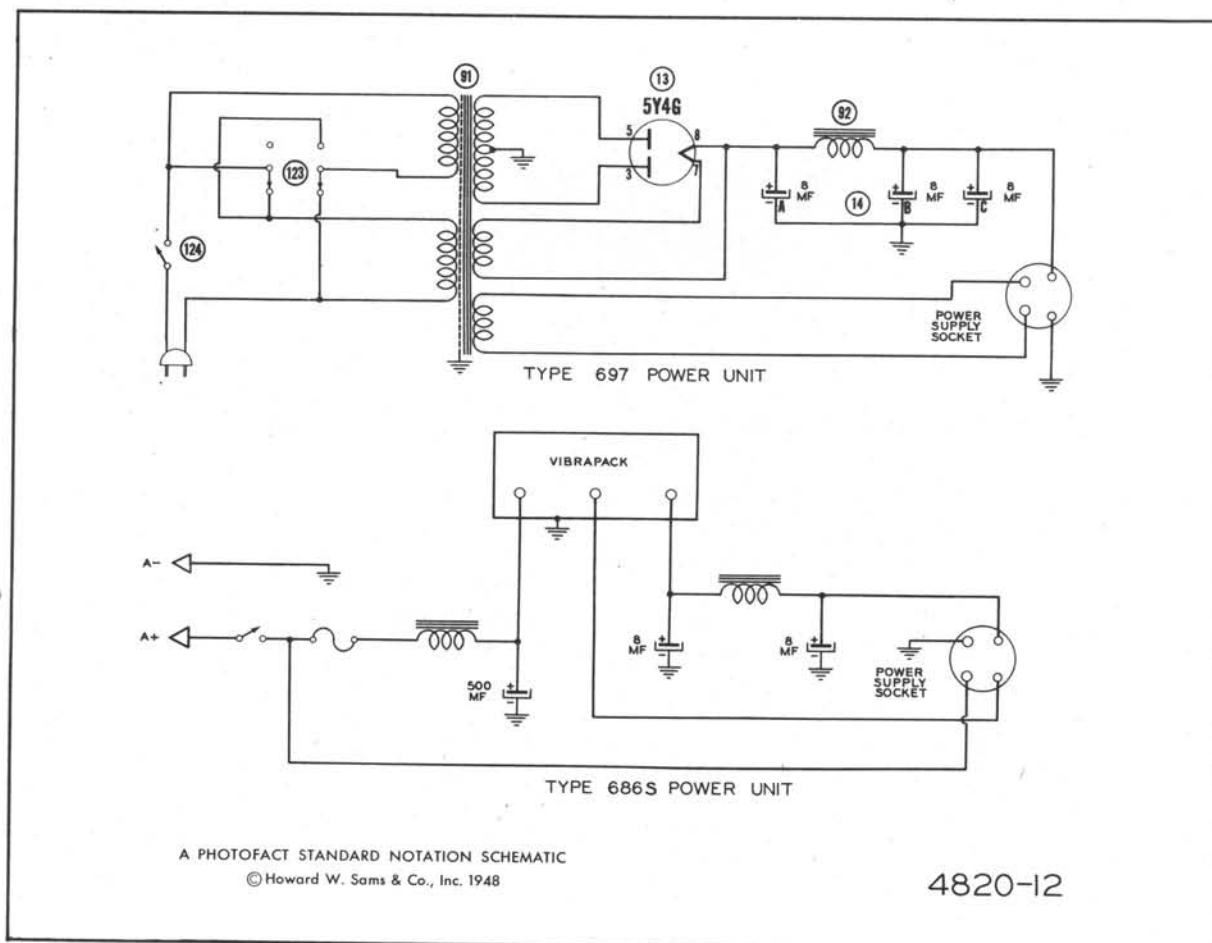

MAIN TUNING DIAL

The main tuning dial should normally give no trouble. If, however, the dial should become removed from the Receiver it should NOT be operated until mounted on the condenser shaft WITH SET-SCREWS TIGHT. This is because the dial is only designed to rotate for ten revolutions (0 to 500) and if turned farther than this the mechanism will be damaged. When mounted on the condenser, limit stops protect the dial provided the assembly is properly done. The procedure for re-mounting the dial is as follows:

(a) Place dial on condenser shaft, tighten set-screws and turn dial counter-clockwise to fully mesh condenser rotor plates so that the tips of the rotor plates are flush with the edge of the stator plates.

(b) Loosen set-screws and rotate dial slowly until dial reading has decreased to zero.

(c) Tighten the set-screws.

(d) Check position of rotor plates at zero. The tips of the rotor plates should be flush with the edge of the stator plates at zero. A slight adjustment may be necessary and this is done by loosening the set-screws, adjusting the position of the dial and tightening the set-screws again.

If it is necessary to remove the dial at any future time, turn to 250 before removing the dial, and do not disturb the setting of either the dial or condenser until reassembled. If in doubt about the correct position, inspect the springs on the back of the dial. When the dial reads 250 these springs should be straight-up-and-down, they must not be tipped to one side.

It is important that the backplate and dial do not become separated.

The backplate is held in place by two springs so that its gear teeth mesh with the dial gear teeth in correct relationship for proper dial operation. If this backplate should be sprung out of place, it may return to an incorrect position and the proper dial numbers will not appear in the windows when the dial is used. To ascertain that the two parts are in correct position, proceed as follows:

(a) Locate small window near outer periphery of dial backplate and also locate dial number window on face of dial which is 180° removed from the small backplate window.

(b) Hold dial so backplate lies flat in palm of left-hand and with right hand rotate dial knob until 250 appears in previously located dial window.

(c) If dial is properly adjusted it will be noted that the pointer at the outer edge of the small window lines up with a marked tooth on the dial itself. It will be found that the dial and backplate can be moved so that the backplate pointer will mesh between teeth at points equi-distant from marked tooth in either direction.

(d) If by checking as in paragraph (c), the dial is found not properly adjusted, it will be necessary to separate the backplate from the dial far enough to bring the two gears out of mesh and then re-mesh the two parts until the proper setting is found. A number of trials may be required before the correct mesh is found.

BANDSPREAD SWITCHING PROCEDURE

The bandspread switch for bands A, B, C and D are located on each coil set. Inspection of the coil set terminal panels will show several small rectangular metal pieces. There are two of these metal pieces or terminal blocks on each coil which are tapped and countersunk for a flat-head machine screw. It will be noted that these terminal blocks correspond to contacts numbered 1 and 2 on the antenna and RF coils and to contacts numbered 2 and 3 on the oscillator coils. Looking at the coil forms from the front and top the bandswitch screws must be in the left-hand position (in line with contact #2 of the antenna and RF coils and contact #3 of the oscillator coil) for general coverage tuning. On the schematic diagram and the circuit diagrams of the individual coils this position is designated with the letter "B". The coil range will be shown on the top scale of the calibration chart on the front of each coil set. To change to bandspread it is necessary to move the screw to the right-hand position (in line with contact #1 on the antenna and RF coils and contact #2 on the oscillator coil). On the schematic diagram and the circuit diagrams of the individual coils this position is designated with the letter "A". The coil range will be shown on the bottom scale of the calibration chart on the front of each coil set. The numbers shown on the schematic diagram and the circuit diagrams of the individual coils correspond to the contacts as they are numbered on each coil set.

VOLTAGE AND RESISTANCE TAKEN WITH AC LINE SET AT 115V AC.
 VOLTAGE AND RESISTANCE TAKEN ON BAND "D".
 SELECTIVITY CONTROL IN OFF POSITION.
 TONE CONTROL SET AT HIGH POSITION.
 RF GAIN SET AT MAXIMUM. AF GAIN SET AT MINIMUM.
 PHASING CONTROL AT 0. AVC ON. B+ SWITCH ON.
 RADIO-PHONO SWITCH IN RADIO POSITION.

VOLTAGE READINGS

Item	Tube	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8
1	6K7	0V.	0V.	220VDC	85VDC	2.6VDC	0V.	6.2VAC	2.6VDC
2	6K7	0V.	0V.	220VDC	85VDC	2.6VDC	0V.	6.2VAC	2.6VDC
3	6J7	0V.	0V.	220VDC	180VDC	8VDC	0V.	6.2VAC	8VDC
4	6C4	150VDC	0V.	0V.	6.2VAC	150VDC	-25VDC§	0V.	-
5	6J7	0V.	0V.	205VDC	85VDC	4VDC	0V.	6.2VAC	4VDC
6	6K7	0V.	0V.	205VDC	85VDC	2.6VDC	0V.	6.2VAC	2.6VDC
7	6H6	0V.	0V.	0V.	0V.	-.1VDC	-.1VDC	5VAC	0V.
8	6J7	0V.	0V.	50VDC	20VDC	0V.	0V.	6.2VAC	0V.
9	6H6	0V.	0V.	0V.	0V.	0V.	0V.	5VAC	0V.
10	6SJ7	0V.	0V.	0V.	0V.	1.6VDC	45VDC	6.2VAC	115VDC
11	6V6GT	0V.	0V.	210VDC	220VDC	0V.	0V.	6.2VAC	12.5VDC
12	0A2	150VDC	0V.	0V.	0V.	150VDC	0V.	0V.	-
13	5Y3GT	0V.	250VDC	0V.	295VAC	0V.	295VAC	0V.	250VDC

§ TAKEN WITH VACUUM TUBE VOLTMETER.

RESISTANCE READINGS

Item	Tube	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8
1	6K7	0Ω	0Ω	40KΩ	30KΩ	330Ω	INF.	.1Ω	330Ω
2	6K7	0Ω	0Ω	40KΩ	30KΩ	330Ω	INF.	.1Ω	330Ω
3	6J7	0Ω	0Ω	40KΩ	140KΩ	4.7KΩ	INF.	.1Ω	4.7KΩ
4	6C4	40KΩ	INF.	0Ω	.1Ω	40KΩ	22KΩ	.4Ω	-
5	6J7	0Ω	0Ω	40KΩ	30KΩ	1.2KΩ	INF.	.1Ω	1.2KΩ
6	6K7	0Ω	0Ω	40KΩ	30KΩ	330Ω	INF.	.1Ω	330Ω
7	6H6	0Ω	0Ω	1.5 Meg	0Ω	120KΩ	120KΩ	4.4Ω	0Ω
8	6J7	0Ω	0Ω	130KΩ	100KΩ	0Ω	INF.	.1Ω	0Ω
9	6H6	0Ω	0Ω	220KΩ	700KΩ	460KΩ	1.5 Meg.	4.4Ω	220KΩ
10	6SJ7	0Ω	0Ω	0Ω	500KΩ	2.2KΩ	1 Meg.	.1Ω	170KΩ
11	6V6GT	0Ω	0Ω	40KΩ	40KΩ	470KΩ	INF.	.1Ω	330Ω
12	0A2	40KΩ	0Ω	INF.	0Ω	40KΩ	0Ω	0Ω	-
13	5Y3GT	INF.	40KΩ	INF.	340Ω	INF.	355Ω	INF.	40KΩ

*LIMITER CONTROL ON.

#CWO ON.

RESISTANCE READINGS IN THE B+ CIRCUITS MAY VARY WIDELY
 ACCORDING TO THE CONDITION OF THE FILTER CAPACITORS

- DC Voltage measurements are at 20,000 ohms per volt; AC Voltages measured at 1,000 ohms.
- Socket connections are shown as bottom views.
- Measured values are from socket pin to common negative.
- Line voltage maintained at 117 volts for voltage readings.
- Nominal tolerance on component values makes possible a variation of $\pm 15\%$ in voltage and resistance readings.
- Volume control at maximum, no signal applied for voltage measurements.