



A. V. ROE CANADA LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT (Aircraft)

AIRCRAFT: C-105

REPORT NO. P/Wind Tunnel/9

FILE NO.

NO OF SHEETS

TITLE

C.A.L. TESTS SEPT. 1953

COMPARISON OF ESTIMATES

WITH WIND TUNNEL RESULTS

UNCLASSIFIED / NON CLASSIFIED
SECRET

Classification cancelled / changed to: UNCLASSIFIED

By authority of: DRDA 7/DARET 5-8/DAS Eng 6-4-5

Date: 5 Nov 1992

Signature: Bailey

Unit / Rank / Appointment: DSIS B. Secretary CRAD HQ DRP

PREPARED BY

DATE Sept. 1953.

CHECKED BY

DATE

SUPERVISED BY

DATE

APPROVED BY

DATE

ISSUE NO	REVISION NO	REVISED BY	APPROVED BY	DATE	REMARKS

FORM 136A

Object 135

NRC 3683

UNCLASSIFIED / NON CLASSIFIED

$$\Delta C_{DB} = \frac{(P_8 - P_5) \cdot 53}{9M \cdot 5W}$$

ps is shaft pressure in tobacco region cm Hg

$$5B = .02915 \text{ sq. ft. (2)}$$
$$q_m = \text{free stream dynamic pressure, p.s.f.}$$
$$1060' = \frac{1.102}{.00915} = \frac{58}{58}$$
$$1 \text{ cm.Hg.} = \frac{1}{2.54} \text{ in.Hg.} = \frac{2.54}{29.9217} \text{ ps.f} = 27.8 \text{ ps.f}$$
$$\Delta C_p \approx 1001 \times C_p$$

Corrected $C_p = +0.848$

8/10

02763

85820
20220

COMPARISON OF ESTIMATES WITH WIND TUNNEL RESULTSCONTENTS

	<u>Page</u>
<u>I DESCRIPTION</u>	
1 Summary	1.1
2 Introduction	1.1
3 Model	1.2
4 Results	1.3
5 Discussion	1.4
6 Conclusions	1.8
7 Model General Arrangement	1.9
<u>II LONGITUDINAL STABILITY</u>	
1 Aerocentre position vs Mach number	2.1
2 $C_{L\alpha}$ vs Mach number	2.2
3 C_{M_0} vs Mach number (cambered & uncambered wing)	2.3
<u>III LONGITUDINAL CONTROL</u>	
1 $C_{L\delta}$ vs Mach number	3.1
2 Centre of pressure of elevator load vs Mach number	3.2
3 $C_{M\delta}$ vs Mach number at constant α & constant C_L	3.3
4 $C_{h\alpha}$ vs Mach number	3.4
5 $C_{h\delta}$ vs Mach number	3.5
<u>IV DRAG DATA</u>	
1 $C_{D_{MIN}}$ vs Mach number	4.1
2 e vs Mach number	4.2
3 $\frac{\Delta C_{D_{MIN}}}{\delta^2}$ vs Mach number	4.3
4 $\Delta(\frac{\partial C_F}{\partial C_L^2})/\delta$ vs Mach number	4.4
5 C_L at $C_{D_{MIN}}$ vs Mach number	4.5

UNCLASSIFIED / NON CLASSIFIED

A. V. ROE CANADA LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT (Aircraft)

REPORT NO. P/Wind Tunnel/2

SHEET NO. 1.1

AIRCRAFT: C 105

PREPARED BY

DATE

J.A. Chamberlin

Sept. 11/53.

CHECKED BY

DATE

1 SUMMARY

Wind tunnel tests of the Avro C-105 were conducted in the 3' x 4' transonic throat of the Cornell variable Density Wind Tunnel to confirm the predicted performance estimates which were based on the use of a small amount of negative wing camber to reduce the elevator drag in flight at high altitudes. The basic drag, the longitudinal stability and the effect of camber were in excellent agreement with the estimates. The elevator effectiveness, hinge moments and drag were found to be more favorable than had been anticipated by a substantial margin. It is hence concluded that these tests have confirmed the validity of the assumptions used in estimating the performance and established the basic soundness of the configuration.

2 INTRODUCTION

R.C.A.F. Spec. AIR 7-3⁽¹⁾ calls for a design study of a supersonic fighter meeting the detail requirements laid down therein. One of these requirements is that the aerodynamic data on which the study is based be confirmed by wind tunnel tests. Accordingly, tests were conducted in the 3' x 4' transonic throat of the Cornell Variable Density Wind Tunnel from Aug. 27 to Sept. 2 on a model of the configuration which was selected by the R.C.A.F. (as the one which best met their requirements), on the basis of the data given in Avro Design Study Report No. P/C105/1⁽²⁾.

UNCLASSIFIED / NON CLASSIFIÉ
TECHNICAL DEPARTMENT (Aircraft)

REPORT NO. P/Wind Tunnel/9

SHEET NO. 1.2

AIRCRAFT: C 105

PREPARED BY

DATE

J.A. Chamberlin

Sept. 11/53.

CHECKED BY

DATE

2 INTRODUCTION (Continued)

This report gives a summary of the results of these tests and compares them with the data used in the Design Study (2). It was pointed out in that study that one of the major features of the design was the use of negative wing camber in order to reduce elevator angles required at high altitudes and hence the elevator drag. Furthermore, it was made clear that adequate test data on which to base the effectiveness of camber did not exist and that information on elevator drag was not altogether satisfactory. The purpose of these tests was to resolve these matters, as well as to confirm the other data on which reasonably satisfactory information was already in existence.

3 MODEL

The model was made to .03 scale for sting mounting in the 3' x 4' transonic throat of the Cornell Variable Density Wind Tunnel. The aircraft dimensions are given on the general arrangements shown on sheet 1.9. The model was of metal construction and housed specially designed strain gauge balances within the fuselage. A free passage for air was allowed within the fuselage between the engine intake ducts and the jet nozzle. Two wings were made for the model; one without camber, and one cambered the required amount. Only the uncambered wing was fitted with elevators. The elevator on the port side was fitted with strain gauges for measuring hinge moments.

UNCLASSIFIED / NON CLASSIFIED

A. V. ROE CANADA LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT (Aircraft)

AIRCRAFT C 105

REPORT NO. F/Wind Tunnel/9

SHEET NO. 2.3

PREPARED BY

DATE

J.A. Chamberlin

Sept. 11/53.

CHECKED BY

DATE

3 MODEL (Continued)

The transonic throat of the tunnel is of a type specially developed by Cornell and employs suction through the porous walls of the working section to avoid choking and incidentally to avoid all tunnel constraint corrections as well as interference from reflected shocks. The present throat was originally intended as a model to establish the design requirements for modifications to the entire working section of the tunnel. However, the model has proved so successful that it is being used extensively for routine testing pending the development of the full scale throat. This will require some time, since the suction requirements are so large that special equipment will have to be provided, having a capacity greatly exceeding that of the two J 35 jet engine compressors which are used to provide suction for the small working section.

4 RESULTS

The results have been reduced to coefficient form and are compared with estimated values on the graphs given in sections II to IV of this report. The basic data from which the coefficients were derived is contained in Ref. 3.

UNCLASSIFIED / NON CLASSIFIÉ

A. V. ROE CANADA LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT (Aircraft)

AIRCRAFT: C 105

REPORT NO. P/Wind Tunnel/9

SHEET NO. 1.4

PREPARED BY

DATE

J.A. Chamberlin

11 Sept./53.

CHECKED BY

DATE

5 DISCUSSION

5.1 Longitudinal Stability

5.1.1 Aerocentre *n!*

Figure 2.1 shows excellent agreement between the test and estimated positions for the aerocentre. This confirms that c.g. limits assumed are reliable. The effect of camber on this is not appreciable, as was expected.

5.1.2 Lift

The slope of the lift curve with incidence as obtained from test agrees well with the estimates as shown on Sheet 2.2. Furthermore it has been shown on Sheet 5.1.1 of ref. 3 that the low speed $C_{L_{max}}$ is in good agreement with estimates and is not affected by camber. The C_L 's at higher speeds were not extended above about 0.7. There was no evidence of stalling or buffeting with this range, which was more than adequate to achieve the estimated manoeuvre envelope.

5.1.3 Camber Effectiveness

The effect of camber on C_{M_0} is shown on Sheet 2.3. It can be seen that the cambered wing gives a C_{M_0} that is in very good *agreement with the estimate*. In view of the scanty evidence on which the estimate was based, this is extremely gratifying. The fact that there is not as high a peak as estimated between $M = 1.0$ and 1.2 is very favorable. The agreement elsewhere should assure the validity of the previous estimates.

UNCLASSIFIED / NON CLASSIFIE
A. V. ROE CANADA LIMITED
MALTON, ONTARIO
TECHNICAL DEPARTMENT (Aircraft)

REPORT NO. P/Wind Tunnel/9

SHEET NO. 1.5

AIRCRAFT:

C-105

PREPARED BY

DATE

J. A. Chamberlin

Sept. 11/53

CHECKED BY

DATE

5 DISCUSSION - Cont'd.

5.2 Longitudinal Control

5.2.1 Elevator Effectiveness

The elevator control characteristics are compared with the estimates on sheets 3.1 and 3.2 in terms of lift effectiveness & point of application of the lift respectively. These two elements are combined to give the moment effectiveness on Sheet 3.2.2 which is the primary criterion of longitudinal control. This shows that the experimental effectiveness is considerably better than the estimate below $M = 1.13$. Above this it is inferior. However, the experimental curve can be smoothly extrapolated to agree with the estimates above about $M = 1.5$.

Here ... they be when all experiments / evidence plus
Since estimated values above this speed are believed to be very reliable, this seems a very reasonable extrapolation.

Nonsense

It is of very considerable interest to note that the effectiveness is linear with elevator deflections up to 30° through the transonic region.

On the basis of these results the trim troubles near $M = 1.0$ should be greatly alleviated by the very high effectiveness in this region, while the slight deficiency between $M = 1.13$ and $M = 1.5$ is not felt to be very serious, especially since its effect will be alleviated by the fact that the aerocentre does not move back as much as was anticipated between these Mach numbers, and the hinge moment coefficients are lower than estimated as noted below.

TECHNICAL DEPARTMENT (Aircraft)

AIRCRAFT C 105

REPORT NO. F/Wind Tunnel/9

SHEET NO. 1.6

PREPARED BY

DATE

J. A. Chamberlin

11 Sept. 53

CHECKED BY

DATE

5 DISCUSSION - Cont'd.

5.2 Longitudinal Control

5.2.2 Elevator Hinge Moments

The elevator hinge moment coefficients are shown on Sheets 3.4 and 3.5. They are considerably lower than was forecast. This will permit increased manoeuvrability since the maximum hinge moment that can be developed is limited by mechanical considerations.

5.3 Drag

5.3.1 Basic Drag

||| The values of C_{D_0} given on Sheet 4.1 are in good agreement with the estimate. However the wind tunnel values cannot be considered as particularly reliable in this case, since a correction equal to about one third of the measured drag has to be applied to allow for internal flow in the ducts and for the base drag of the sting. These corrections must be estimated on the basis of a somewhat inadequate pressure measurement in the model, and hence may be subject to considerable error. The correction should not vary appreciably with α or δ , so that the above reservations about the accuracy of the drag data apply only to the values of C_{D_0} .

The induced drag efficiency factor "e" is shown on Sheet 4.2. This is slightly higher than expected at Mach numbers over 0.8. This will result in slightly lower drag at high altitudes.

5.3.2 Elevator Drag.

The elevator drag coefficients are given on Sheets 4.3 and 4.4. It can be seen from Fig. 4.3 that the variation of profile

UNCLASSIFIED / NON CLASSIFIED

A. V. ROE CANADA LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT (Aircraft)

REPORT NO. P/Wind Tunnel/9SHEET NO. 1.7

AIRCRAFT C 105

PREPARED BY

DATE

J. A. Chamberlin

11 Sept. 53

CHECKED BY

DATE

5. DISCUSSION - Cont'd.5.3 Drag

5.3.2 Elevator drag - Cont'd.

drag with elevator deflection is considerably below the estimate based on wind tunnel tests and tends more to the values obtained from rocket propelled models. The effect on the induced drag can be seen from Fig. 4.4 to be very much less than that obtained from any source previously.

This should result in a substantial reduction in the elevator drag over those used in the previous estimates which were based on N.A.C.A. wind tunnel data.

5.4 Effect of Reynolds Number

To assess Reynolds number effects, two runs were made at $M = .9$ at $R.N. = 1.5 \times 10^6$ and 3.4×10^6 . Detailed results are presented in Ref. 3 Section VI. They show that the influence of Reynolds number is negligible. This is substantiated further by the fact that the present results are on the whole in excellent agreement with predictions based chiefly on free flight rocket propelled model data usually obtained at Reynolds numbers of the order of 20×10^6 .

UNCLASSIFIED / NON CLASSIFIE

A. V. ROE CANADA LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT (Aircraft)

AIRCRAFT: C105

REPORT NO. P/Wind Tunnel/9

SHEET NO. 1.3

PREPARED BY

DATE

J.A. Chamberlin

Sept. 11/53.

CHECKED BY

DATE

6 CONCLUSIONS

The comparison of data obtained from the transonic wind tunnel test of C-105 at Cornell Aeronautical Laboratories Inc. with the original estimates of aerodynamic characteristics indicate that:


- (1) Longitudinal stability will be entirely satisfactory and is very close to the estimate.
- (2) Manoeuvrability will be better than expected in the entire Speed Range notably at low speed and high subsonic speeds.
- (3) Performance will be appreciably better than estimated.
- (4) Cornell Transonic Wind Tunnel is an excellent experimental tool, and will be of great use in the further development of the project: the data obtained being in close agreement with free flight high R.N. rocket tests.

REFERENCES

- (1) R.C.A.F. Spec. AIR 7-3 Design Studies of Prototype All-Weather Interceptor Aircraft - Issue 2, May 1953.
- (2) Design Study of Supersonic All-Weather Interceptor Aircraft - Avro Report No. P/C-105/1
- (3) Avro Report No. P/WT/7 - C.A.L. Tests Sept. 1953 - Corrected Plots.

GENERAL ARRANGEMENTTRANSONIC MODEL

UNCLASSIFIED / NON CLASSIFÉ

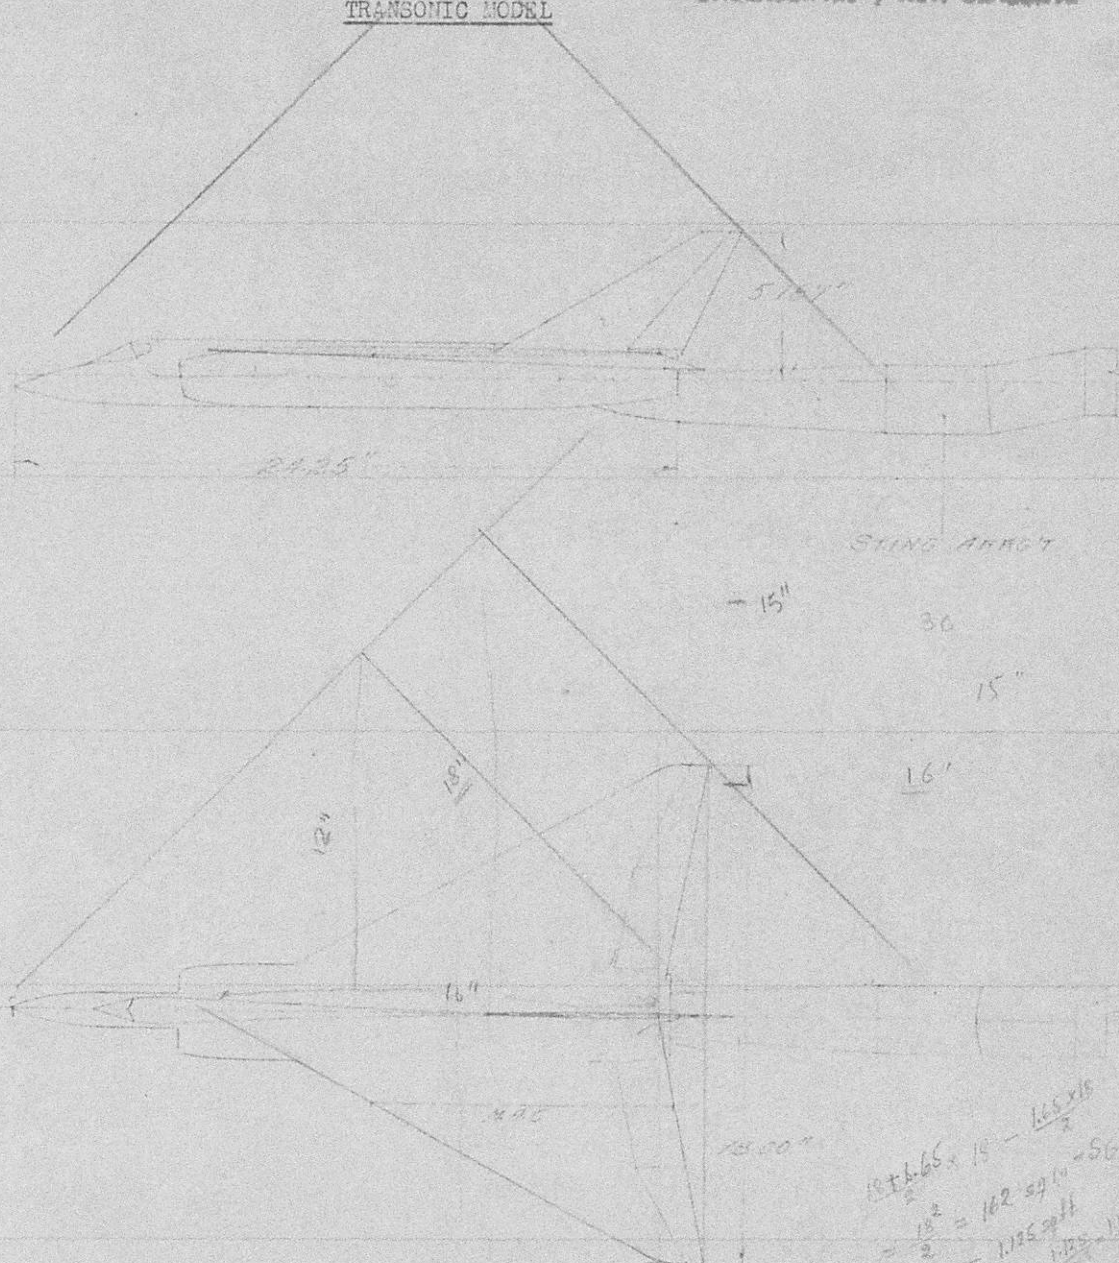

$$\begin{aligned}
 & 18 + 6.65 \times 15 = \frac{6.65 \times 15}{2} \\
 & = \frac{18}{2} = 162.5911 = 56 \\
 & = 1.125 \text{ sq ft} \\
 & \text{Full scale: } \frac{1.125}{0.007} = 1250 \text{ sq ft}
 \end{aligned}$$

1 = 33.33

SCALE 1/4" = 1"

UNCLASSIFIED / NON CLASSIFIED
COMPONENT


AIRCRAFT
A. U. W.

SHEET NO. 2.1

DATE SEPT. 53.

REPORT NO. P/W.T.19

PREP. BY CLARK

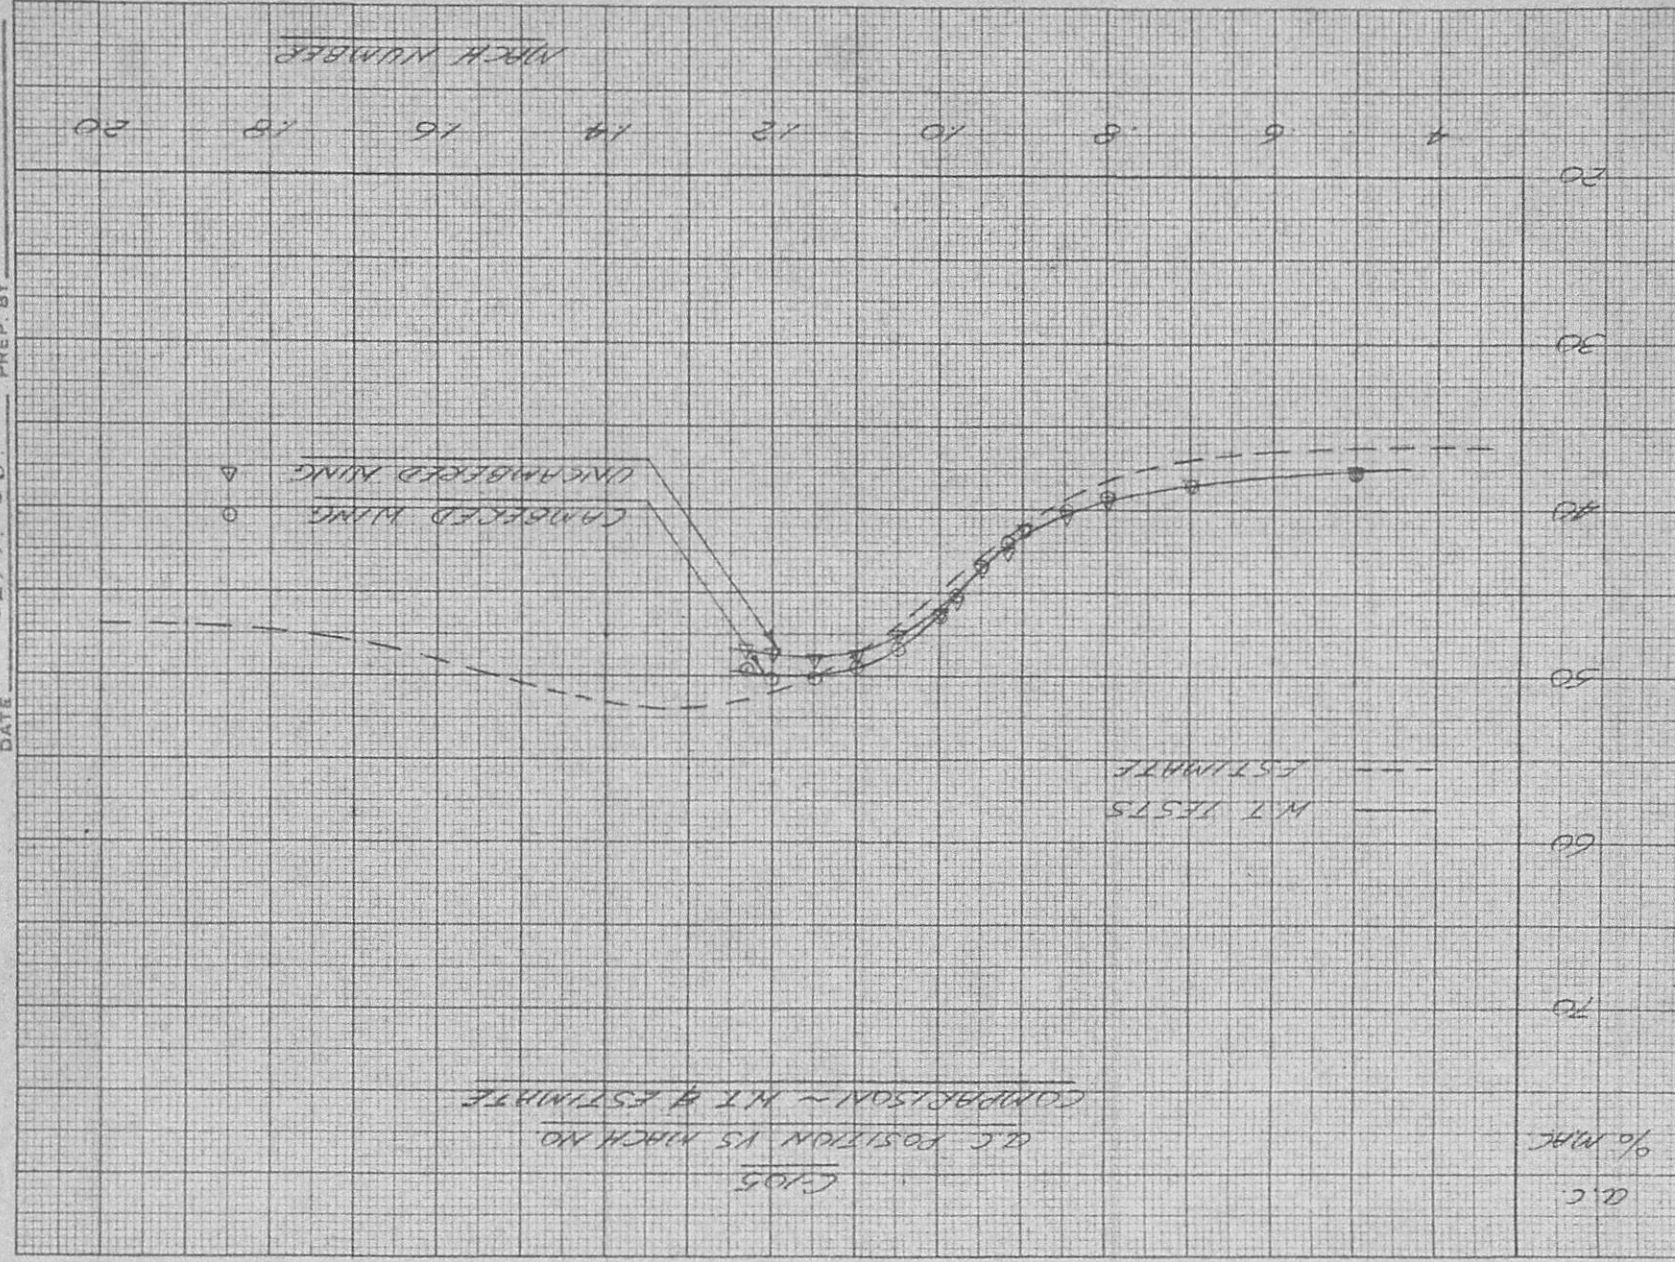

AIRCRAFT C105
A.U.W.

COMPONENT

SHEET No. 2.2

DATE SEPT 9 / 53

REPORT No P/WIND TUNNEL/9

PREP BY J. K. H. R. S. K.

UNCLASSIFIED / NON CLASSIFIED

C105
COMPARISON OF ESTIMATES & W.T. RESULTS

C_{LX} VS. MACH No
 $-2^\circ < \alpha < +2^\circ$


EXPERIMENTAL POINTS:

UNCAMBERED AIRING

WITH NEGATIVE CAMBER

Experimental Points

ESTIMATE

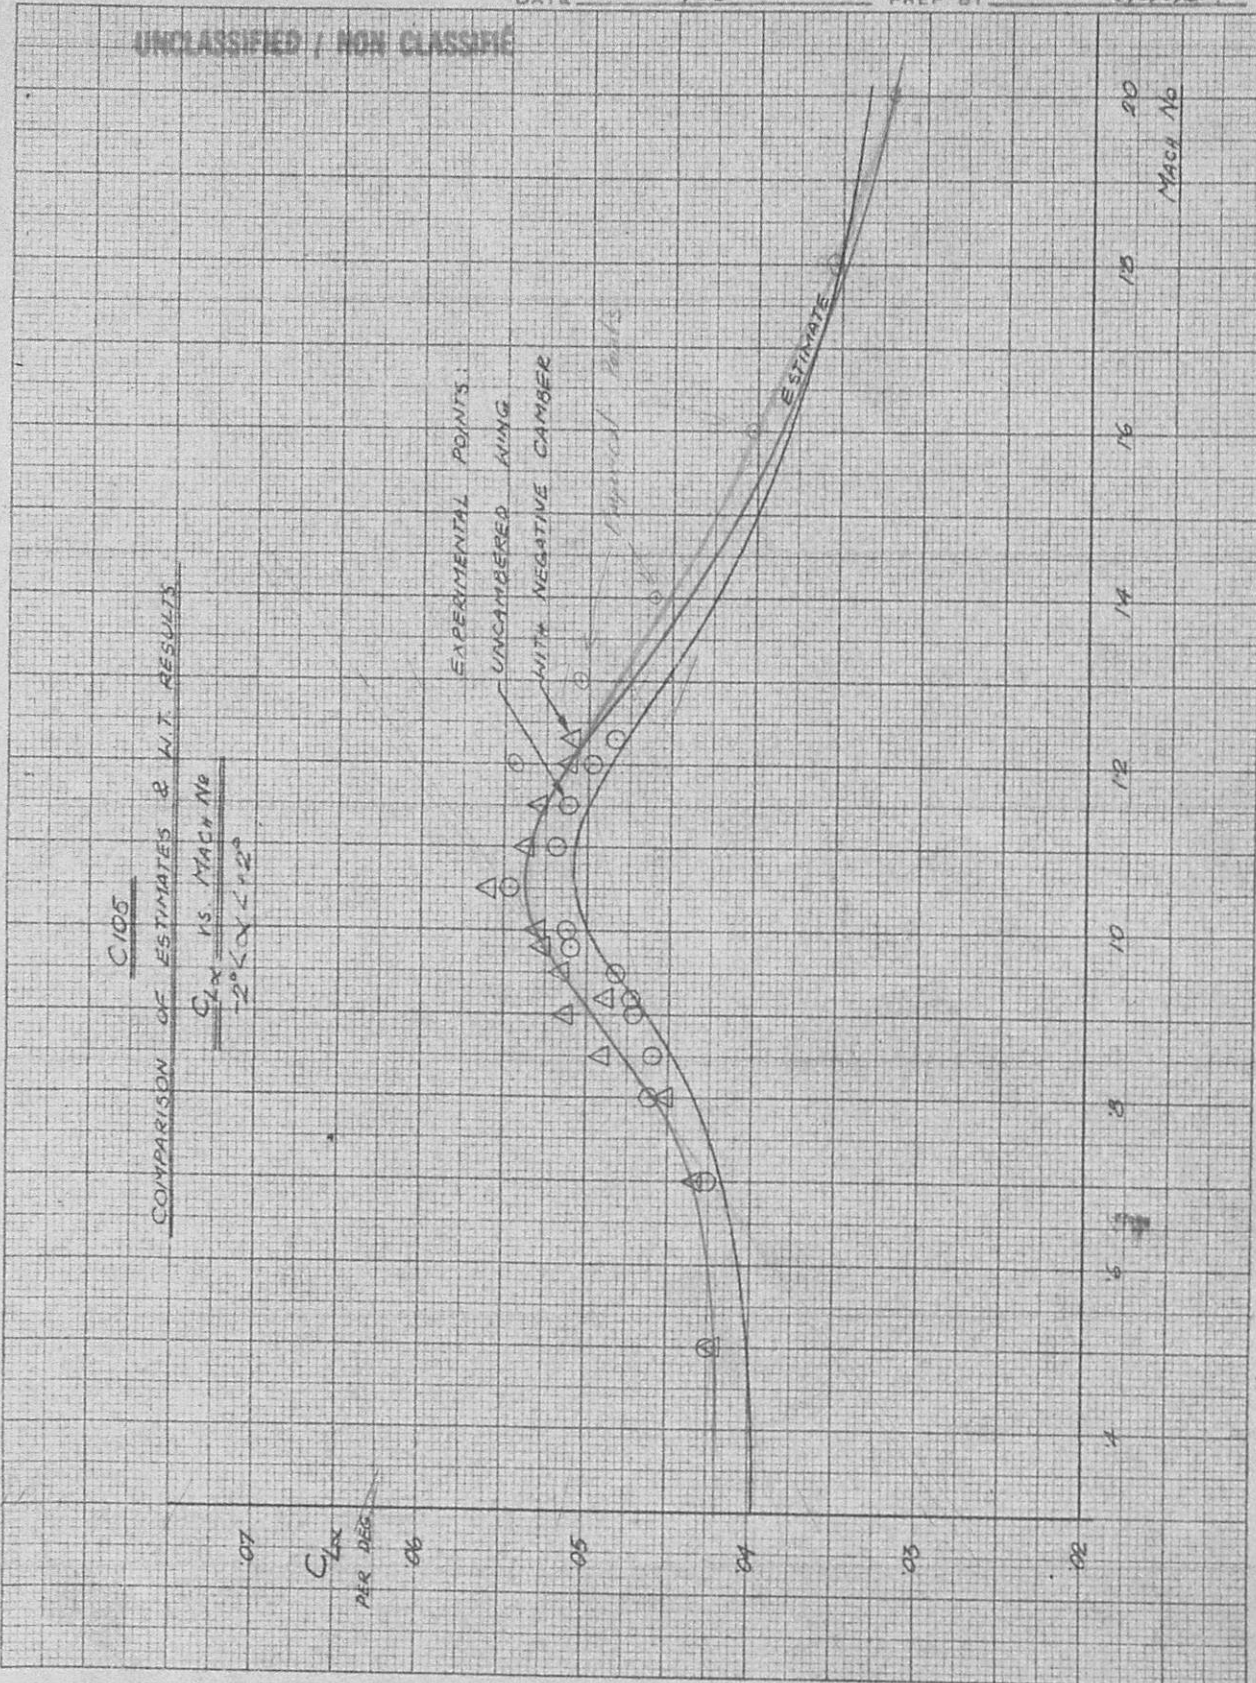


AIRCRAFT
A. V. M.

COMPONENT


SHEET No. 23
DATE SEPT 58

REPORT NO. P/N.T./S
PREP BY CLARK

UNCLASSIFIED / NON CLASSIFIED

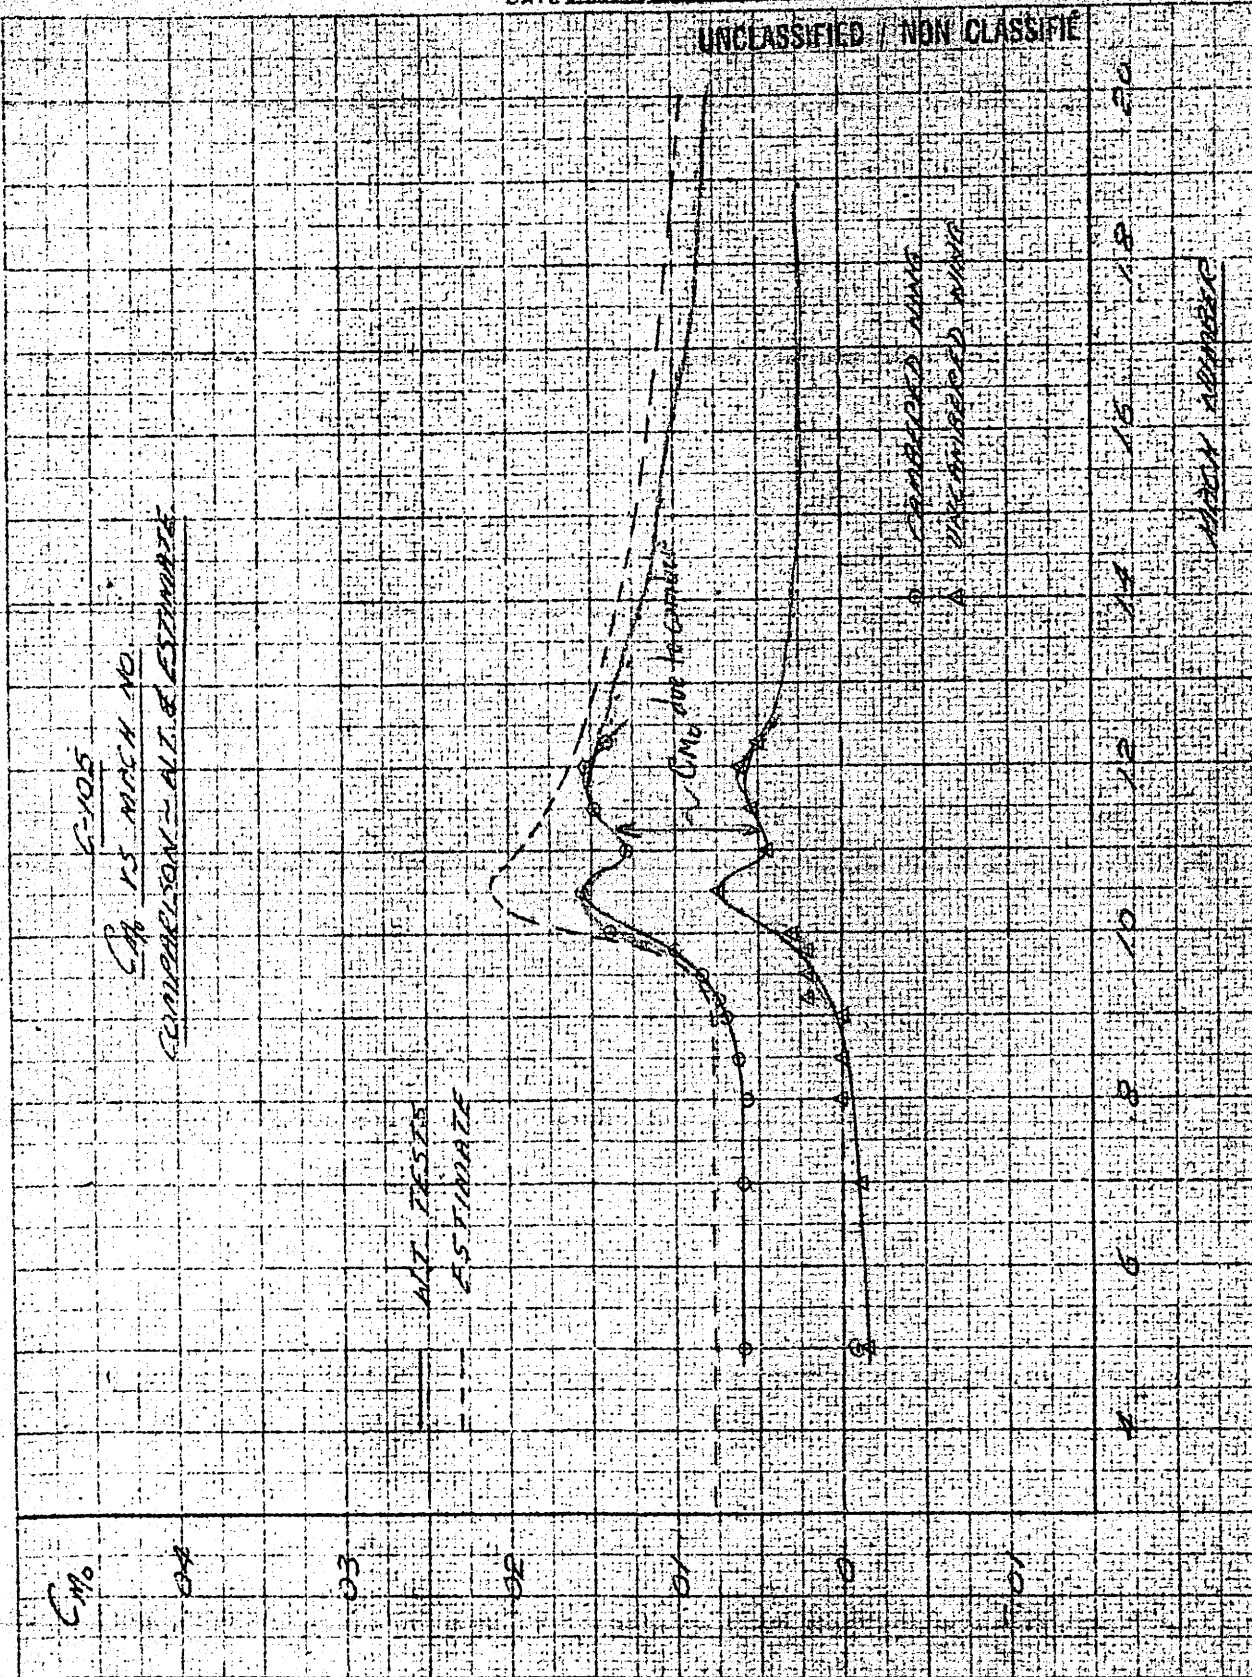

UNCLASSIFIED / NON CLASSIFIED

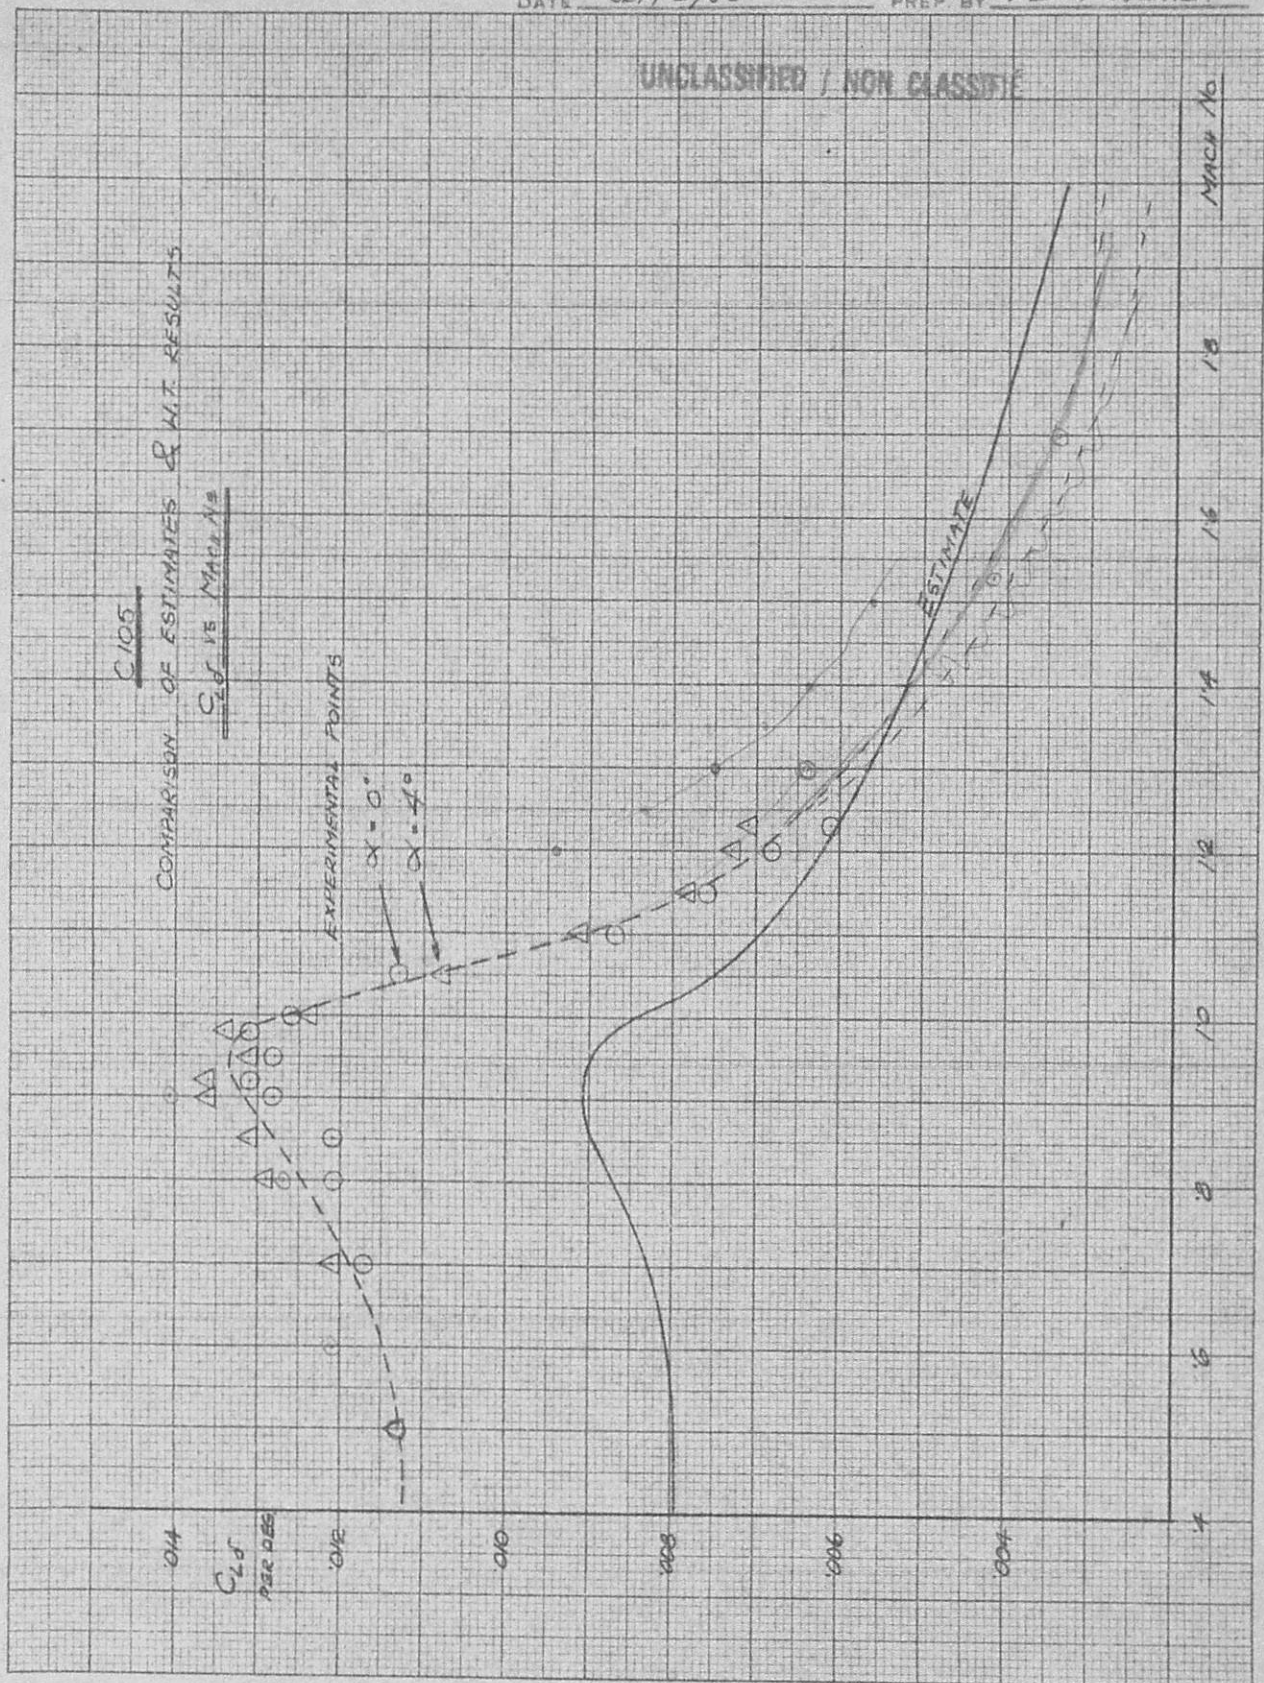

AIRCRAFT C-105
A.U.W.

COMPONENT CP VS M


SHEET NO. 3-2

DATE SEPT. 9, 1953

REPORT NO. P WIND TUNNEL 19

PREP BY J. H. HARRIS

UNCLASSIFIED / NON CLASSIFIED

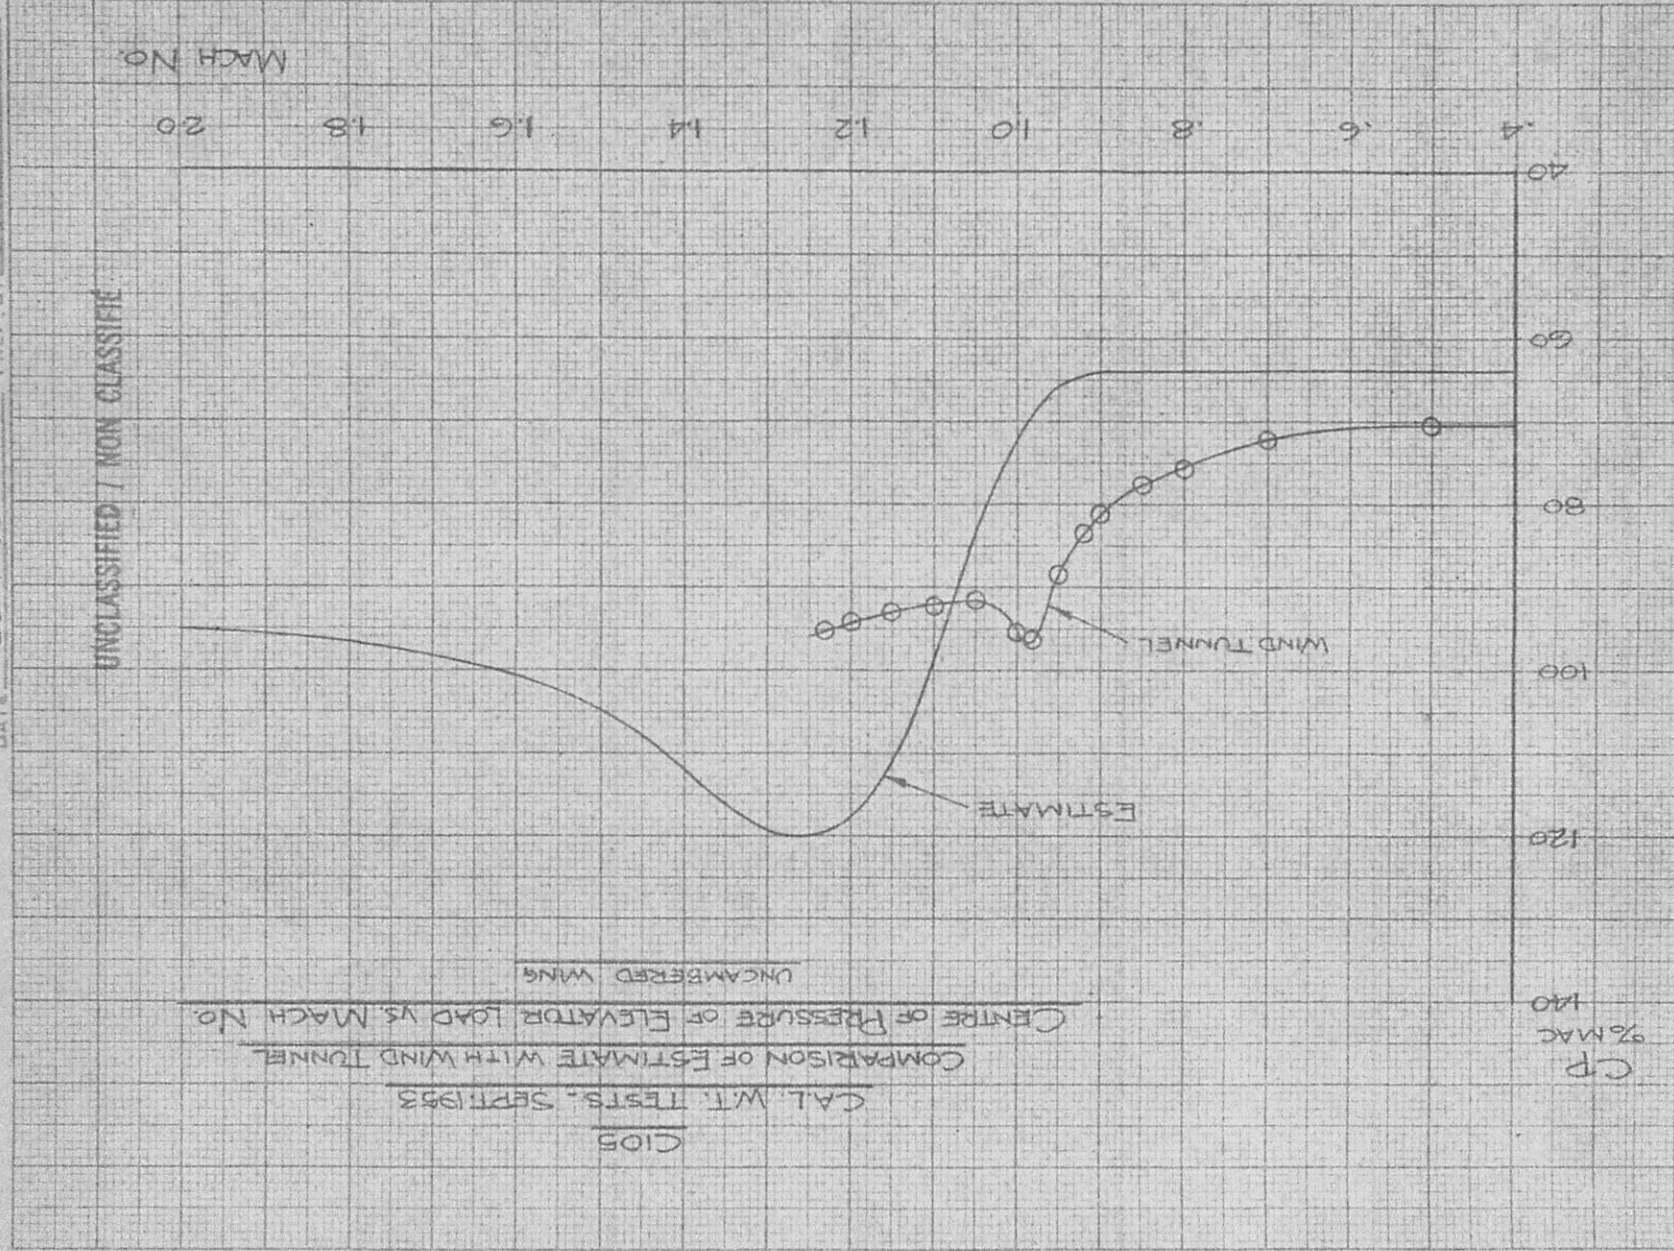

FORM 174E


AIRCRAFT C105
ALL W.

COMPONENT


SHEET NO. 33.1

REPORT NO. P/WIND TUNNEL/9
PREP. BY. Warren

UNCLASSIFIED / NON CLASSIFIED
DATE: SEPT 9/53

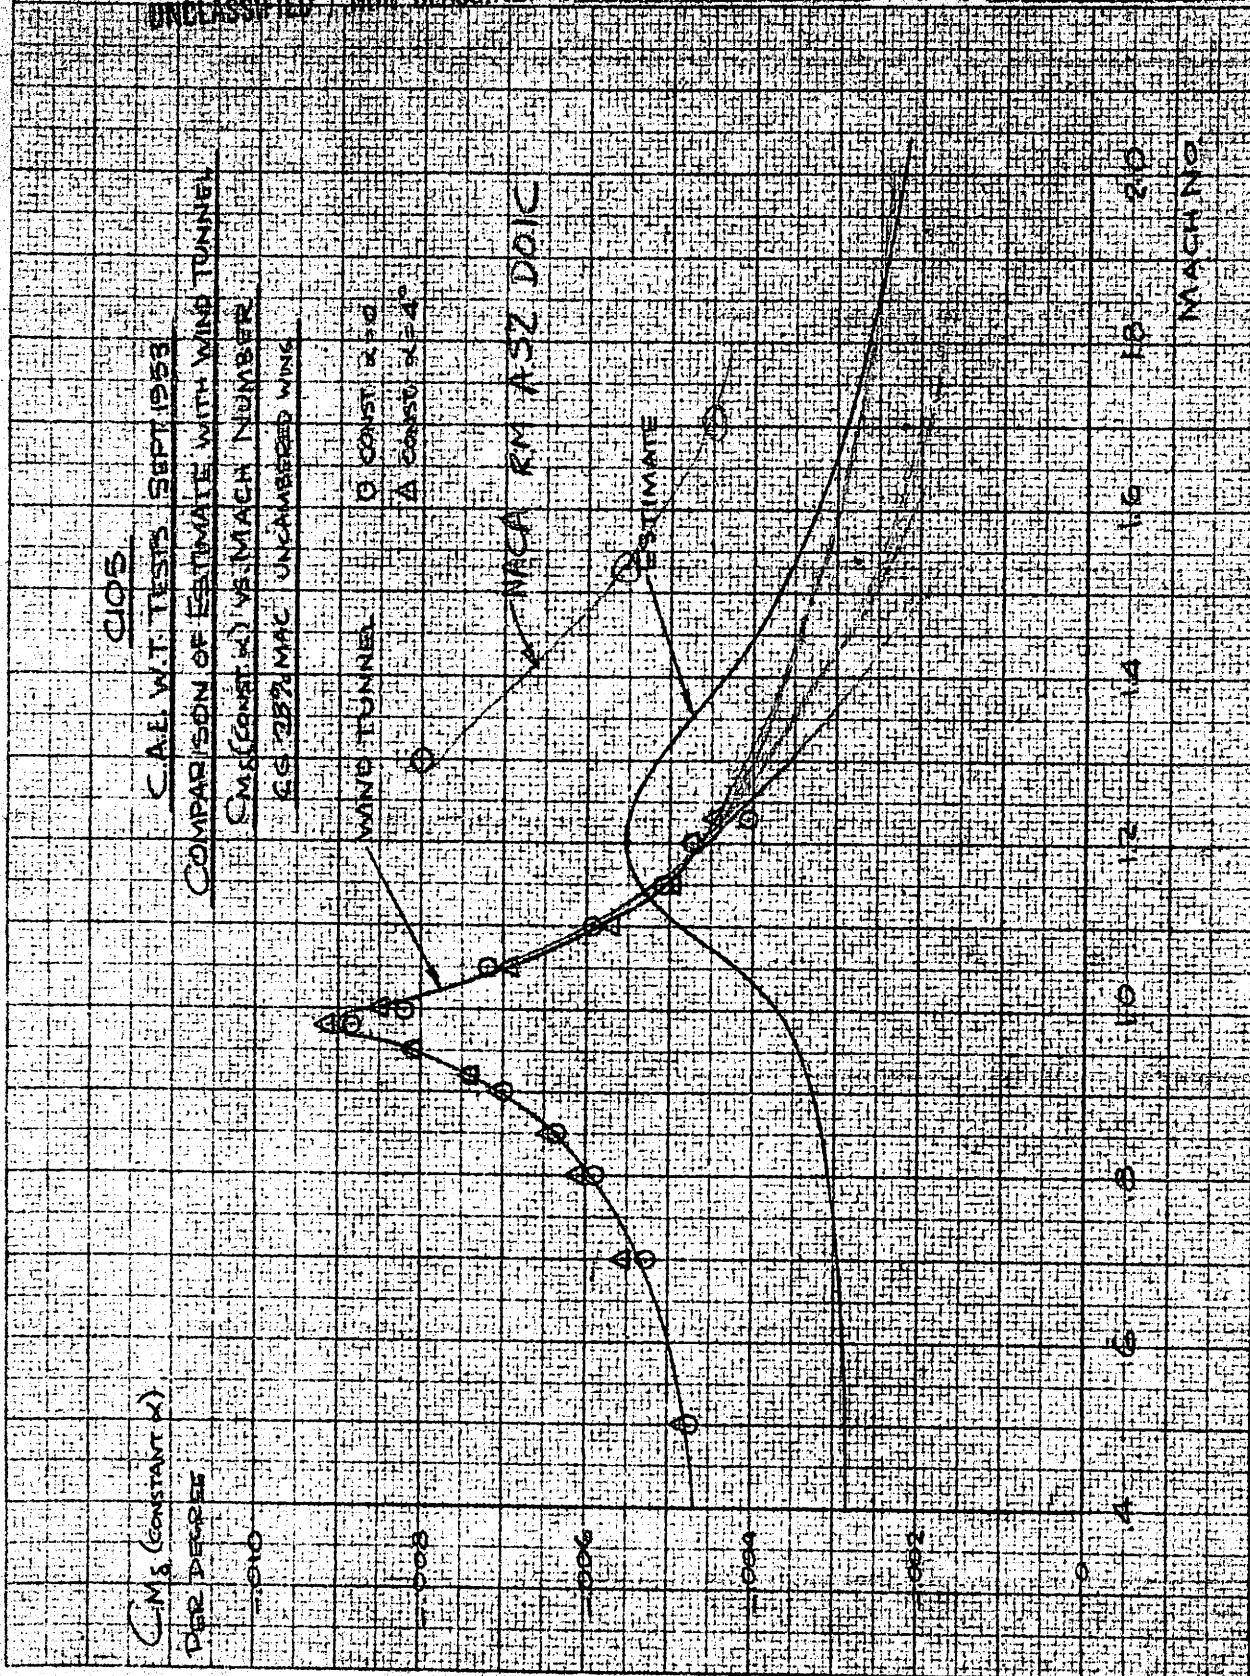

UNCLASSIFIED / NON CLASSIFIED

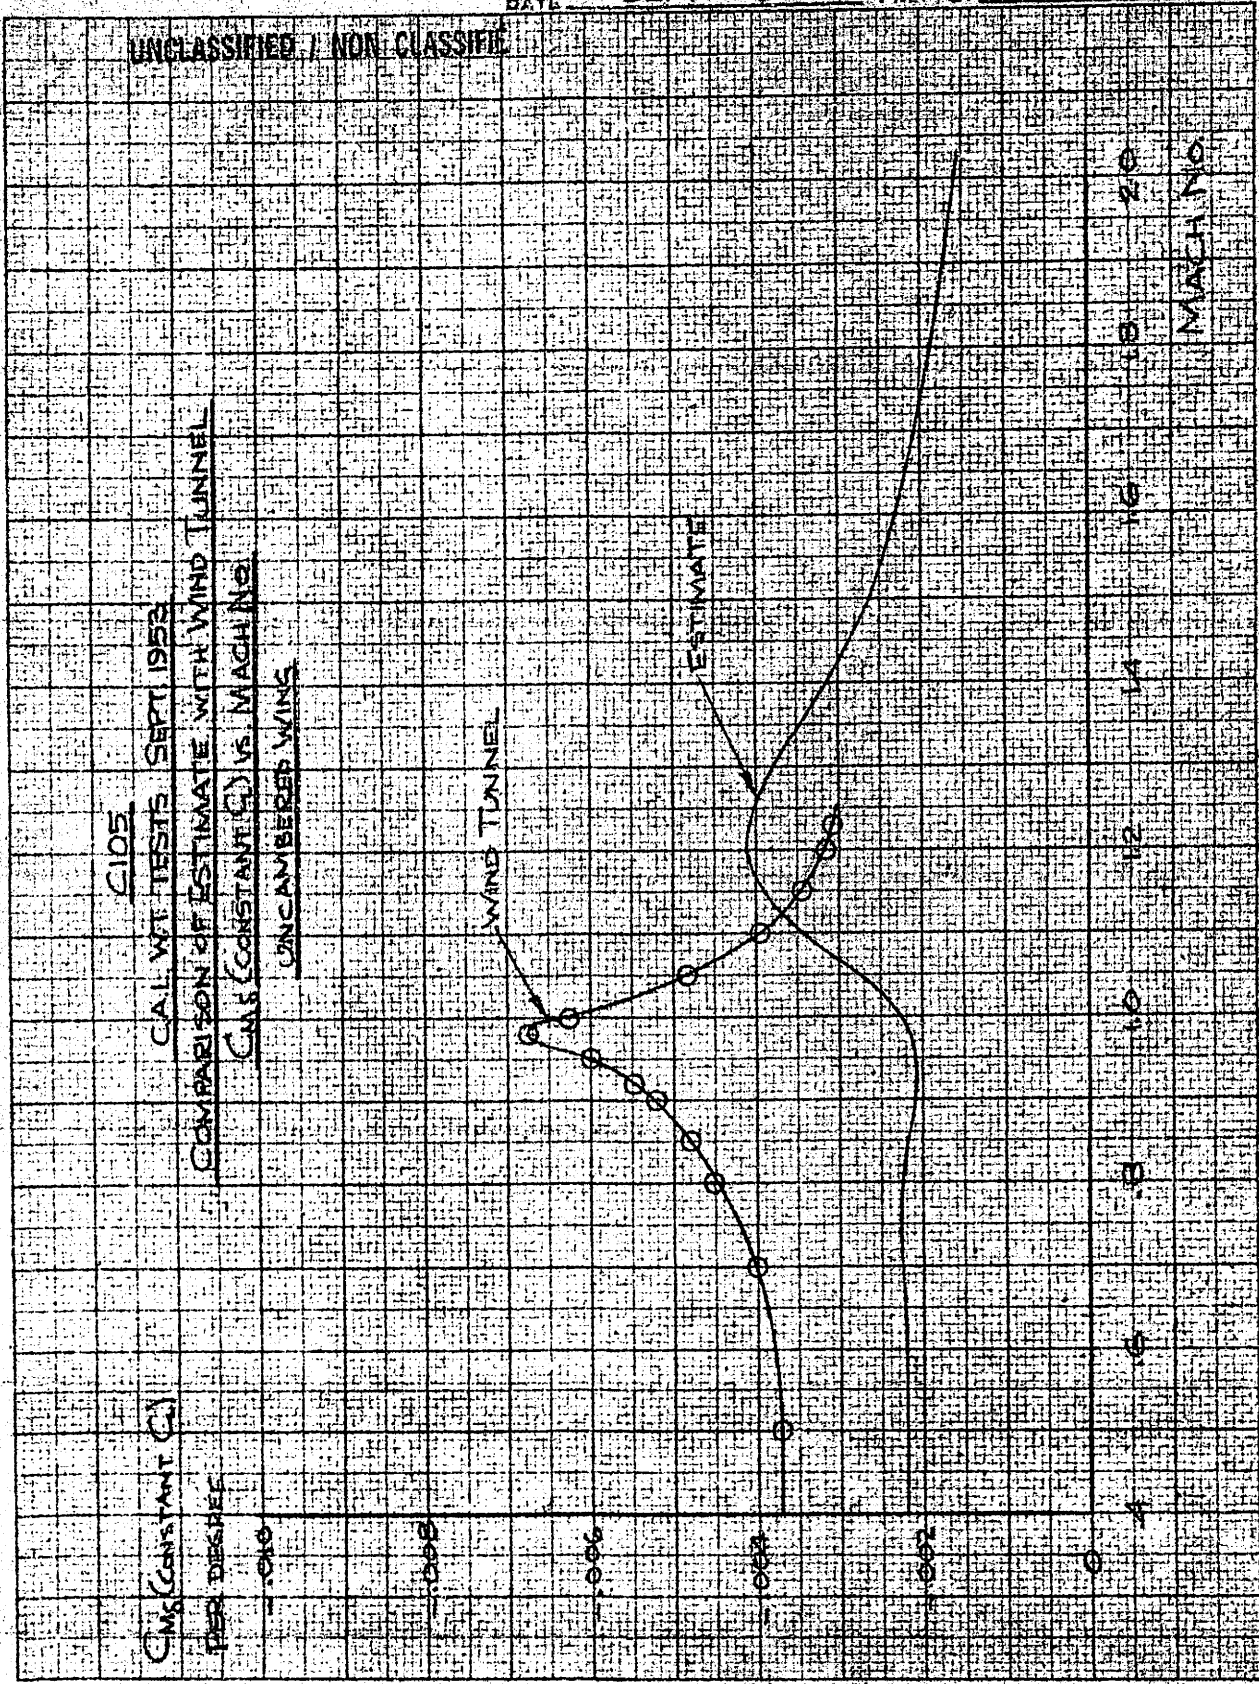

AIRCRAFT
A.U.W.

C-105

COMPONENT

SHEET NO. 3.4

REPORT NO. P/W-T/9

DATE 9 Sept. 1953

PREP BY C.A. Ford

UNCLASSIFIED / NON CLASSIFIED

Check vs Mach Number

Cornell W-T Tests c/w

Estimated Values

$0^\circ \leq \alpha \leq 6^\circ$

Configuration BCWVR
(Uncambered)

$\delta = -5^\circ$

$\delta = 0^\circ$

Check / %

-0.03

-0.02

-0.01

0

0.2

0.4

0.6

0.8

1.0

1.2

1.4


1.6

1.8

Mach Number

FORM 1748

350-12 PEUFFEL & ESSER CO.
10 x 10 to the 1/2 inch, 25 lbs. capacity.
MADE IN U.S.A.

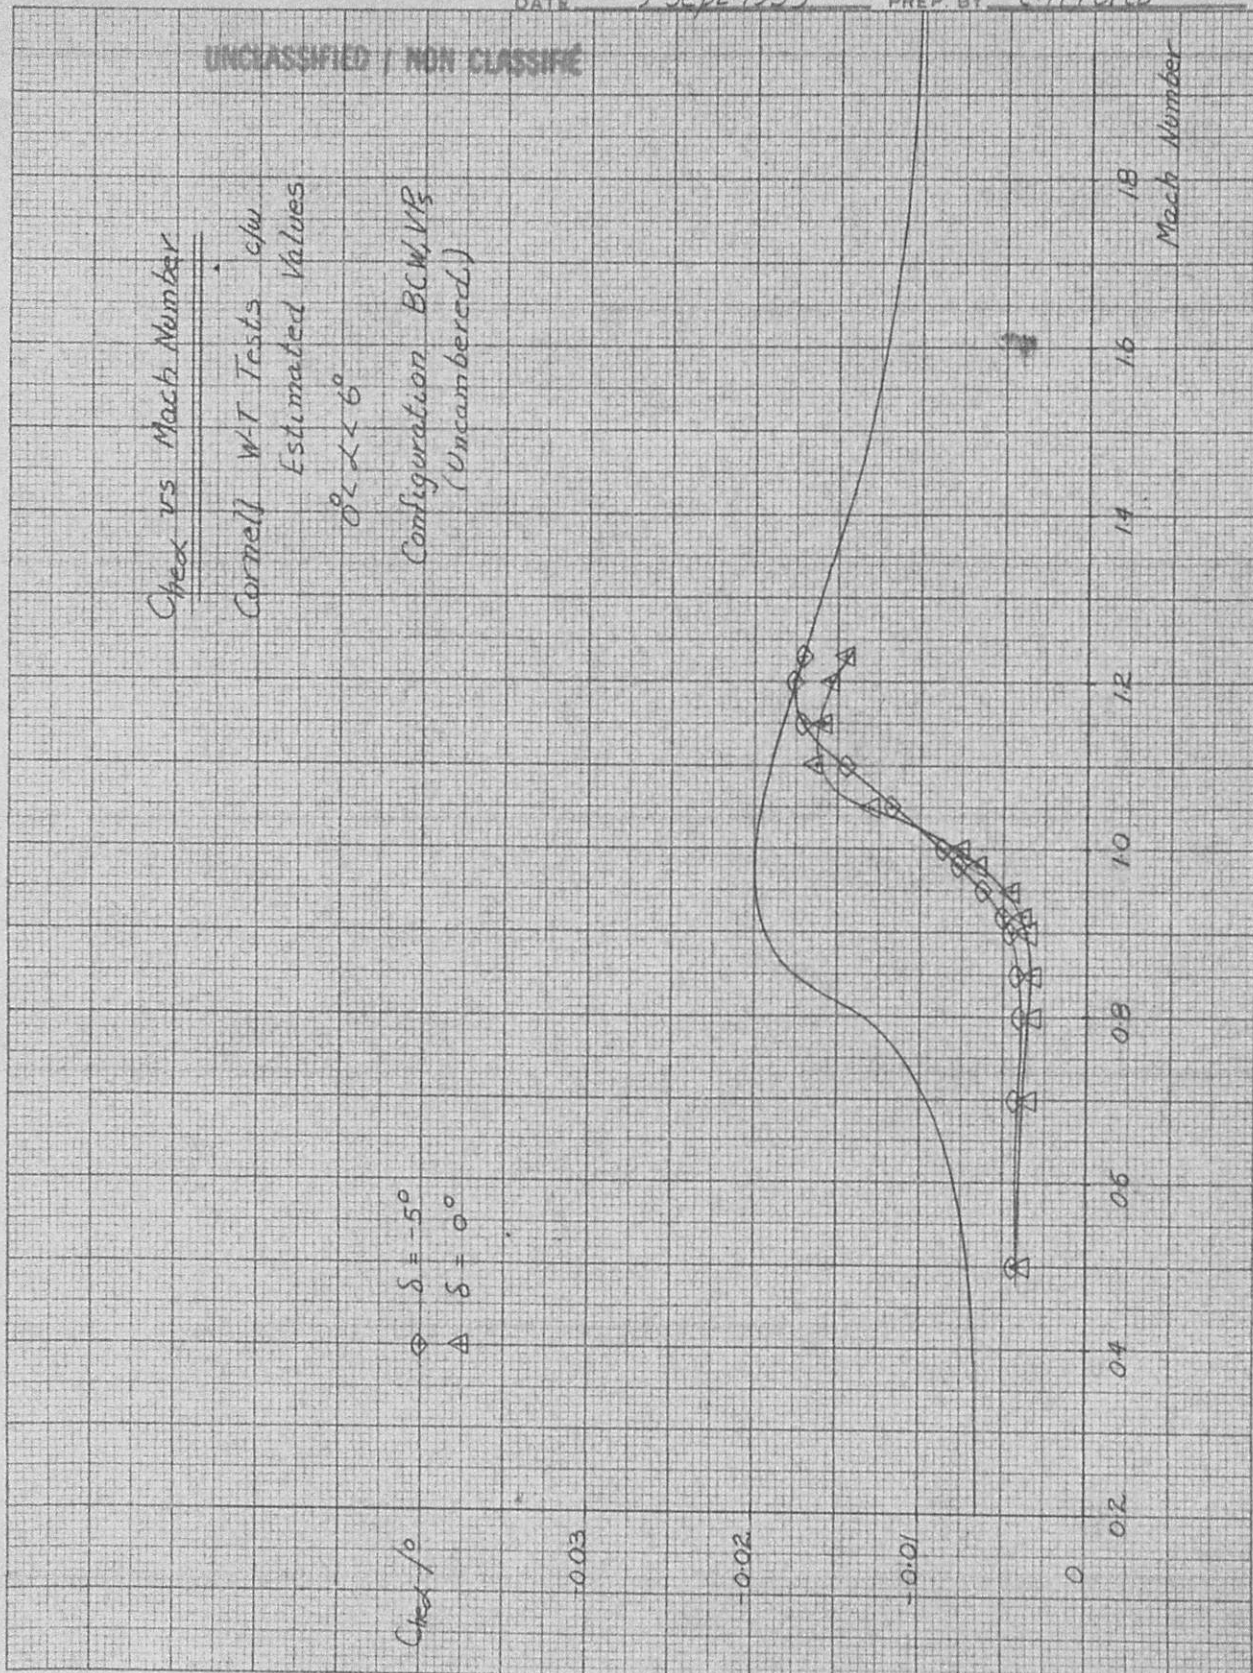

UNCLASSIFIED / NON CLASSIFIED

Ches vs Mach Number

Estimation of Cornell Tests

$\alpha = 0^\circ$
 $\alpha = 4^\circ$
 $-10^\circ \leq \delta \leq 10^\circ$

Configuration BCWVR₃
(Uncambered)

C_{hes}/ρ

-0.04

-0.03

-0.02

-0.01

0

0.2

0.4

0.6

0.8

1.0

1.2

1.4

1.6

1.8

Mach Number

Estimated
($P/\text{control } (1/\tau)$)

AIRCRAFT C105
A. U. W.

COMPONENT


SHEET No. 1-1

DATE SEPT. 1 1953

REPORT No. P/W.T. 19

PREP BY Bob. Oster

UNCLASSIFIED / NON CLASSIFIED

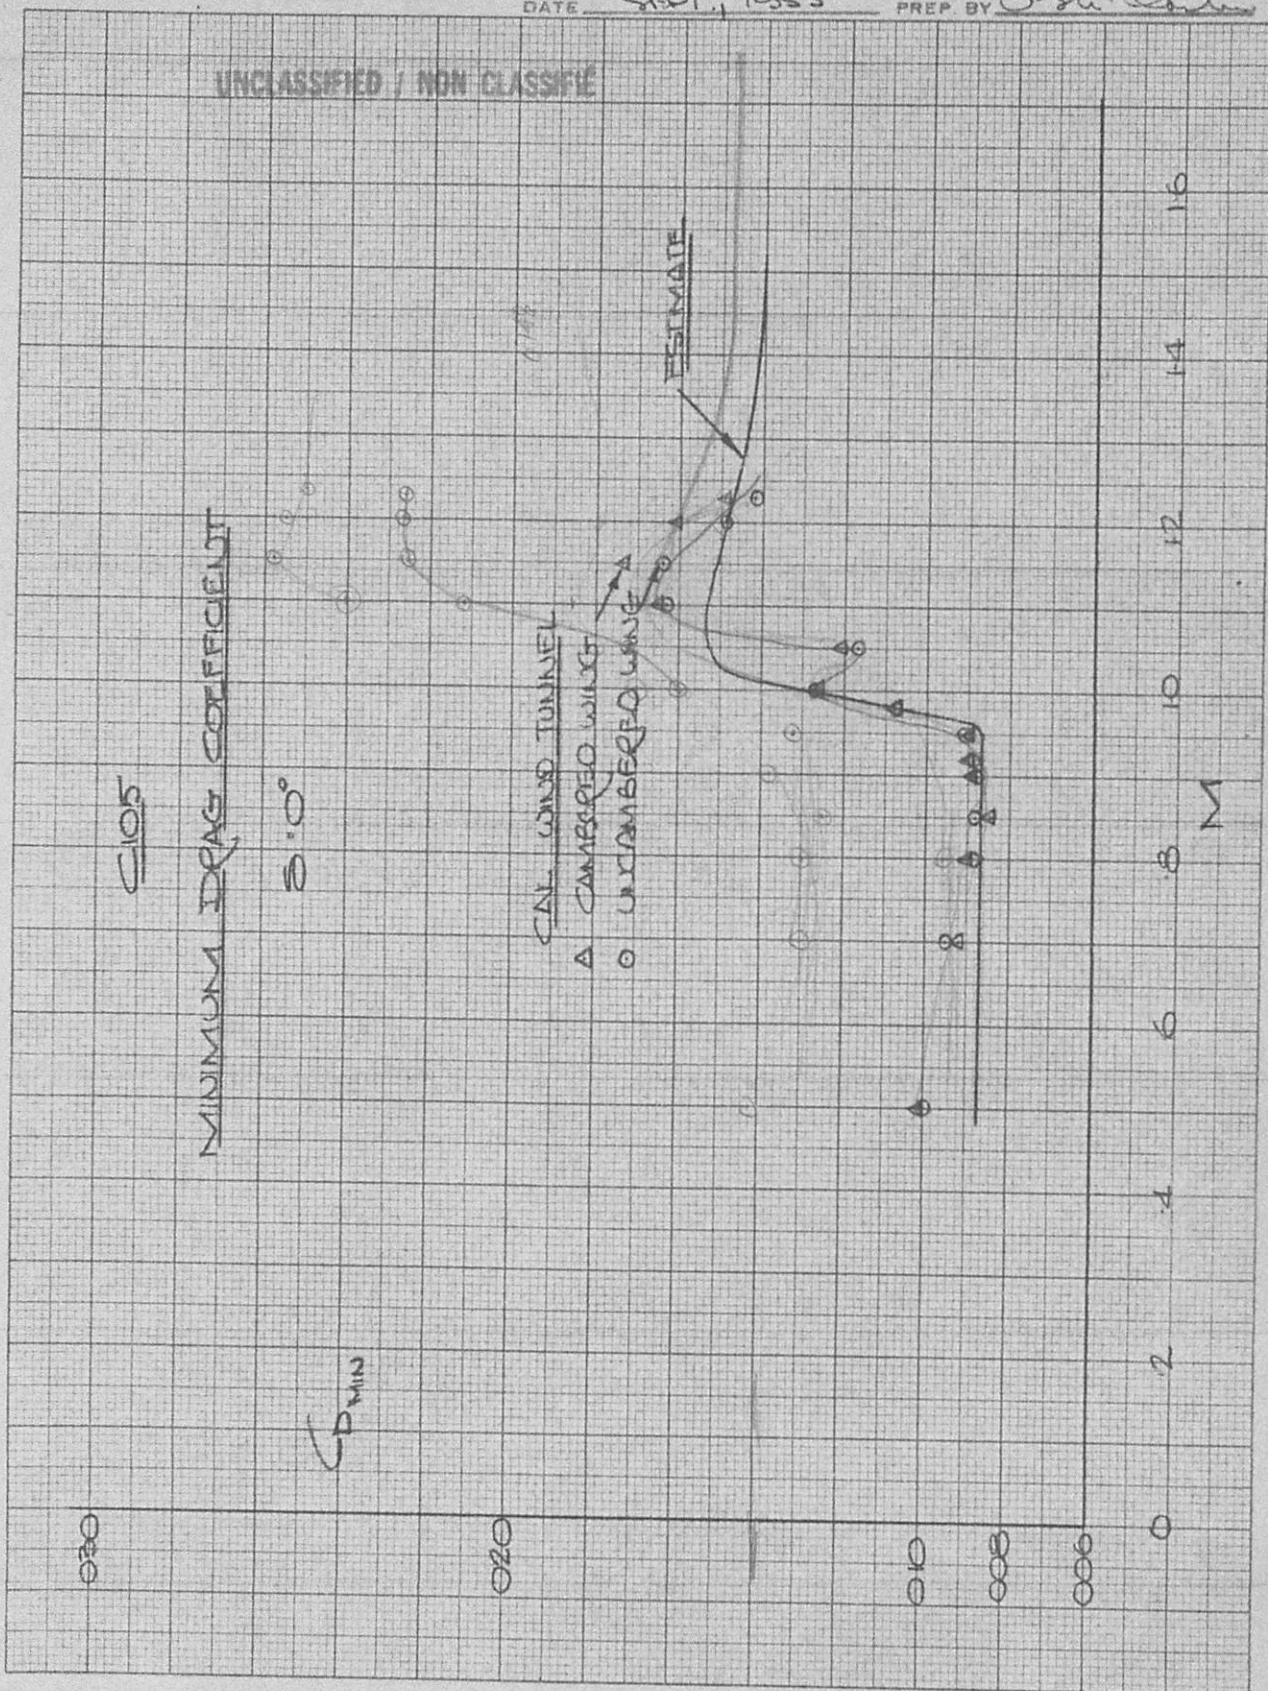

AIRCRAFT
A. U. W.

G05

COMPONENT

SHEET No. 1-2

DATE

REPORT No. PLW. 19

PREP BY

Bl. L. L.

UNCLASSIFIED / NON CLASSIFIÉ

C05

AERODYNAMIC EFFICIENCY

5.0°

CAL. WIND TUNNEL

CAMBERED WING

UNCAMBERED WING

ESTIMATE

M

0 2 4 6 8 10 12 14 16

7 6 5 4 3 2 1 0

UNCLASSIFIED / NON CLASSIFIED

EFFECT OF ELEVATOR DEFLECTION ON MINIMUM
DRAG COEFFICIENT

CL005

$$\frac{\Delta C_{D_{min}}}{C_{D_{min}}}$$

12×10^{-5}

$$\frac{\Delta C_{D_{min}}}{C_{D_{min}}}$$

CAL. WIND TUNNEL

$-20^\circ < \delta < +10^\circ$

$\delta = -30^\circ$

ESTIMATE
MISSILE DATA

ESTIMATE
WIND TUNNEL DATA

UNCLASSIFIED / NON CLASSIFIED

C105

EFFECT OF DEFLECTED ELEVATOR
ON DRAG DUE TO LIFT

14×10^{-3}

$\frac{\Delta C_D}{C_L}$

ESTIMATE
WIND TUNNEL DATA

ESTIMATE
MISSILE DATA

CAL. WIND TUNNEL

$\alpha = 0^\circ$
 $\alpha = 10^\circ$
 $\alpha = 20^\circ$
 $\alpha = 30^\circ$
 $\alpha = 40^\circ$

M

UNCLASSIFIED / NON CLASSIFIED

