



AVRO AIRCRAFT LIMITED

MALTON - ONTARIO

TECHNICAL DEPARTMENT (Aircraft)

SECRET

AIRCRAFT: ARROW 2

REPORT NO: 72/Systems 22/170

FILE NO:

NO. OF SHEETS 21

TITLE:

"ENVIRONMENTAL PROTECTION

FOR CREW MEMBERS"

PRELIMINARY

PREPARED BY *J. How - H. Lane* DATE May 1958

CHECKED BY *J. How* DATE May 1958

SUPERVISED BY DATE May 1958

APPROVED BY *Colt Marshall* DATE May '58

ISSUE NO.	REVISION NO.	REVISED BY	APPROVED BY	DATE	REMARKS



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

UNCLASSIFIED
SECRET

REPORT NO. 72/Systems 22/170

SHEET NO. 1

AIRCRAFT: ARROW 2	ENVIRONMENTAL PROTECTION FOR CREW MEMBERS	PREPARED BY	DATE
		G. Shaw	May 1958
		CHECKED BY	DATE

INDEX

SECTION	1.0 INTRODUCTION
	2.0 PROTECTIVE GEAR
	3.0 PROBLEM AREAS
	4.0 SYSTEMS
	5.0 CONCLUSION



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 72/Systems 22/170

SHEET NO. 2

AIRCRAFT:

ARROW 2

ENVIRONMENTAL
PROTECTION FOR CREW
MEMBERS

PREPARED BY

DATE

G. Shaw

May 1958

CHECKED BY

DATE

TABLES

1. Taxi Times for Aircraft 25201
2. Vent Suit Supply - Hot Day Mission
3. Comparison of Systems
4. Weights

FIGS.

1. Cockpit Pressure Schedule
2. Vent Suit Flow Characteristics
3. Temperature Distribution
4. Cockpit Temperature for Ground Supply
5. Cockpit Temperature During Taxi
6. Cockpit Temperature During Taxi with Increased Engine RPM
7. Temperature vs. Time - Extreme Mission
8. Pressure vs. Time - Extreme Mission
9. Flow vs. Time - Extreme Mission
10. Limitations on Emergency Ram Air
11. Stagnation Pressure and Temperature vs. M. No.
12. Ventilated Suit System for Ground Use
13. Pressure Available from Ground Supply
14. Ventilated Suit System for Flight and Ground Use
15. Ventilated Suit System with Emergency Provisions
16. Pressure and Ventilated Suit Supply System



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 72/Systems 22/170

SHEET NO. 3

AIRCRAFT: ARROW 2	ENVIRONMENTAL PROTECTION FOR CREW MEMBERS	PREPARED BY	DATE
		G. Shaw	May 1958
		CHECKED BY	DATE

REFERENCES

1. System Brochure Avro Report No. 72/Systems 22/48
2. Memo - 6194/16A/J
Covering the meeting between Avro and I.A.M. March 6, 1957
concerning cockpit environment.
3. Paper - SAML-129 (I.A.M.)
"Protection against heat"
4. Avro Test RT 08/745
"Cockpit environment tests"
5. Avro Report LOG/105/13 - July 1955 "Ground Environment"
6. RCAF Letters - re ground air supply S36-38-105-13
(AP01) Feb. 6/1958
S36-38-105 (AP01) Feb.28/58
7. Avro Report - "System Analysis
for IBM 704 Computer" P/Equip/92



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 72/Systems 22/170

SHEET NO. 4

AIRCRAFT:

ARROW 2

ENVIRONMENTAL
PROTECTION FOR CREW
MEMBERS

PREPARED BY

G. Shaw

DATE

May 1958

CHECKED BY

DATE

1. INTRODUCTION

1.1 Requirements for the Arrow "cockpit environment" stipulate that the temperature shall be maintained between 40 and 80°F and the pressure maintained to a schedule as shown in Figure 1.

The system selected to meet these requirements is an air cycle system utilizing air bled from both main engine compressors. 1

The system performance is dependent on engine bleed pressures and therefore, during certain flight and ground conditions where low bleed pressures occur, there will be a deterioration in system performance.

A system designed to satisfy all conditions would be unduly complex and heavy. The Arrow air conditioning system, as is any aircraft system, is a compromise between performance, complexity and weight. The problem areas resulting from this compromise are:

- (a) Cockpit cooling during standby using the support vehicle.
- (b) Cockpit cooling while taxiing.
- (c) Cockpit cooling and pressure during descent (Normal Operation)
- (d) Pressurization during zoom to high altitude.
- (e) A final problem common to any system is system failure.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 72/Systems 22/170

SHEET NO. 5

AIRCRAFT: ARROW 2	ENVIRONMENTAL PROTECTION FOR CREW MEMBERS	PREPARED BY	DATE
		G. Shaw	May 1958
		CHECKED BY	DATE

1.2 Since these problems occur with all present day military aircraft, considerable development work has been done on gear to protect the air crew from high temperature and low pressure. This gear, consisting of ventilated suits and pressure suits, does not in itself obviate the necessity of an air conditioning system for the cockpit, although it may somewhat reduce the problem. Also, the use of ventilated and/or pressurized suits in itself carries a penalty of added weight and complexity.

1.3 This report discusses the problem areas outlined above, the various types of protective gear to be considered, and the system requirements for them.

2. PROTECTIVE GEAR

2.1 The present equipment consists of

(a) the air conditioning system which controls the cockpit pressure and air temperature within the stipulated limits for normal flight.^{2.1}

(b) A pressure vest worn by the crewman and interconnected with the anti "G" suit for emergency pressure protection.

With the Std. A13A mask this gear will give 5 min. protection @ 50,000 feet. With a pressure helmet this can be extended to 5 min. at 65,000 feet.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

UNCLASSIFIED

REPORT NO. 72/Systems 22/170

SHEET NO. 6

AIRCRAFT: ARROW 2	ENVIRONMENTAL PROTECTION FOR CREW MEMBERS	PREPARED BY	DATE
		G. Shaw	May 1958
		CHECKED BY	DATE

No special gear is worn by the crew members for protection against high temperature.

2.2 Two items are under development at I.A.M. which could be fitted to the Arrow.

2.2.1 The first of these is a vent suit for protection against high temperature. The requirements for this suit are given as 13 CFM of air per minute with a pressure of 10" W.G. at the suit inlet. Since this suit works primarily on the evaporation of sweat the actual air temperature can vary over wide limits providing it is dry enough.³ Figure 2 illustrates the flow and pressure drop characteristics of this suit. The suit is currently being developed and evaluated at I.A.M.

2.2.2 The second item which is presently under development at I.A.M. is a full pressure suit. Since this suit covers the man in an impervious layer it must at all times be supplied with a ventilating air supply identical with that of the ventilated suit.

The pressure suit is normally deflated and acts as a ventilated suit. If the cabin pressure fails it will inflate and can give indefinite[?] protection to any altitude. In this case the suit requires the same air flow as above but at a pressure equivalent to the



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 72/Systems 22/170

SHEET NO. 7

AIRCRAFT:

ARROW 2

ENVIRONMENTAL
PROTECTION FOR CREW
MEMBERS

PREPARED BY

DATE

G. Shaw

May 1958

CHECKED BY

DATE

2.2.2 (Continued)
altitude desired in the suit.

3. PROBLEM AREAS

3.1 General Remarks

This section of the report covers in detail the problem areas outlined above and the limitations of the present system.

It is difficult to make a positive statement as to the severity of the problems, since we are dealing with human reactions to an environment. The physical characteristics of this environment such as time, temperature, humidity and pressure, all have to be taken into account.

In each case discussed, the following environmental data, when known, is presented:

- (a) Duration of condition (min.)
- (b) Cockpit pressure (psia)
- (c) Cockpit mass flow (#/min.)
- (d) Cockpit air temperature in and out (°F)

This data is in the main based on a theoretical system analysis.⁷ There is therefore, the possibility of a small plus or minus error.

NOTE: (a) The outlet temperature should be considered the actual air temperature in the cockpit. The air temperatures quoted are actual air temperatures not environmental temperatures.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

SECRET

REPORT NO. 72/Systems 22/170

SHEET NO. 8

AIRCRAFT: ARROW 2	ENVIRONMENTAL PROTECTION FOR CREW MEMBERS	PREPARED BY	DATE
		G. Shaw	May 1958
		CHECKED BY	DATE

3.1 (Continued)

Such things as solar radiation, radiation from wall to man, air velocity, humidity and clothing worn by the man all effect the environmental temperature to some extent.

- (b) The moisture content of the cockpit air will be the same as ambient since there is no moisture removal equipment in the system.

The study shows that the present equipment is marginal from a temperature aspect during taxi and standby on the ground and possibly following system failure during flight. From a pressure aspect the system is marginal during the zoom climb.

To evaluate the seriousness of ground conditions, the probability of the occurrence of high temperatures should be considered. Figure 3 gives this data for South Western Ontario (Centralia.) Due to the high temperature and humidity, this is considered the worst area 5 in Canada.

In order to properly evaluate borderline cases it may be necessary to simulate conditions in a controlled test. Work is in progress at Avro to investigate air flow, noise and heat transfer in the cockpit ⁴. There is also a program at I.A.M. to investigate ventilated suits.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

SECRET

REPORT NO. 72/Systems 22/170

SHEET NO. 9

AIRCRAFT:

ARROW 2

ENVIRONMENTAL
PROTECTION FOR CREW
MEMBERS

PREPARED BY

DATE

G. Shaw

May 1958

CHECKED BY

DATE

3.2 Cockpit Cooling During Standby using Support Vehicle

The original ground supply requirement was for 150 lb. of air/min. This allowed for 27.5 lb./min. to the cockpit. The requirement has since been reduced to a total of 130 lb./min. with 7.5 lb./min. allotted to the cockpit.⁶

Figure 4 illustrates the cockpit temperature (canopy closed) vs. ambient temperature for flows of 27.5 and 7.5 lb./min.

During normal maintenance work it is assumed the canopy will be open. However, if there is an operational requirement to hold an A/C on standby with the mobile support equipment, particularly if the canopy must be closed, a serious temperature problem arises, as can be seen from the chart.

3.3 Cockpit Cooling While Taxiing

Figure 5 gives the estimated cockpit temperature vs. ambient temperature for taxi conditions, (canopy closed). Table 1 covers the experience to date on Aircraft 25201. The cockpit air flow on Aircraft 25201 is approximately 15 lb./min. The expected flow in the Arrow 2 is approximately 27.5 lb./min.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORTING SYSTEMS 22/170
SHEET NO. 10

AIRCRAFT:

ARROW 2

ENVIRONMENTAL
PROTECTION FOR CREW
MEMBERS

PREPARED BY

G. Shaw

DATE

May 1958

CHECKED BY

DATE

If required to taxi with the canopy closed there is a temperature problem. However, there appears to be no reason why taxiing cannot be carried out with the canopy open.

A technique which can be used if the canopy must be closed is to stop the Aircraft and increase the engine RPM. The effect of this is shown in Figure 6.

This method may also be used to clear overheat warnings in the equipment cooling system.

3.4 Cockpit Cooling & Pressure During Descent (Normal Flight)

The air conditioning system has been designed to satisfy all conditions during normal flight.

Figures 7, 8 and 9 give the cockpit pressure, temperature and air flow plotted against time for an extreme mission.

The conditions plotted are for steady state conditions which in many cases will not be reached in actual flight.

This must be borne in mind when studying the curves.

The descent conditions do not fully meet the requirements, but are considered as transients of a short enough duration to be no problem. In any case a descent technique can be worked out to minimize the problem. One marginal condition not shown is the corner of the flight envelope covering subsonic flight @ 50,000.

This is not a realistic condition since at this point aircraft performance is very poor.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 72/Systems 22/170
SHEET NO. 11

AIRCRAFT: ARROW 2	ENVIRONMENTAL PROTECTION FOR CREW MEMBERS	PREPARED BY	DATE
		G. Shaw	May 1958
		CHECKED BY	DATE

The conditions here are:

Cockpit Temperature in - 47°F
Temperature out - 70°F
Mass Flow - 15.4 #/min.
Pressure - 5.93 psia
23,000'

These conditions are considered satisfactory.

3.5 Pressurization During Zoom to High Altitude

Using the kinetic energy of the aircraft it is possible to reach an altitude of 70,000' at M=1.65.

The steady state cockpit conditions here are:

Cockpit T in 50°F
T out 109°F
Mass Flow - 11 #/min.
Pressure - 4.89 psia - 27,500'

This flight condition can be maintained for approximately 10 sec.

The time to descend from 70,000' at M=1.65 to 65,000' is 26 sec. Minimum.

In case of cockpit pressure failure the present pressure protection is approximately 1 min. at 70,000' and 5 min. @ 65,000'. (Using pressure helmet).

3.6 System Failure

Any failure which necessitates shutting down the air conditioning system will result in aborting the mission



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 72/Systems 22/170

SHEET NO. 12

AIRCRAFT:

ARROW 2

ENVIRONMENTAL
PROTECTION FOR CREW
MEMBERS

PREPARED BY

DATE

G. Shaw

May 1958

CHECKED BY

DATE

3.6 (Continued)

since the fire control system must also be shut down.

The emergency procedure is to shut off air conditioning, reduce speed and descend to 40,000'.

An emergency ram air system is provided which will begin to operate when the stagnation temperature falls below 100°F.

The problem here is the temperature rise during deceleration from M=2.0 covering a period of approximately 3 min. It has been estimated that this temperature rise will peak at approximately 140°F. An attempt will be made to duplicate this in Avro's cockpit environment tests⁴ to establish the max. temperature in the cockpit during this transient condition.

Figure 10 illustrates the limitation of the emergency ram air system from a temperature consideration. Cockpit flow would be approximately 5#/min. @ 40,000 - cockpit unpressurized (i.e. - Pressure dump switch "on") - and 10 #/min. @ S/L.

For general information - Figure 11 gives ram air temperature vs. M. No.

4. SYSTEMS

4.1 It is the purpose of this section to outline what sub-systems would have to be added to the airframe to cater for the vent suit and the full pressure suit.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 72/Systems 22/170

SHEET NO. 13

AIRCRAFT:
ARROW 2

ENVIRONMENTAL PROTECTION
FOR CREW MEMBERS

PREPARED BY

DATE

G. Shaw

May 1958

CHECKED BY

DATE

4.1 (Continued)

These systems are discussed under the following headings:

- (1) Supply for a vent suit for ground use only.
- (2) Supply for a vent suit for use on the ground and in flight.
- (3) As above with the addition of an emergency supply to cater for system failure and to assist during taxi.
- (4) Supply for a pressure suit including an emergency supply.

Flow and pressure drop characteristics of these garments have been previously stated in sections 2.2.1 and 2.2.2. The effective cooling capacity is dependent on both temperature, humidity and flow. Data on this is scanty. For the purpose of system design a min. S/L flow of 13 CFM and a max. temperature of 80°F has been assumed.

4.2 Ventilated Suit for Ground Use Only System No. 1

4.2.1 This system is shown in Figure 12. Air is taken from the main system at the start of the equipment section and ducted to the suits via a shut-off valve operable by the crew members.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

~~UNCLASSIFIED~~ SECRET

REPORT NO. 72/Systems 22/170

SHEET NO. 14

AIRCRAFT: ARROW 2	ENVIRONMENTAL PROTECTION FOR CREW MEMBERS	PREPARED BY	DATE
		G. Shaw	May 1958
		CHECKED BY	DATE

4.2.2 With the aircraft on standby, the ground servicing unit will supply air at from 55 to 66°F, this temperature being determined by the requirements for the equipment cooling air. Pressure available will be a function of the total equipment cooling flow (see Figure 13); if this is 122.5 lb/min (ref. paragraph 3.2) the available pressure is 30" w.g. and, making allowance for ducting losses and cockpit back pressure, suit flows of 20 CFM each could be obtained. (Ref. Figure 2.)

4.3 Ventilated Suit for Ground and Flight Use (Fig. 14)
System No. 2

4.3.1 This system is similar to the previous one, but a booster fan has been added to cater for a lack of pressure under some flight conditions which result in flows less than the assumed requirements; this deficiency arises because cockpit flows are normally larger in flight (27.5 lb/min.) than during standby (7.5 lb/min.) and the suit system therefore, works against a larger back pressure.

4.3.2 Performance for the standby case is identical with that of the previous system; the booster fan is not essential under these conditions.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

SECRET

REPORT NO. 72/Systems 22/170

SHEET NO. 15

AIRCRAFT:

ARROW 2

ENVIRONMENTAL
PROTECTION FOR
CREW MEMBERS

PREPARED BY

DATE

G. Shaw

May 1958

CHECKED BY

DATE

4.3.3 Under flight conditions the temperature of the air supply to the suit will be approximately 55⁰F for most cases. Should it be considered desirable to have a higher inlet temperature, an electrical heater would be provided, having a rating of 250 W. Adequate flow rates can be maintained by suitable choice of the booster fan. The suit supply temperatures from this system have been checked for a typical hot day combat mission and the results are shown in Table 2. It will be seen that temperatures exceed the assumed limit for sea-level cases at low forward speeds.

4.3.4 The system has no provision for meeting emergency conditions such as system failure.

4.4 Ventilated Suit Supply with Emergency Provisions (Fig.15)
System No. 3

4.4.1 The deficiencies of the previous system can be largely rectified by providing a storage system of liquid nitrogen to meet the cases of excessive temperature. A thermostat located in the equipment supply line will be used to actuate a change-over valve when this temperature exceeds, say, 80°F; as soon as this temperature falls below 80°F again the suit supply will be restored to the main system.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 72/Systems 22/170

SHEET NO. 16

AIRCRAFT:

ARROW 2

ENVIRONMENTAL
PROTECTION FOR
CREW MEMBERS

PREPARED BY

G. Shaw

DATE

May 1958

CHECKED BY

DATE

4.4.2 Performance for the standby case is unaffected by this change, and remains as for the previous systems.

4.4.3 Under flight or taxi conditions the gas supplied to the ventilated suit will never exceed 80°F and will usually be around 55°F. The capacity of the liquid storage is determined primarily by the requirements of the taxi condition and it is proposed to allow for 15 minutes taxi, plus 5 minutes use in flight to cover transient temperature peaks during deceleration. This gives a minimum requirement of 40 lb. of nitrogen.

4.4.4 This system will give protection during deceleration after system failure.

4.5 Air Supply for Pressure and Ventilating Suit (Fig.16)
System No. 4

4.5.1 None of the system so far described could provide the pressure needed for a full pressure suit as they all draw air from the low pressure side of the expansion turbine. To ensure an adequate supply pressure the system now under discussion takes air from the high pressure side of the expansion turbine, between the turbine and water evaporator.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 72/Systems 22/170

SHEET NO. 17

AIRCRAFT:

ARROW 2

ENVIRONMENTAL
PROTECTION FOR
CREW MEMBERS

PREPARED BY

DATE

G. Shaw

May 1958

CHECKED BY

DATE

4.5.1 (Continued)

Air from this source is considerably hotter than it would be from downstream of the turbine, ranging up to 215°F and for this reason a cooler is included, using equipment air as a cooling fluid.

Also because of the higher supply pressures involved it is necessary to include a flow control unit; the booster fan, can, of course, be eliminated. As before liquid nitrogen storage is provided for emergency conditions, but a separate line from the ground service main system supply will be required; the heater can be provided if necessary.

4.5.2 Performance for the standby condition is essentially unaltered in comparison with any of the previous systems.

4.5.3 An estimate of the temperatures and pressures available at the inlet to the flow controller has been made for a typical hot day combat mission and the results are summarized in Table. 2. The nitrogen supply would be used for the sea-level low speed cases where temperatures are excessive.

4.5.4 This system provides crew protection for several emergency conditions.

In the event of the main system being shut down, pressure is still available for the suits since their air supply is taken from upstream of the shut off valve.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

UNCLASSIFIED

REPORT NO. 72/Systems 22/170

SHEET NO. 18

AIRCRAFT:	ENVIRONMENTAL PROTECTION FOR CREW MEMBERS	PREPARED BY	DATE
ARROW 2		G. Shaw	May 1958
		CHECKED BY	DATE

4.5.4 (Continued)

The equipment flow is not available for cooling, but, because of the greatly increased efficiency of the main system heat exchanger, which uses ram air, air temperatures to the suits will be very close to ram air temperatures. (See Table 2.) It is envisaged that in the event of the main system being shut down the aircraft will immediately head for base at subsonic speed and ram temperatures will then not exceed 30°F during this cruise. During deceleration prior to reaching the cruise condition the nitrogen system will be used.

Should there be a simultaneous flame out of both engines, as could occur at high altitude, cockpit pressure and system pressure would both be lost and the pressure suit would be supplied from the nitrogen system. For this purpose a pressure switch is incorporated in the system (Figure 16) so that the supply is automatically maintained. If cockpit pressure is lost due to excessive leakage the pressure suit supply will function essentially as for normal flight conditions, even though the cockpit flow is shut off.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

SECRET

REPORT NO. 72/Systems 22/170

SHEET NO. 19

AIRCRAFT: ARROW 2	ENVIRONMENTAL PROTECTION FOR CREW MEMBERS	PREPARED BY	DATE
		G. Shaw	May 1958
		CHECKED BY	DATE

5. CONCLUSION

From the study on problem areas it is seen that additional protection is required for standby with the ground vehicle. There are other areas where the system is marginal, i.e. taxi, deceleration after system failure and descent after loss of cockpit pressure. Table 3 is a comparison of systems studied to cover the ground standby case and the marginal cases. Table 4 gives the weight penalty involved in these systems. If there is a requirement for holding the Aircraft on standby it is recommended that system No.2 be used since it will help the taxi case.

If a decision is made for more complete protection, system No. 4 is recommended since the weight and complexity is very little greater than No. 3 and the protection offered much greater.

There are a number of technical points which should be cleared up before a decision is made.

- (a) The limiting range of suit supply air temperature pressure and humidity. (Ref. Section 4.1)
- (b) Peak temperatures that can be reached during deceleration from $M=2.0$ with main system failed (Ref. Section 2.6)



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

SECRET

REPORT NO. 72/Systems 22/170

SHEET NO.

AIRCRAFT: ARROW 2	ENVIRONMENTAL PROTECTION FOR CREW MEMBERS	PREPARED BY	DATE
		G. Shaw	May 1958
		CHECKED BY	DATE

Table 1 - Taxi times Aircraft 25201

Time from engine start to take off in min.

Flight No.	1	-	43
	2	-	29
	3	-	20
	4	-	16
	5	-	7
	x6	-	23
	7	-	37
	8	-	18
	9	-	8

22.3 min. Average

Notes:

(a) x Pilot commented on high temperature in cockpit

Date April 18, 1958

Time 1 P.M.

Conditions Clear, Ambient temperature approximately
70°F.

A decision was made after flight No. 6 to taxi with canopy open if temperatures were high. Previous to this the canopy had been closed before engine starting.

(b) This flying involved operation from a commercial airport with a prototype aircraft. Service flying should involve shorter taxi times.

ARROW 2 - A.R. CONDITIONING.

REPORT NO 72/SYSTEMS 22/170

SECRET

PERFORMANCE OF AIR SUPPLY SYSTEMS FOR PRESSURE x VENTILATED SUITS.

TABLE 2

TYPICAL COMBAT MISSION.

U.S.A.F. STANDARD HOT DAY

FLIGHT CONDITION	TAXI	START OF TAKE- OFF	START OF CLIMB	CLIMB	CLIMB	SUPER- SONIC CRUISE	COMBAT	START OF DESCENT	SUB- SONIC CRUISE	DESCENT	END OF DESCENT	CIRCUIT.	TOUCH- DOWN.
HEIGHT (FT.)	S.L.	S.L.	S.L.	30,000	30,000	50,000	60,000	60,000	40,000	40,000	S.L.	S.L.	S.L.
MACH NO.	0	0	0.92	0.92	1.50	1.50	1.92	1.92	0.92	0.92	0.40	0.40	0.17
AMBIENT TEMP. (°F)	103	103	103	-16	-16	-39	-24	-24	-44	-44	103	103	103

SYSTEM #2 : VENTILATED SUIT WITHOUT EMERGENCY PROVISION

COCKPIT ALTITUDE (FT.)	S.L.	S.L.	S.L.	18,300	18,300	23,000	25,700	25,700	21,100	23,100	S.L.	S.L.	AS.L.
FLOW AVAILABLE WITHOUT BOOSTER FAN (C.F.M./SUIT)	9.1	10.9	11.4	16.6	16.6	19.8	24.8	0	20.7	0	11.6	11.4	9.5
MINIMUM TEMPERATURE AVAILABLE FOR SUIT (°F)	94	66	54	56	56	56	54	56	52	56	73	53	90

SYSTEM #4 : PRESSURE x VENTILATED SUIT. - NORMAL FLIGHT

TEMP. AVAILABLE FROM MAIN SYSTEM (°F)	99	76	83	70	82	76	74	76	73	53	86	69	95
PRESSURE AVAILABLE FROM MAIN SYSTEM (PSIG.)	4.2	58.3	58.0	43.4	55.1	28.3	21.7	8.5	19.0	5.6	12.4	20.7	4.6

SYSTEM #4 : MAIN SYSTEM SHUT-OFF VALVE CLOSED

TEMPERATURE AVAILABLE FROM MAIN SYSTEM (°F)	103	103	194	57	183	151	152	152	26	26	121	121	106
--	-----	-----	-----	----	-----	-----	-----	-----	----	----	-----	-----	-----

ARROW 2. AIR-CONDITIONING.

REPORT N° 72/SYSTEMS 22/170

AIR SUPPLY FOR PRESSURE x VENTILATED SUITS.

TABLE 3.

UNCLASSIFIED

COMPARISON OF SUB-SYSTEMS.

AIRCRAFT OPERATING CONDITION	STANDBY. USING GROUND SUPPORT VEHICLE. CANOPY CLOSED.	TAXI	SYSTEM FAILURE x SHUT-OFF. DECELERATION FROM $M_N = 2.0$.	LOSS OF COCKPIT PRESSURE	
PRESENT SYSTEM.	NOT SATISFACTORY FOR HIGH AMBIENT TEMPS.	NOT SATISFACTORY FOR AMBIENT TEMP. ABOVE 65°F WITH CANOPY CLOSED.	MARGINAL.	PROTECTION FOR 1 MIN. AT 70,000' 5 MIN. AT 65,000'	
SYSTEM #1 VENT. SUIT. FOR GROUND USE ONLY	COMPLETE PROTECTION.	AS ABOVE	AS ABOVE	AS ABOVE	
SYSTEM #2 VENT SUIT FOR GROUND x FLIGHT USE.	COMPLETE PROTECTION.	MARGINAL.	AS ABOVE	AS ABOVE.	
SYSTEM #3. AS FOR #2, WITH AN EMERGENCY GAS SUPPLY.	COMPLETE PROTECTION.	COMPLETE PROTECTION. EMERGENCY SUPPLY USED.	COMPLETE PROTECTION. EMERGENCY SUPPLY USED.	AS ABOVE	
SYSTEM #4. FULL PRESSURE x VENT. SUIT.	COMPLETE PROTECTION.	COMPLETE PROTECTION. EMERGENCY SUPPLY USED.	COMPLETE PROTECTION. EM. SUPPLY USED DURING DECELERATION. A/C. SYSTEM FOR CRUISE HOME.	COMPLETE PROTECTION. EM. SUPPLY FOR DESCENT FROM 70,000'. A/C SYSTEM FOR CRUISE HOME.	

UNCLASSIFIED



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 72/Systems 22/170

SHEET NO. _____

AIRCRAFT: ARROW 2	ENVIRONMENTAL PROTECTION FOR CREW MEMBERS	PREPARED BY	DATE
		G. Shaw	May 1958
		CHECKED BY	DATE


TABLE 4SYSTEM WEIGHT ANALYSIS

SYSTEM	1	2	3	4
Ducting	3.0	3.0	3.0	5.0
Mtg. brackets	2.0	2.0	2.0	2.0
Shut-off valve	0.5	0.5	0.5	0.5
Booster fan	-	3.0	3.0	-
Heater	-	1.5	1.5	1.5
Heater Controls	-	2.0	2.0	2.0
Liquid Nitrogen	-	-	40.0	40.0
Nitrogen storage	-	-	40.0	40.0
Change-over valve	-	-	1.0	1.0
Emerg. Controls	-	-	1.0	1.0
Flow controller	-	-	-	2.5
Heat exchanger	-	-	-	4.0
Check valve	-	-	-	0.5
Totals (lb.)	5.5	12.0	94.0	100.0

Note: The weights of the suits themselves are not included in these totals.


UNCLASSIFIED

SECRET

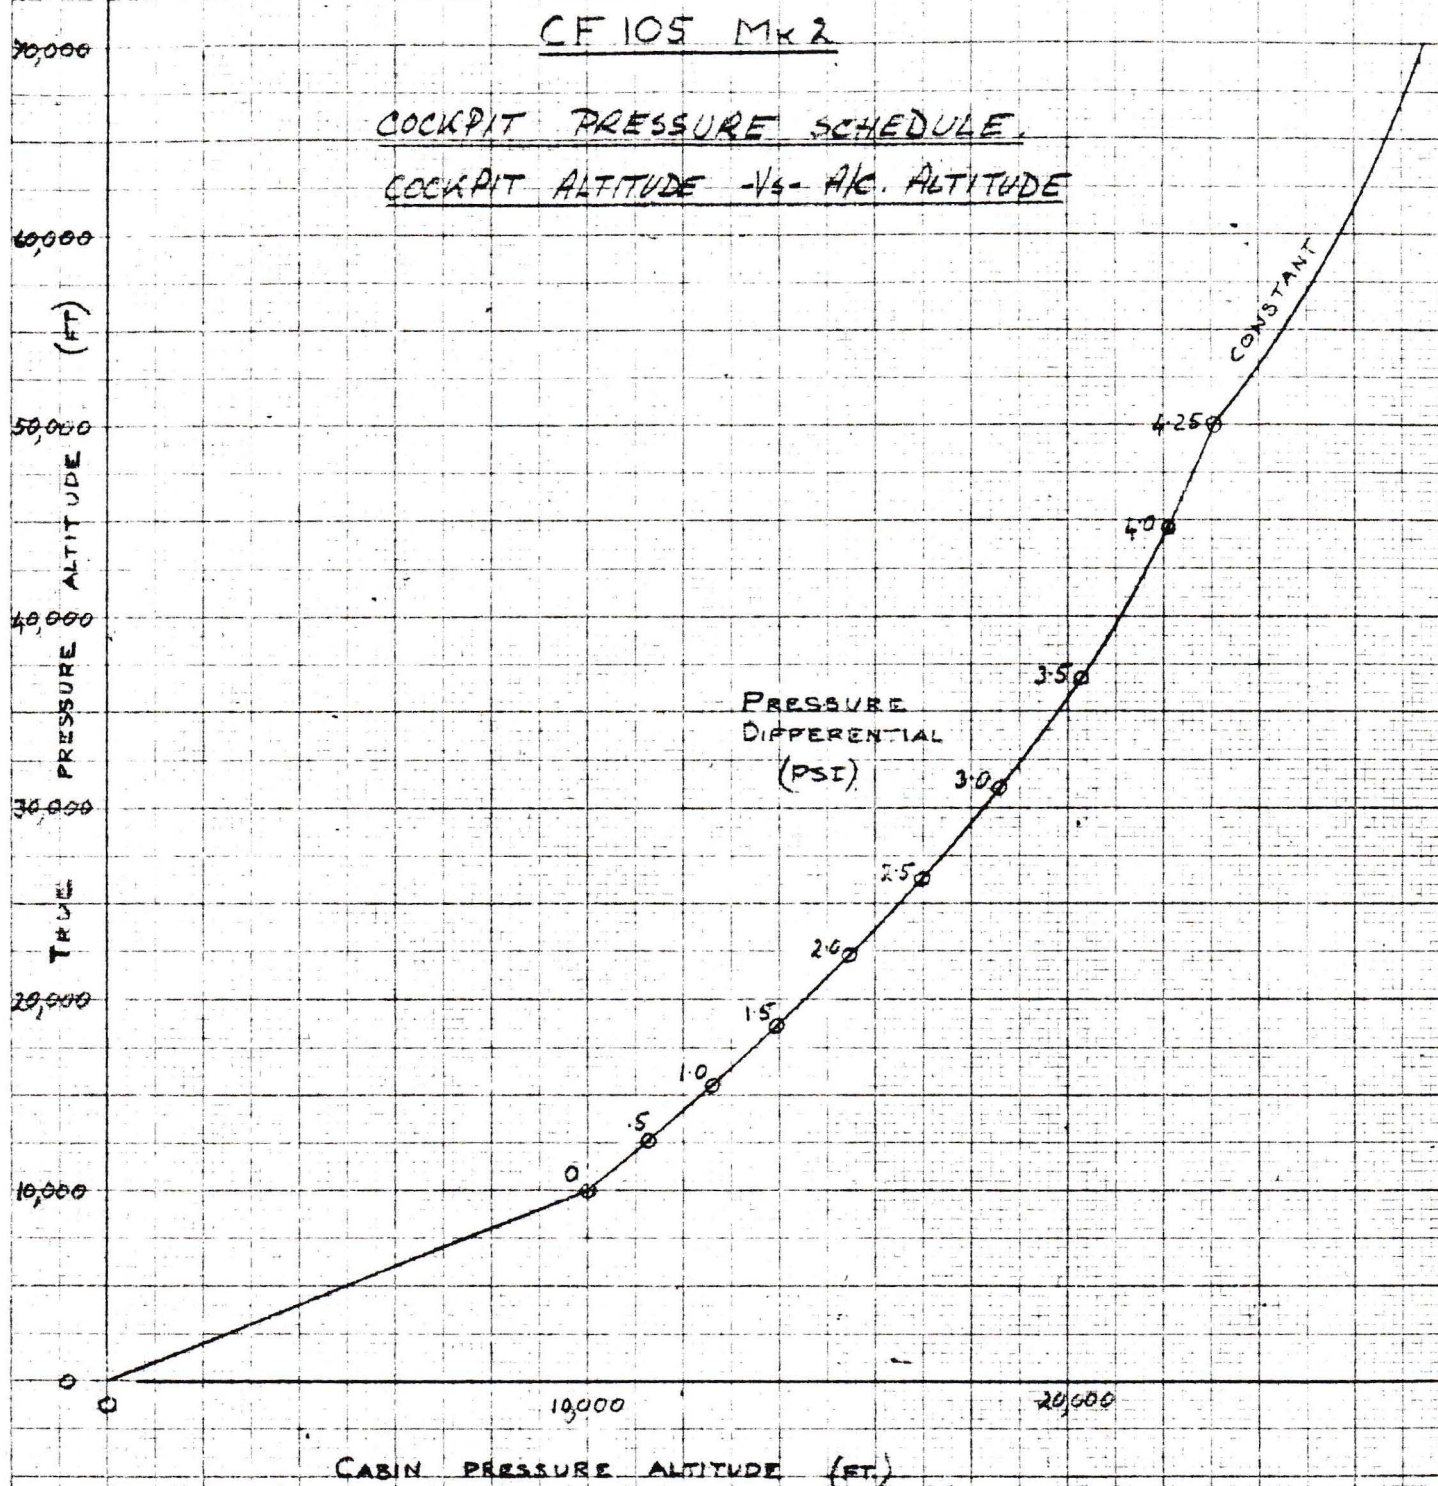

VENTILATED SUITASSUMED FLOW CHARACTERISTICS**UNCLASSIFIED**

(BASED ON A PRESSURE DROP OF 10" W.G. FOR
A FLOW OF 13 C.F.M. AT 60°F AT S.L.)

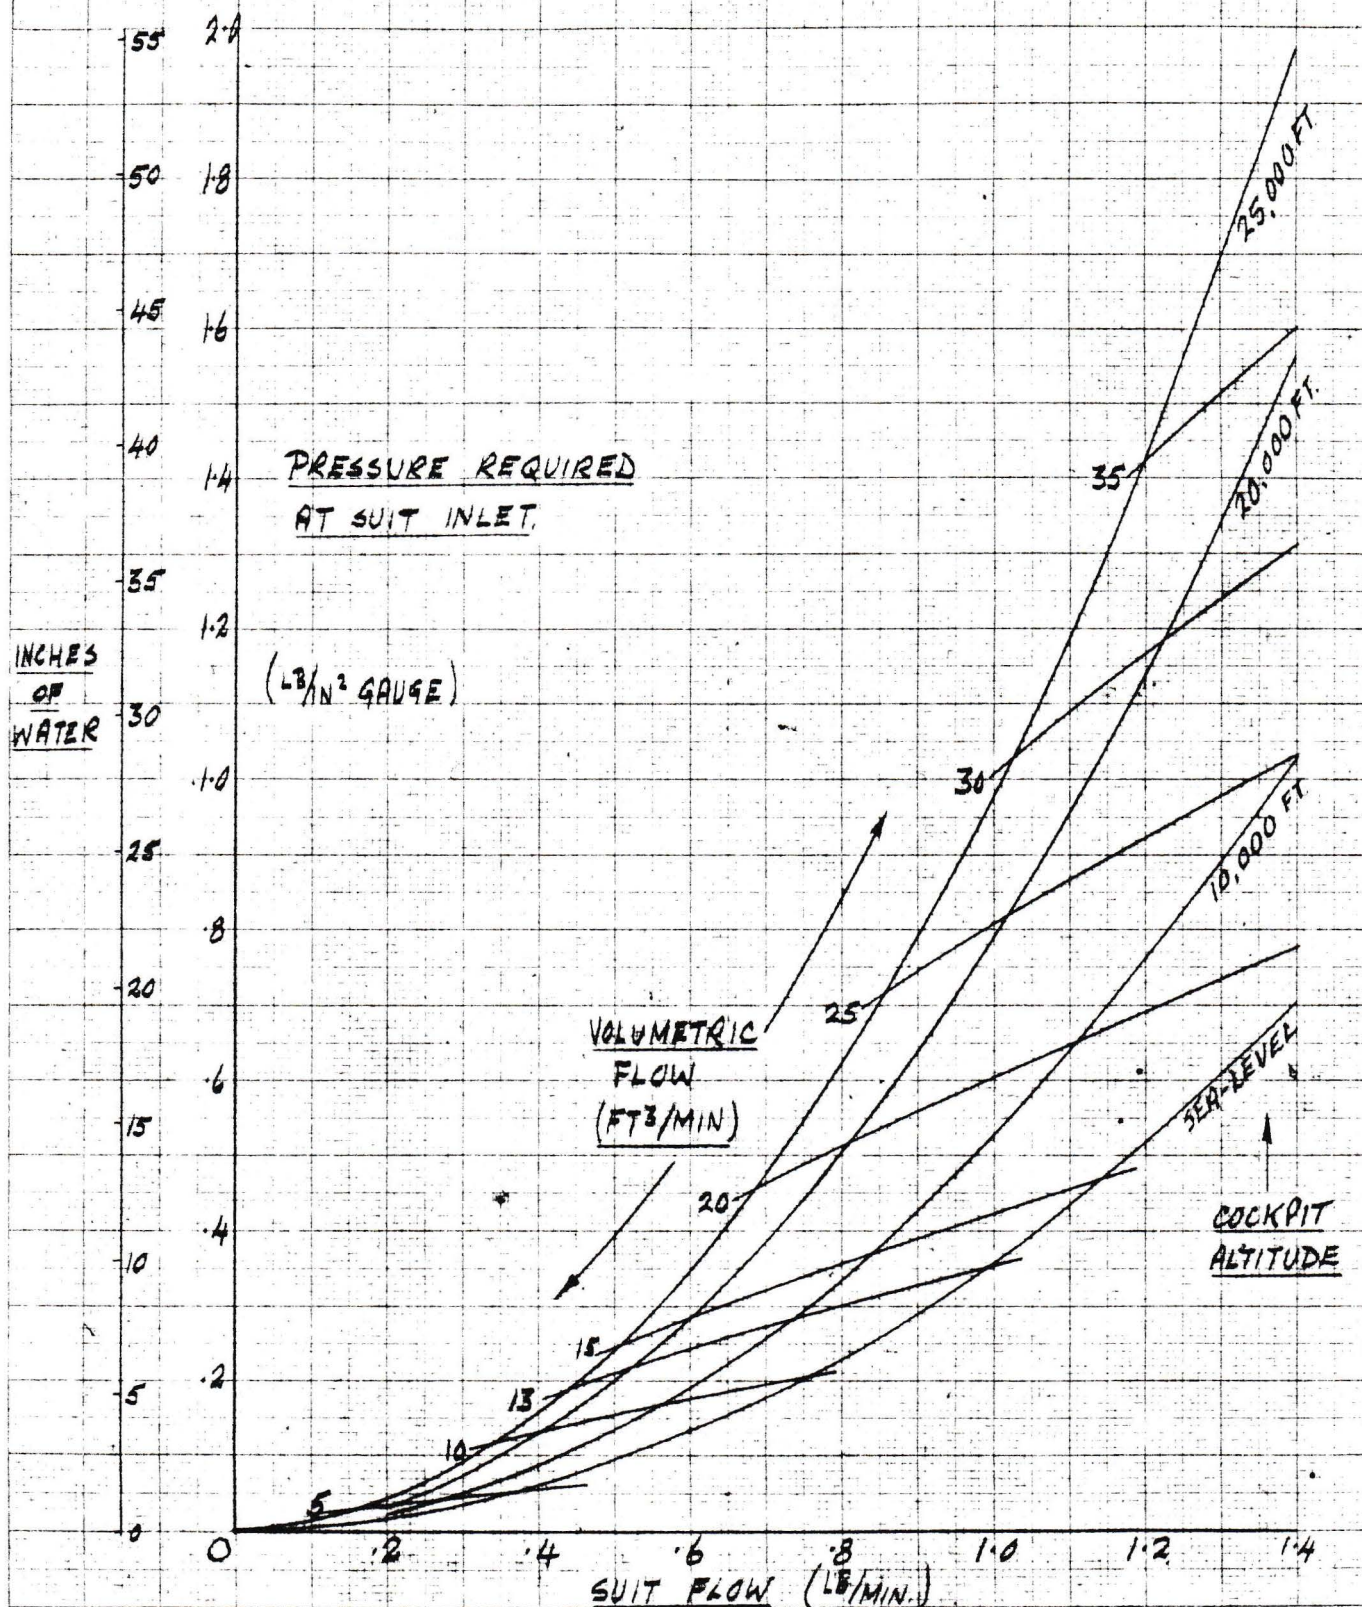


A. G. LOWE,
APRIL '58

UNCLASSIFIED
SECRET

REPORT N° 72/SYSTEMS 22/170

FIG. 3

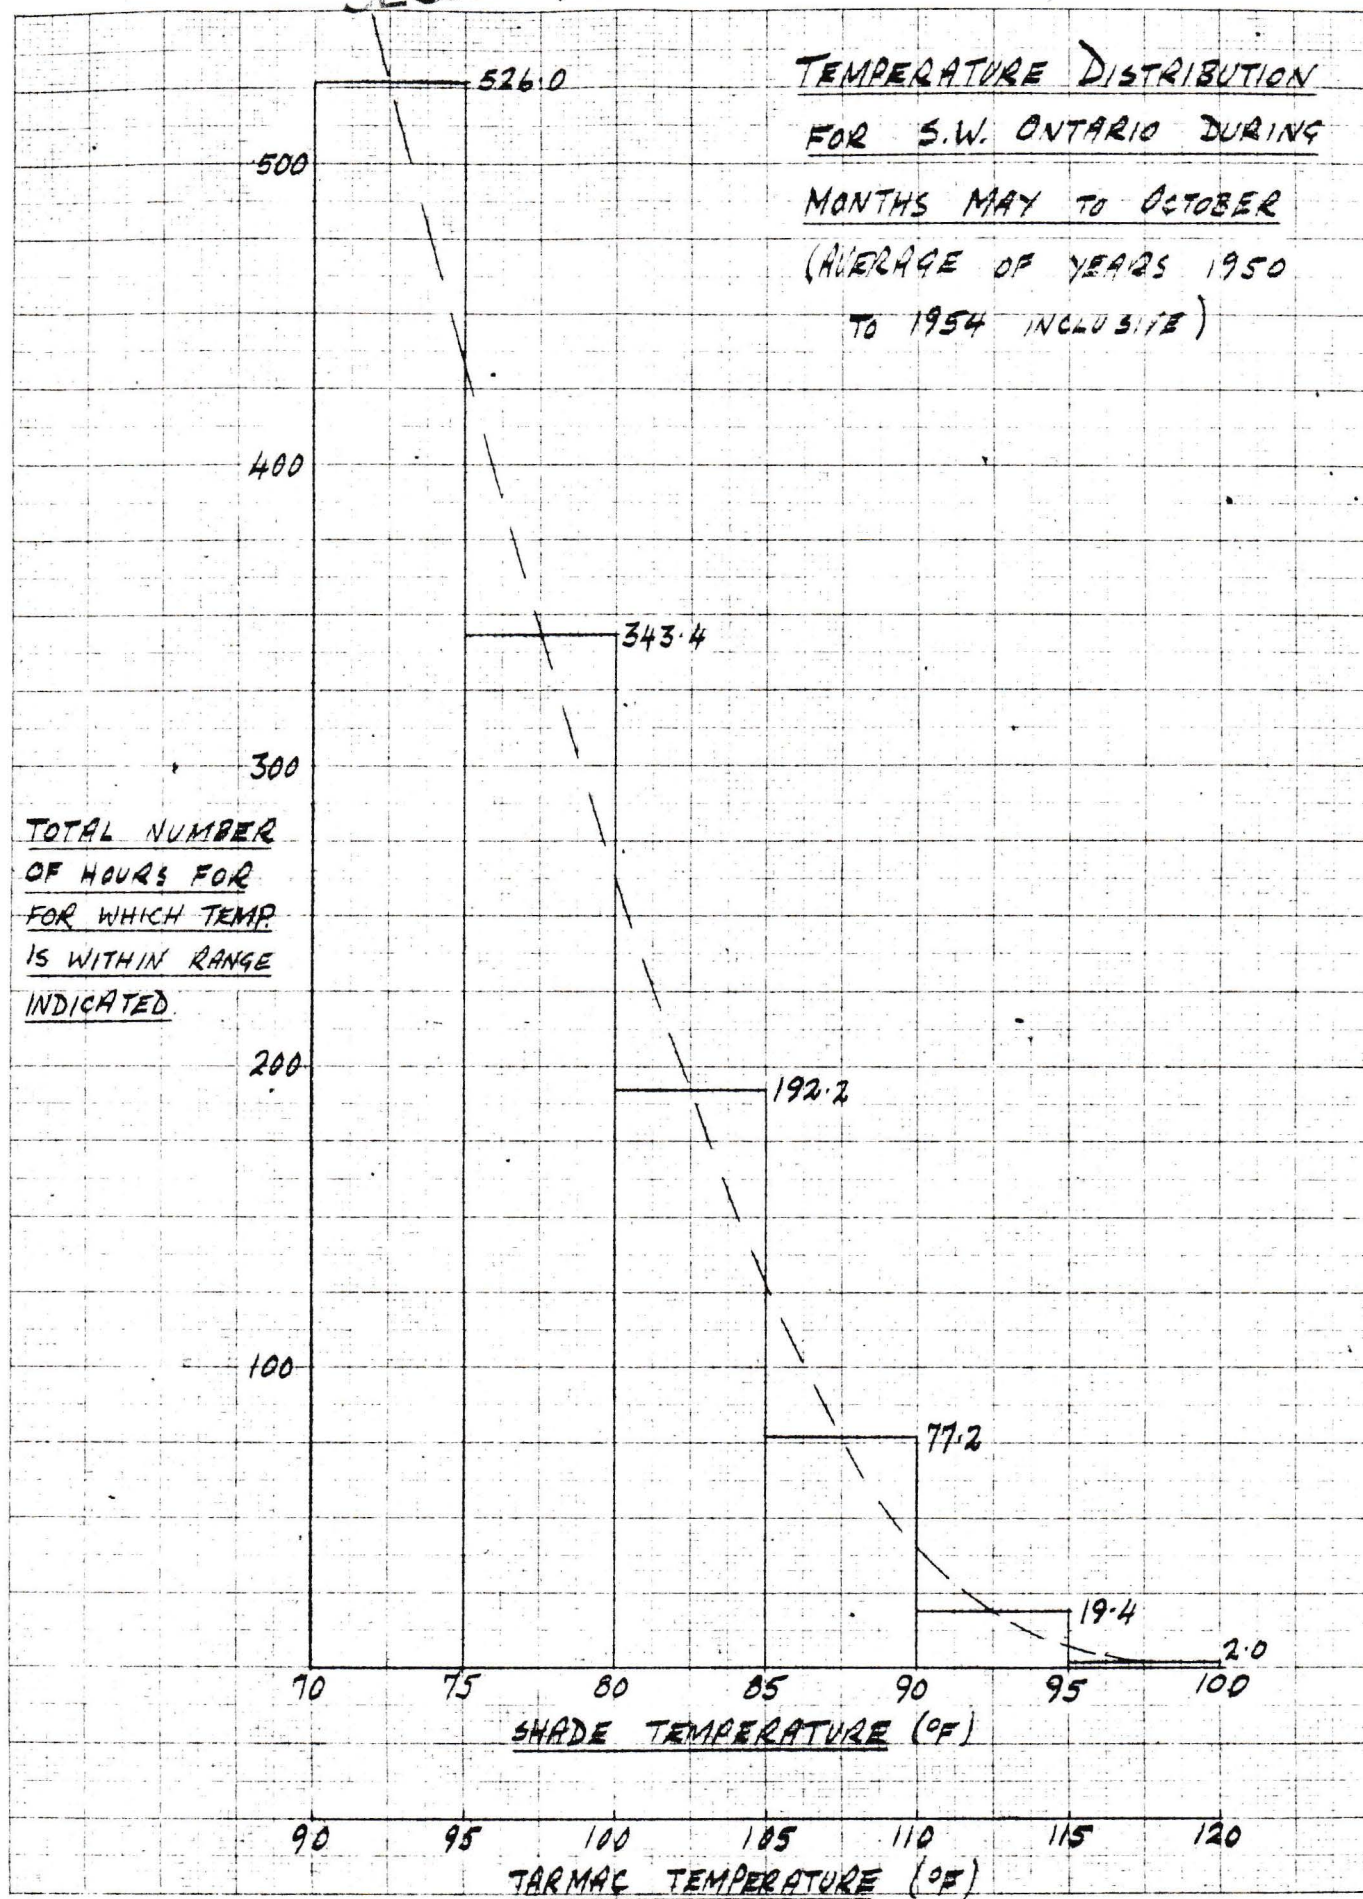

UNCLASSIFIED

SECRET

REPORT Nº 72/SYSTEMS 22/170

FIG. 4

ARROW 2 - AIR-CONDITIONING

VARIATION OF COCKPIT TEMPERATURE

WITH AMBIENT TEMPERATURE

STANDBY CONDITION - CANOPY CLOSED

INLET TEMPERATURE - 66 °F

7.5 LB/MIN.


COCKPIT FLOW

OUTLET
TEMP.
(°F)


27.5 LB/MIN.


COCKPIT FLOW

AMBIENT TEMPERATURE (°F)

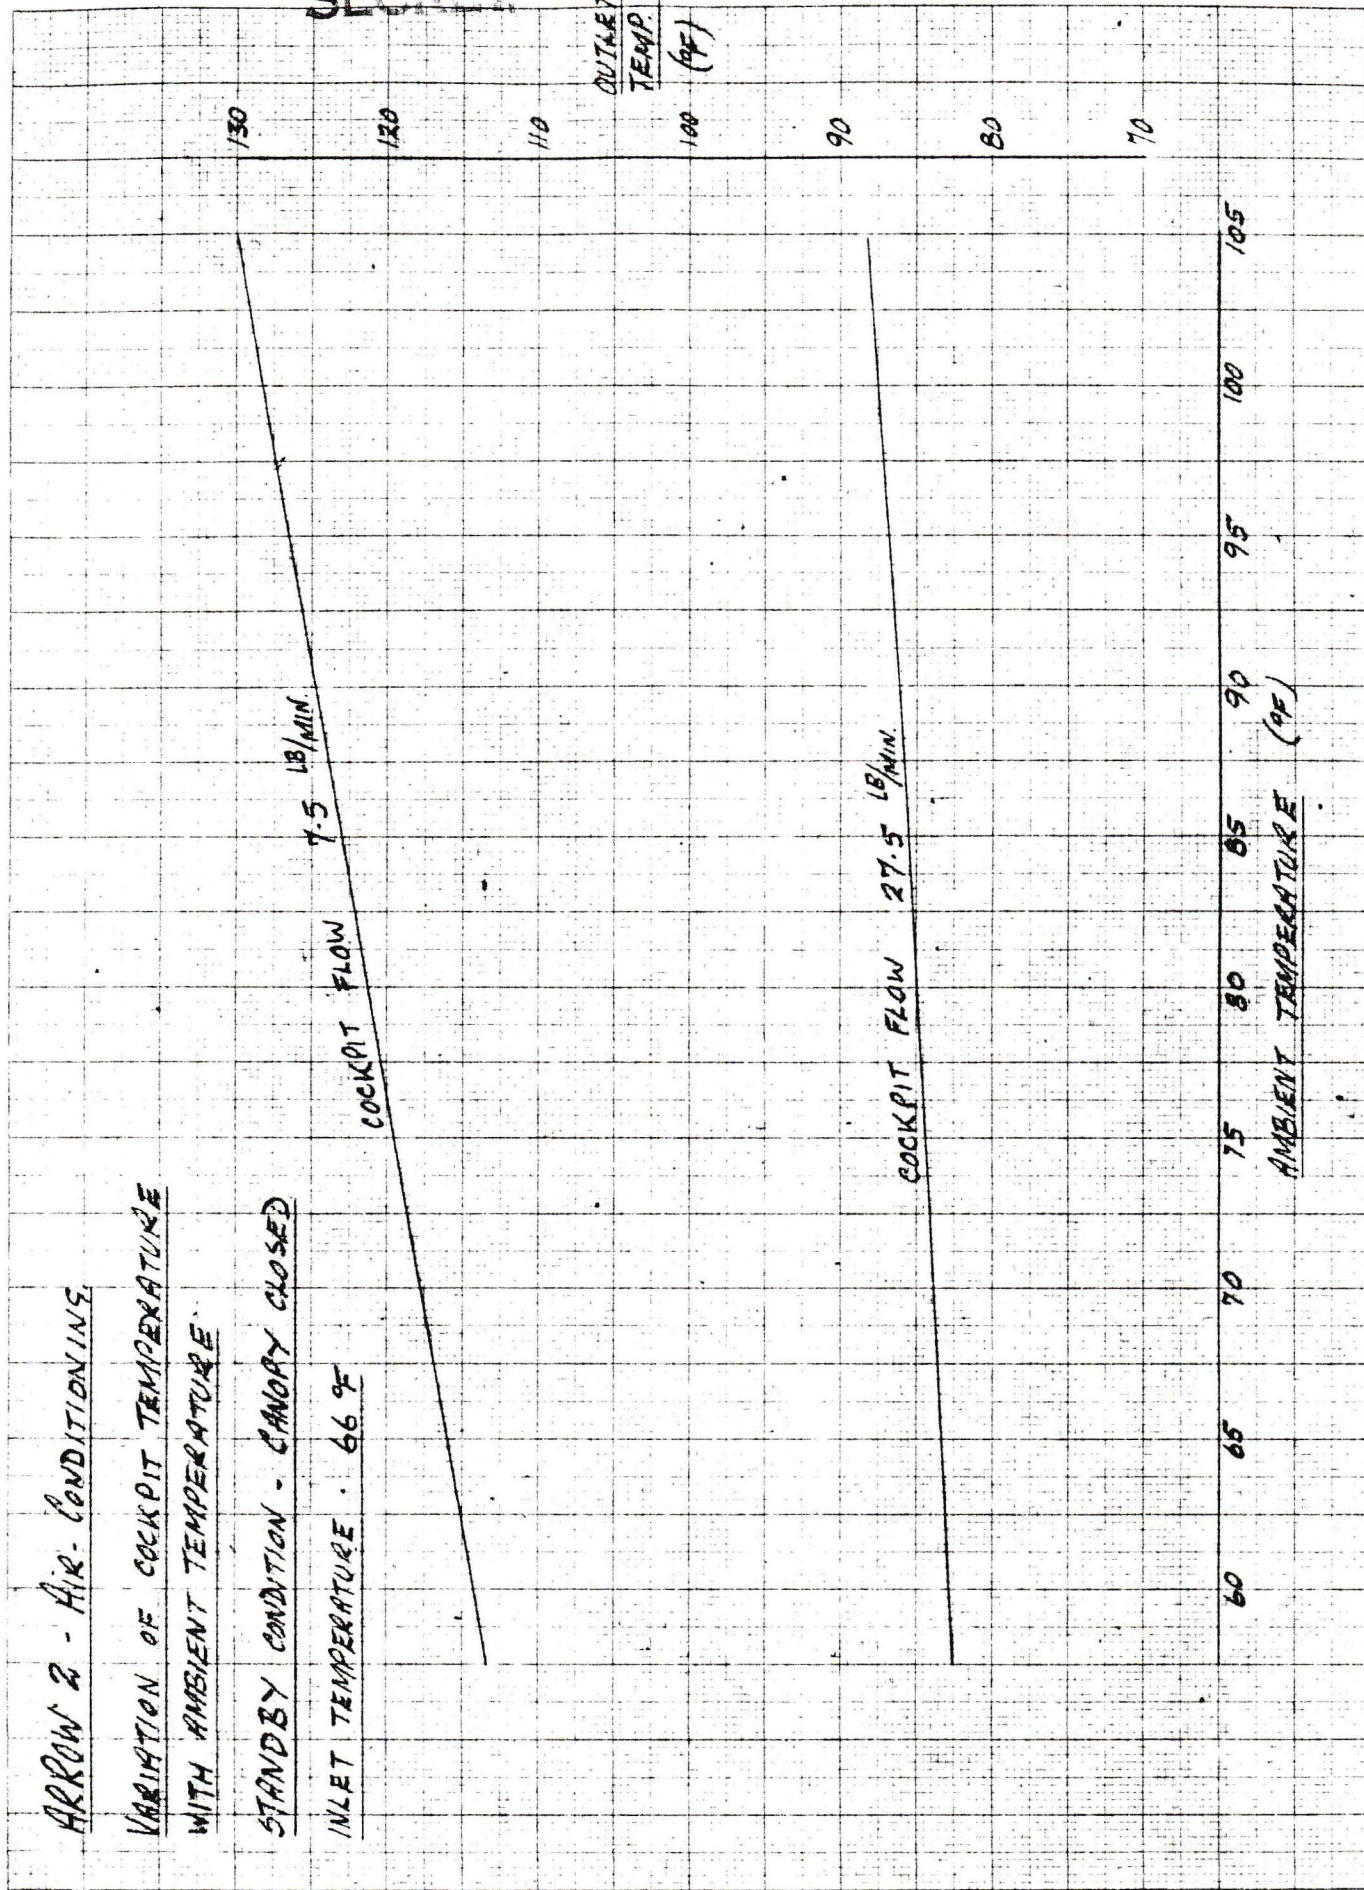

UNCLASSIFIED

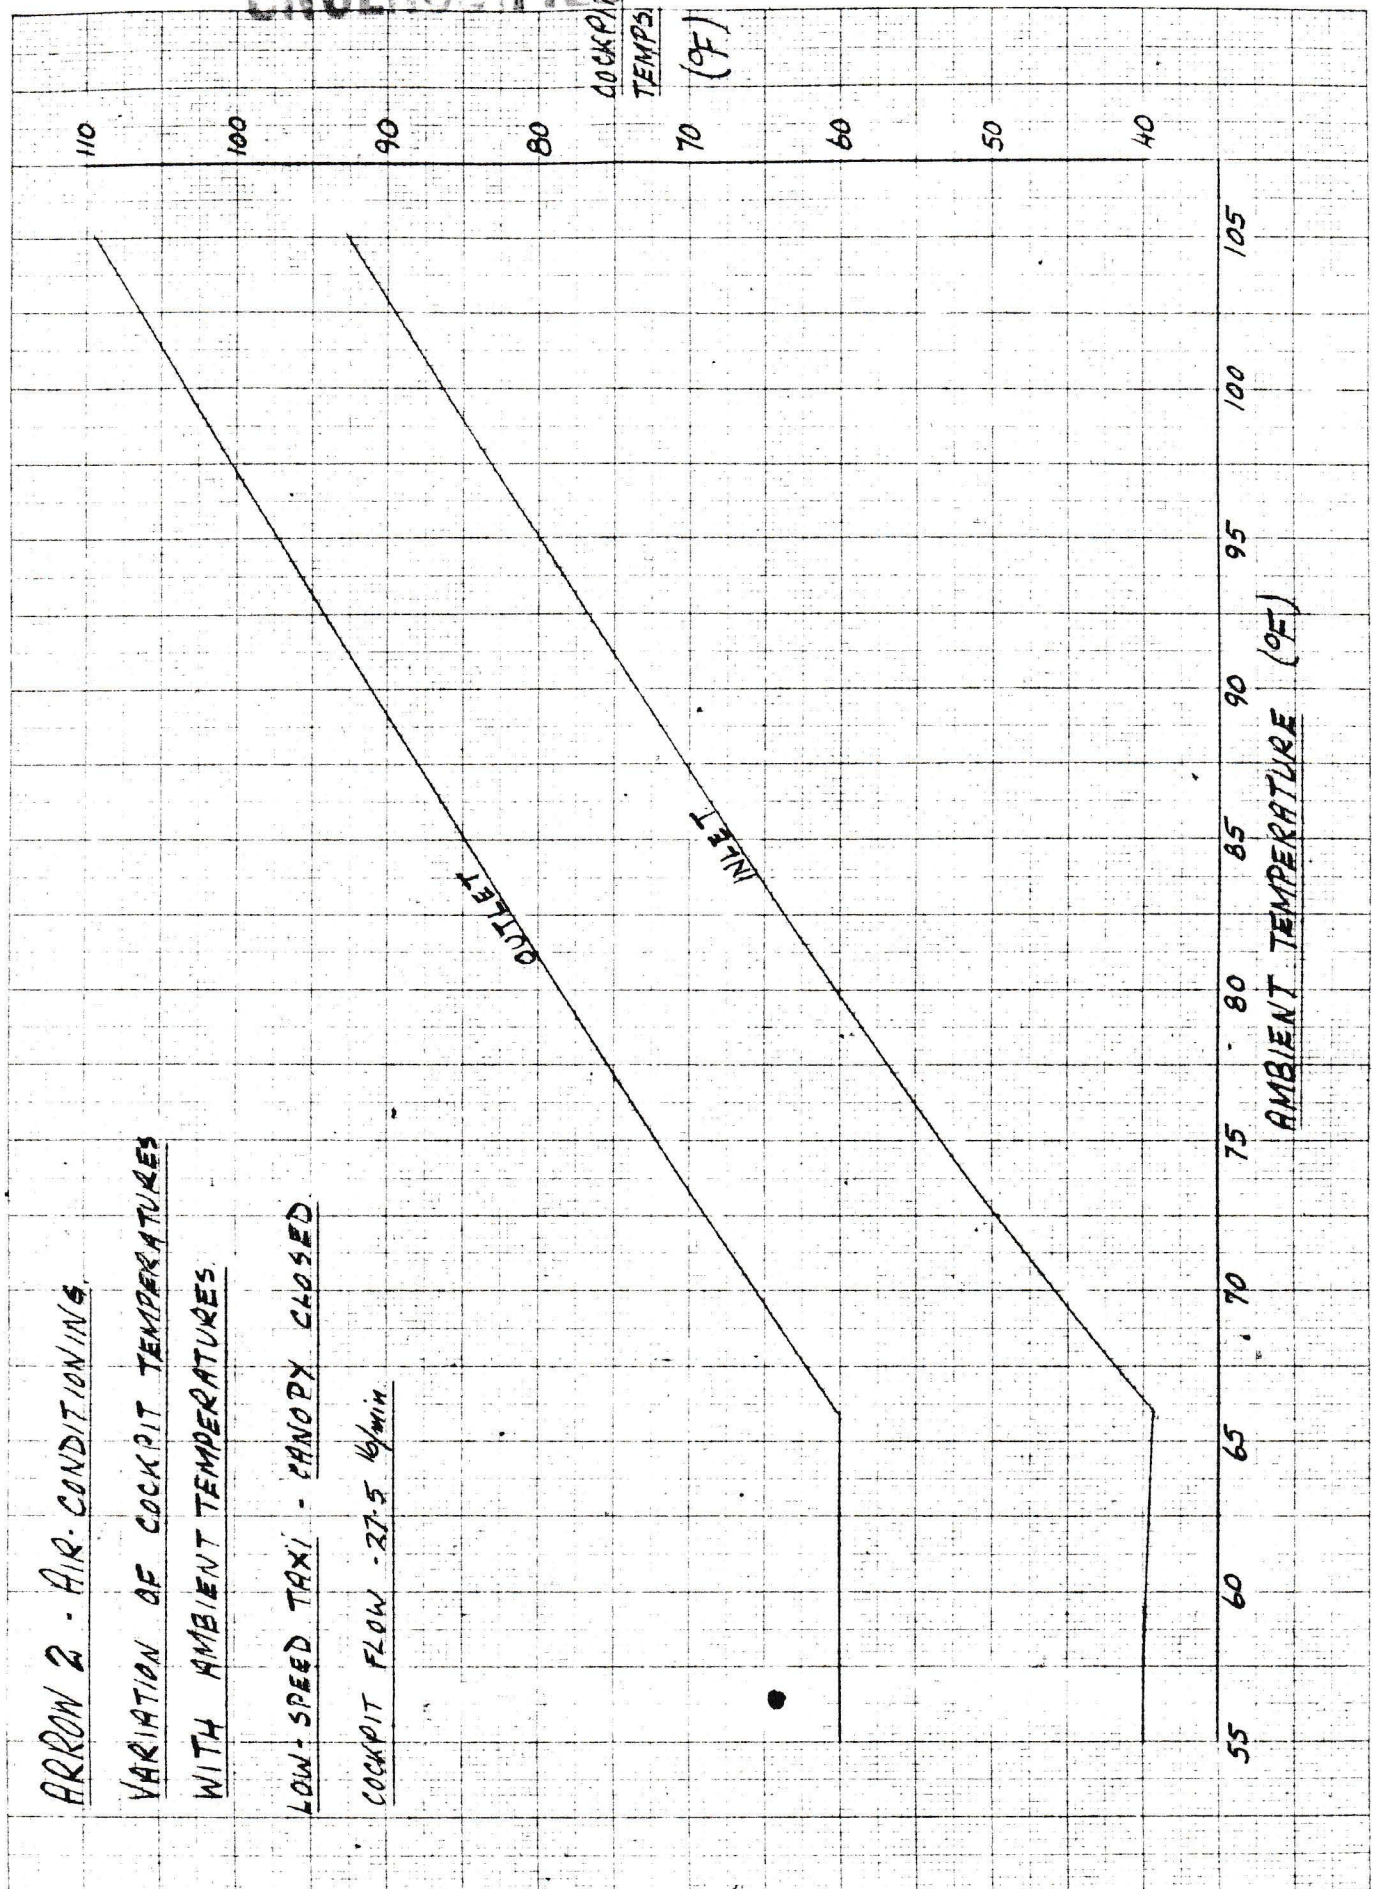

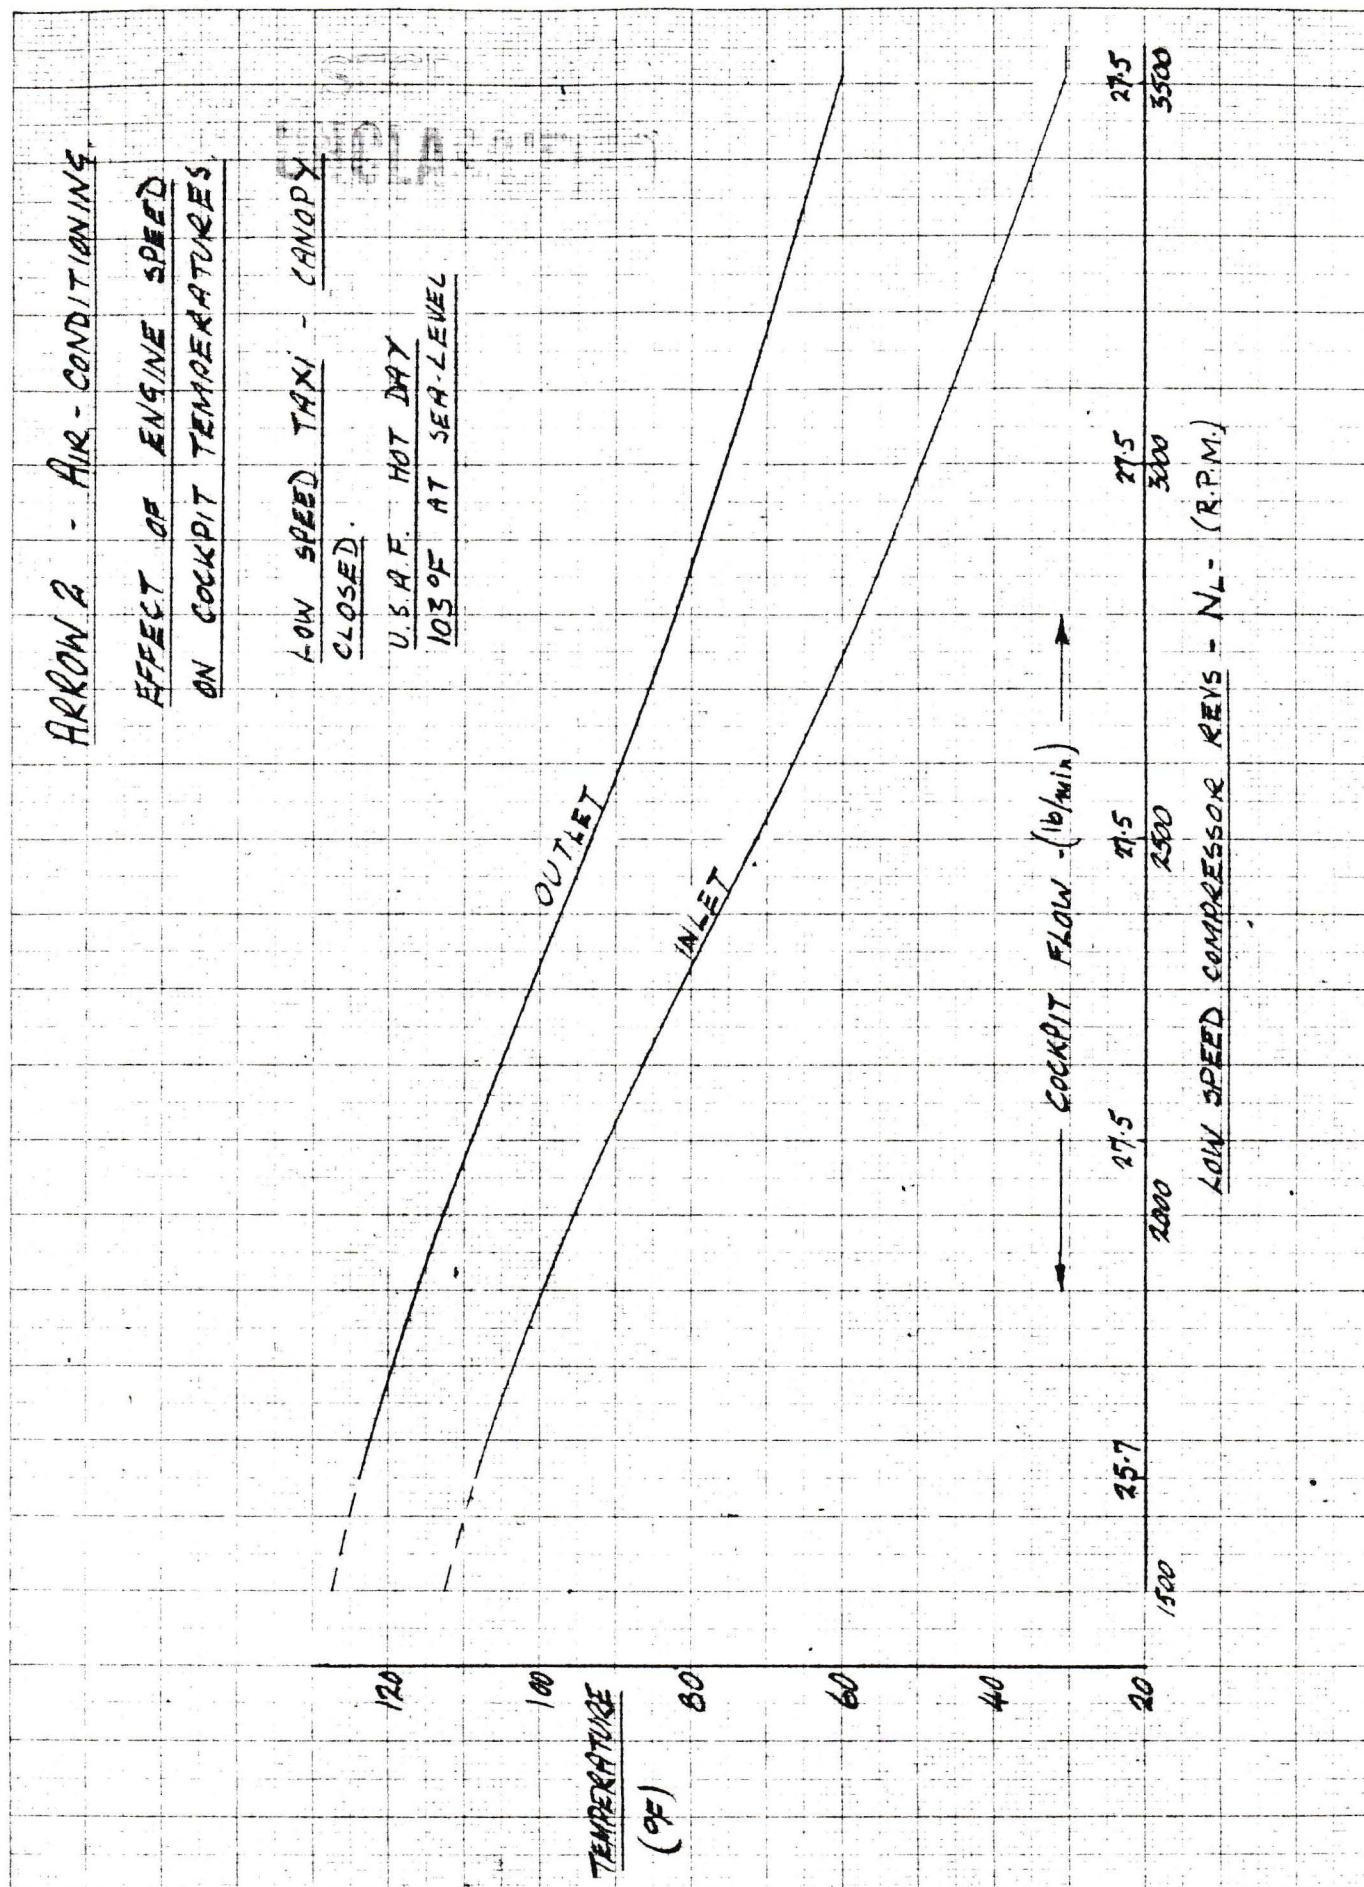


TEMPERATURE - Vs - TIME
EXTREME MISSION

SECRET
UNCLASSIFIED

CF 105 Mk 2.

STANDARD HOT DAY.

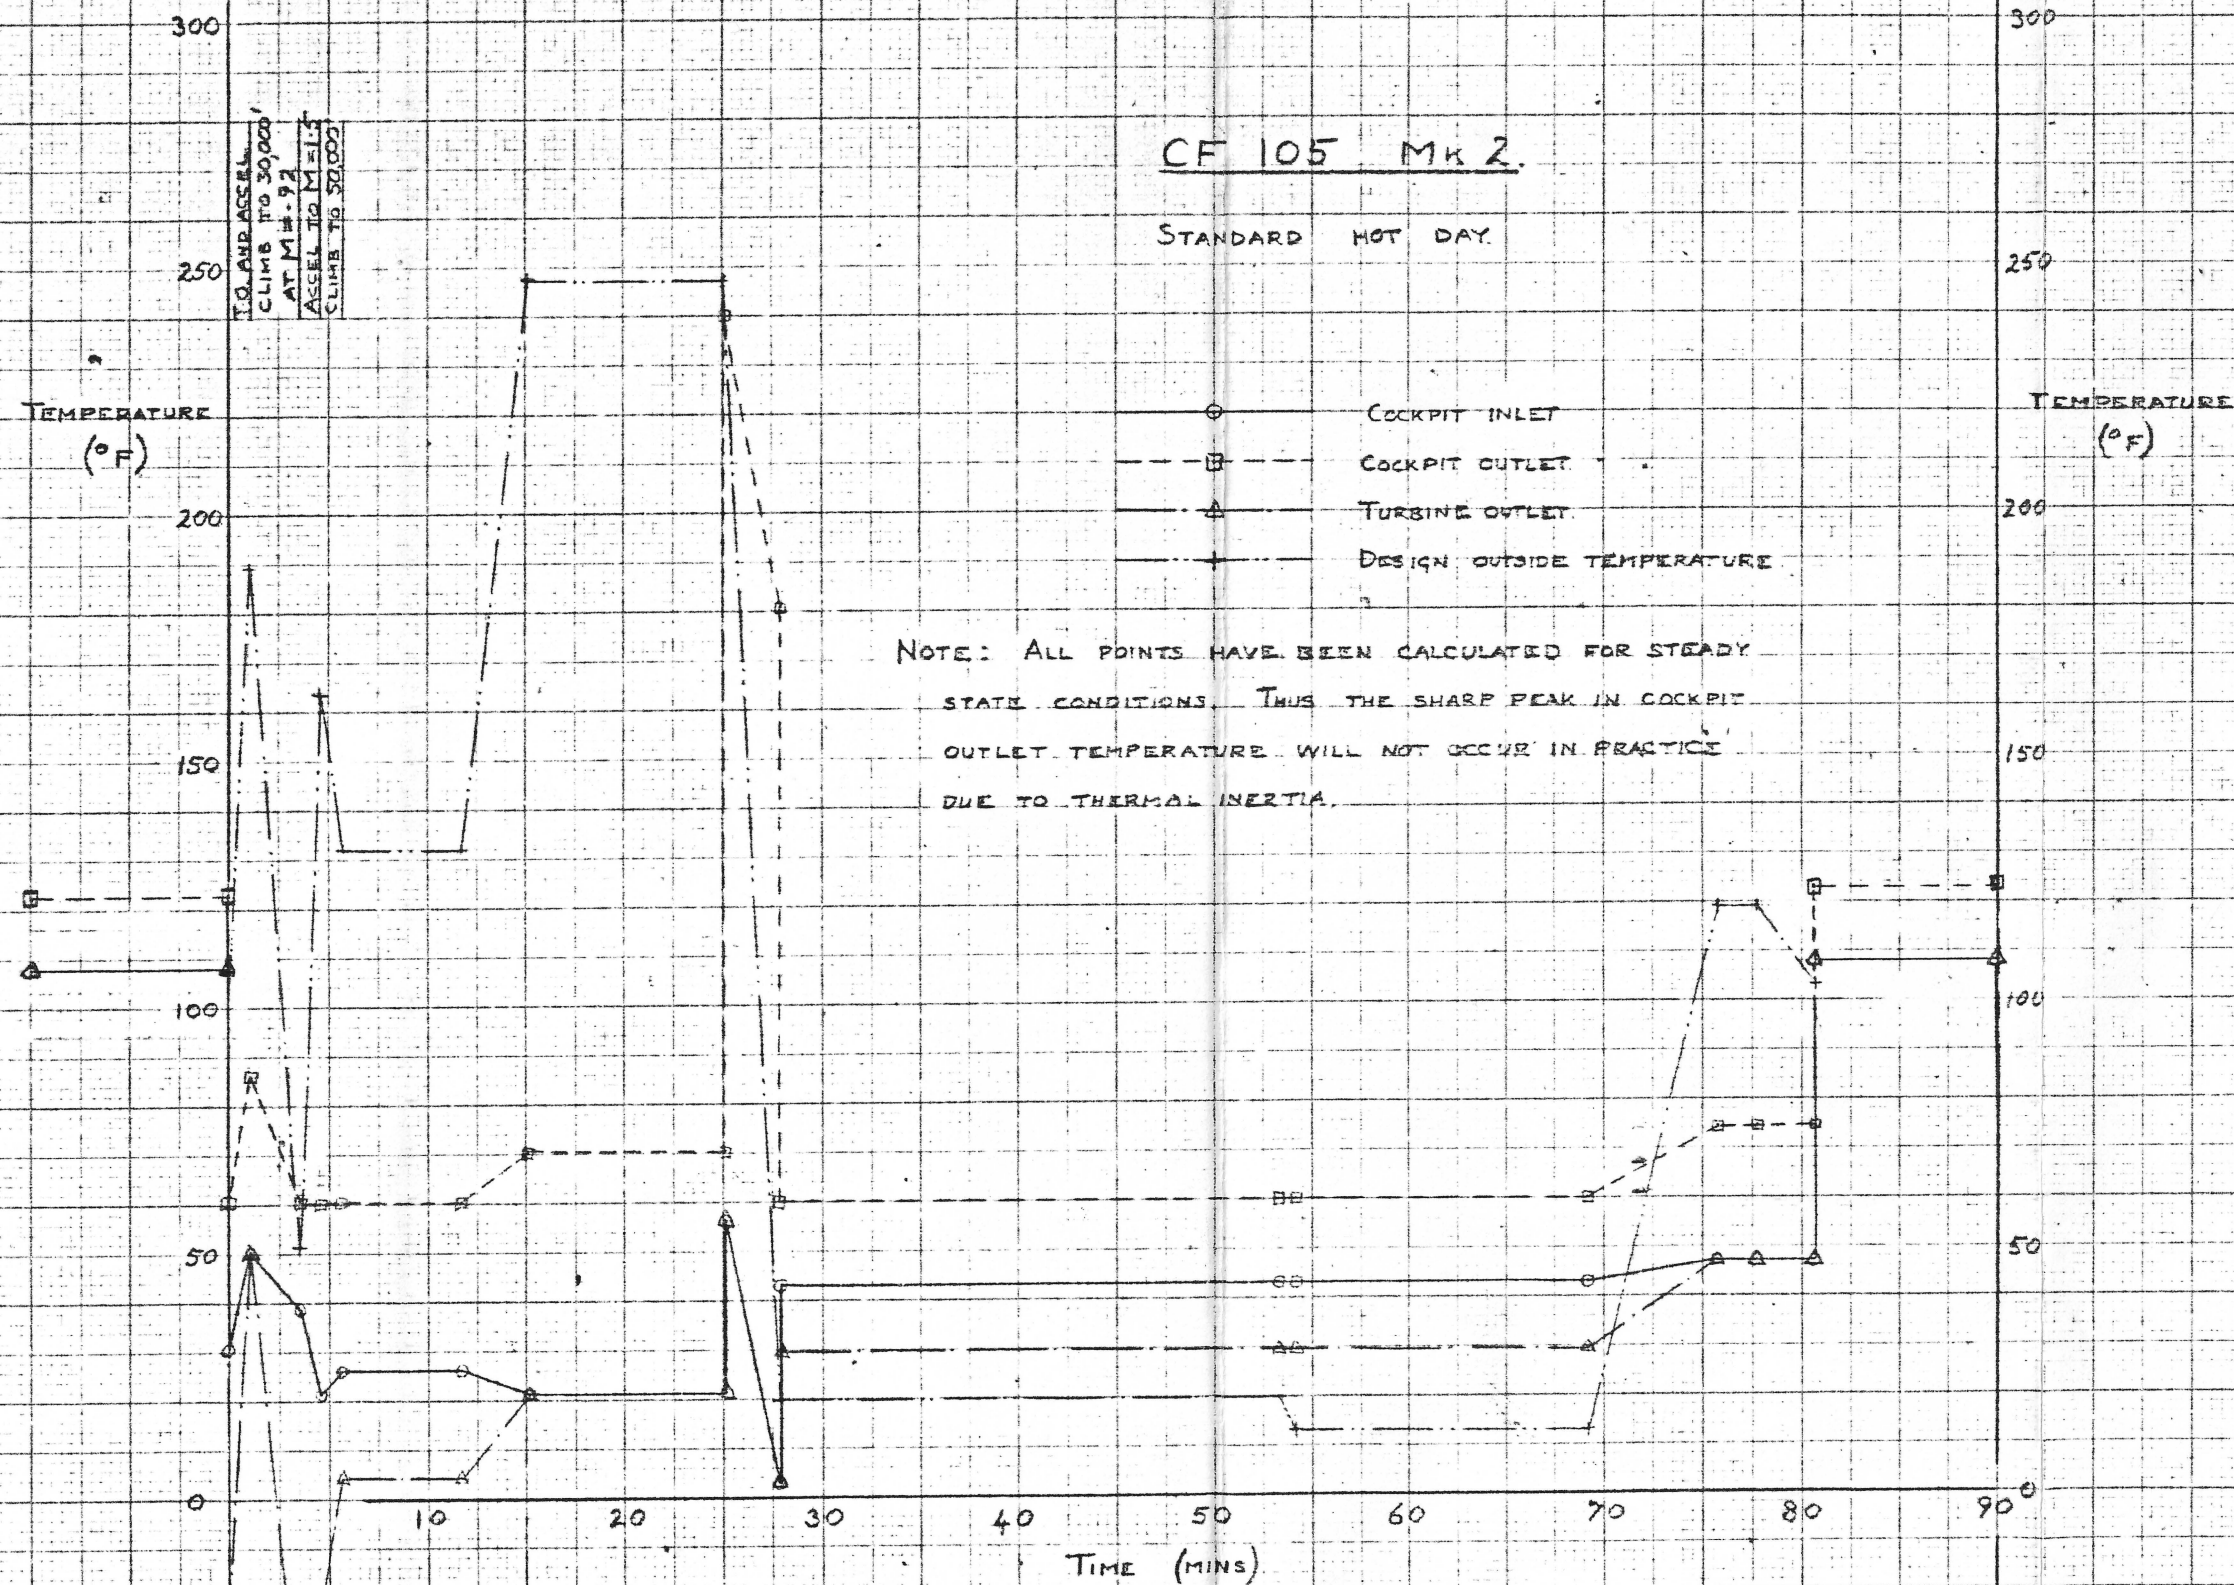

TAXI
1650 RPM.
-50

CRUISE AT
M=1.5
50,000'

ACCEL TO M=2.0
CLIMB TO 60,000'

COMBAT AT
M=2.0 60,000'

DECEL TO M=1.2
DESCEND TO 40,000'

CRUISE AT M=1.2 40,000'

DECEL TO M=1.0
CLIMB TO 40,000'

STACK AT M=1.0
40,000'

DESCEND
TO M=1.0
AT S.L.


CIRCUIT M=1.0
LANDING

TAXI
1650 RPM.

-50

SECRET
UNCLASSIFIED

CF 105 Mk2

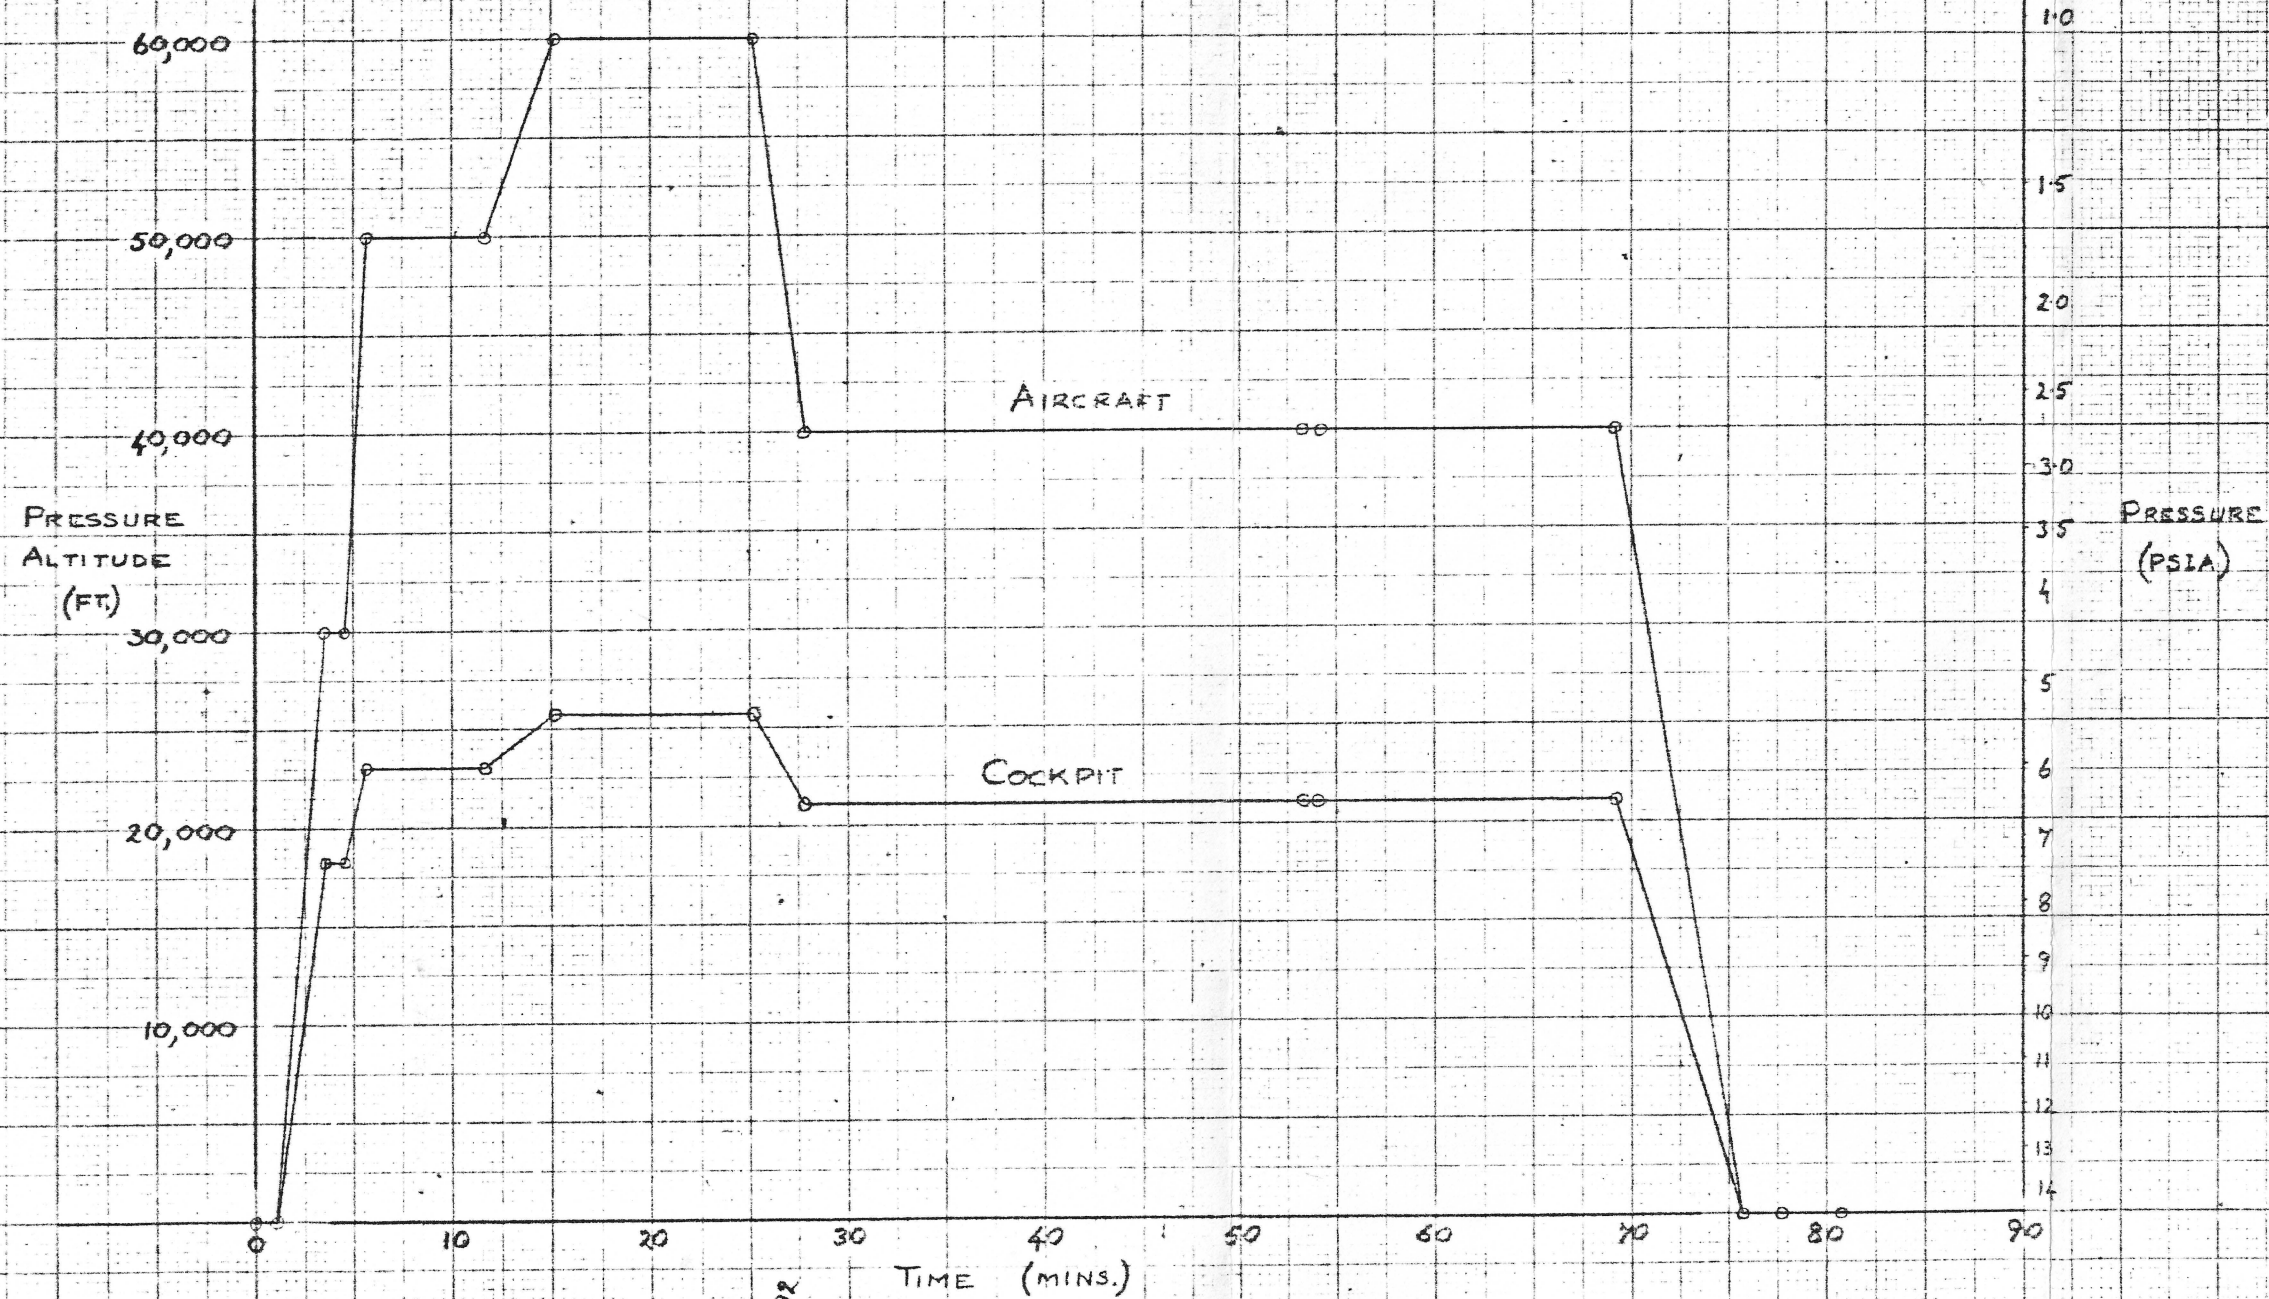

TAXI

TO AND ACCEL.
CLIMB AT M=0.92

ACCEL TO M=1.5
CLIMB AT M=1.5

CRUISE
AT M=1.5

ACCEL TO M=2.0
CLIMB

COMBAT AT
M=2.0

DESCENT TO M=0.92

CRUISE AT M=0.92

DESCENT TO M=0.89

STACK AT M=0.89


DESCENT
TO S.L.

CIRCUIT

LANDING

TAXI

UNCLASSIFIED

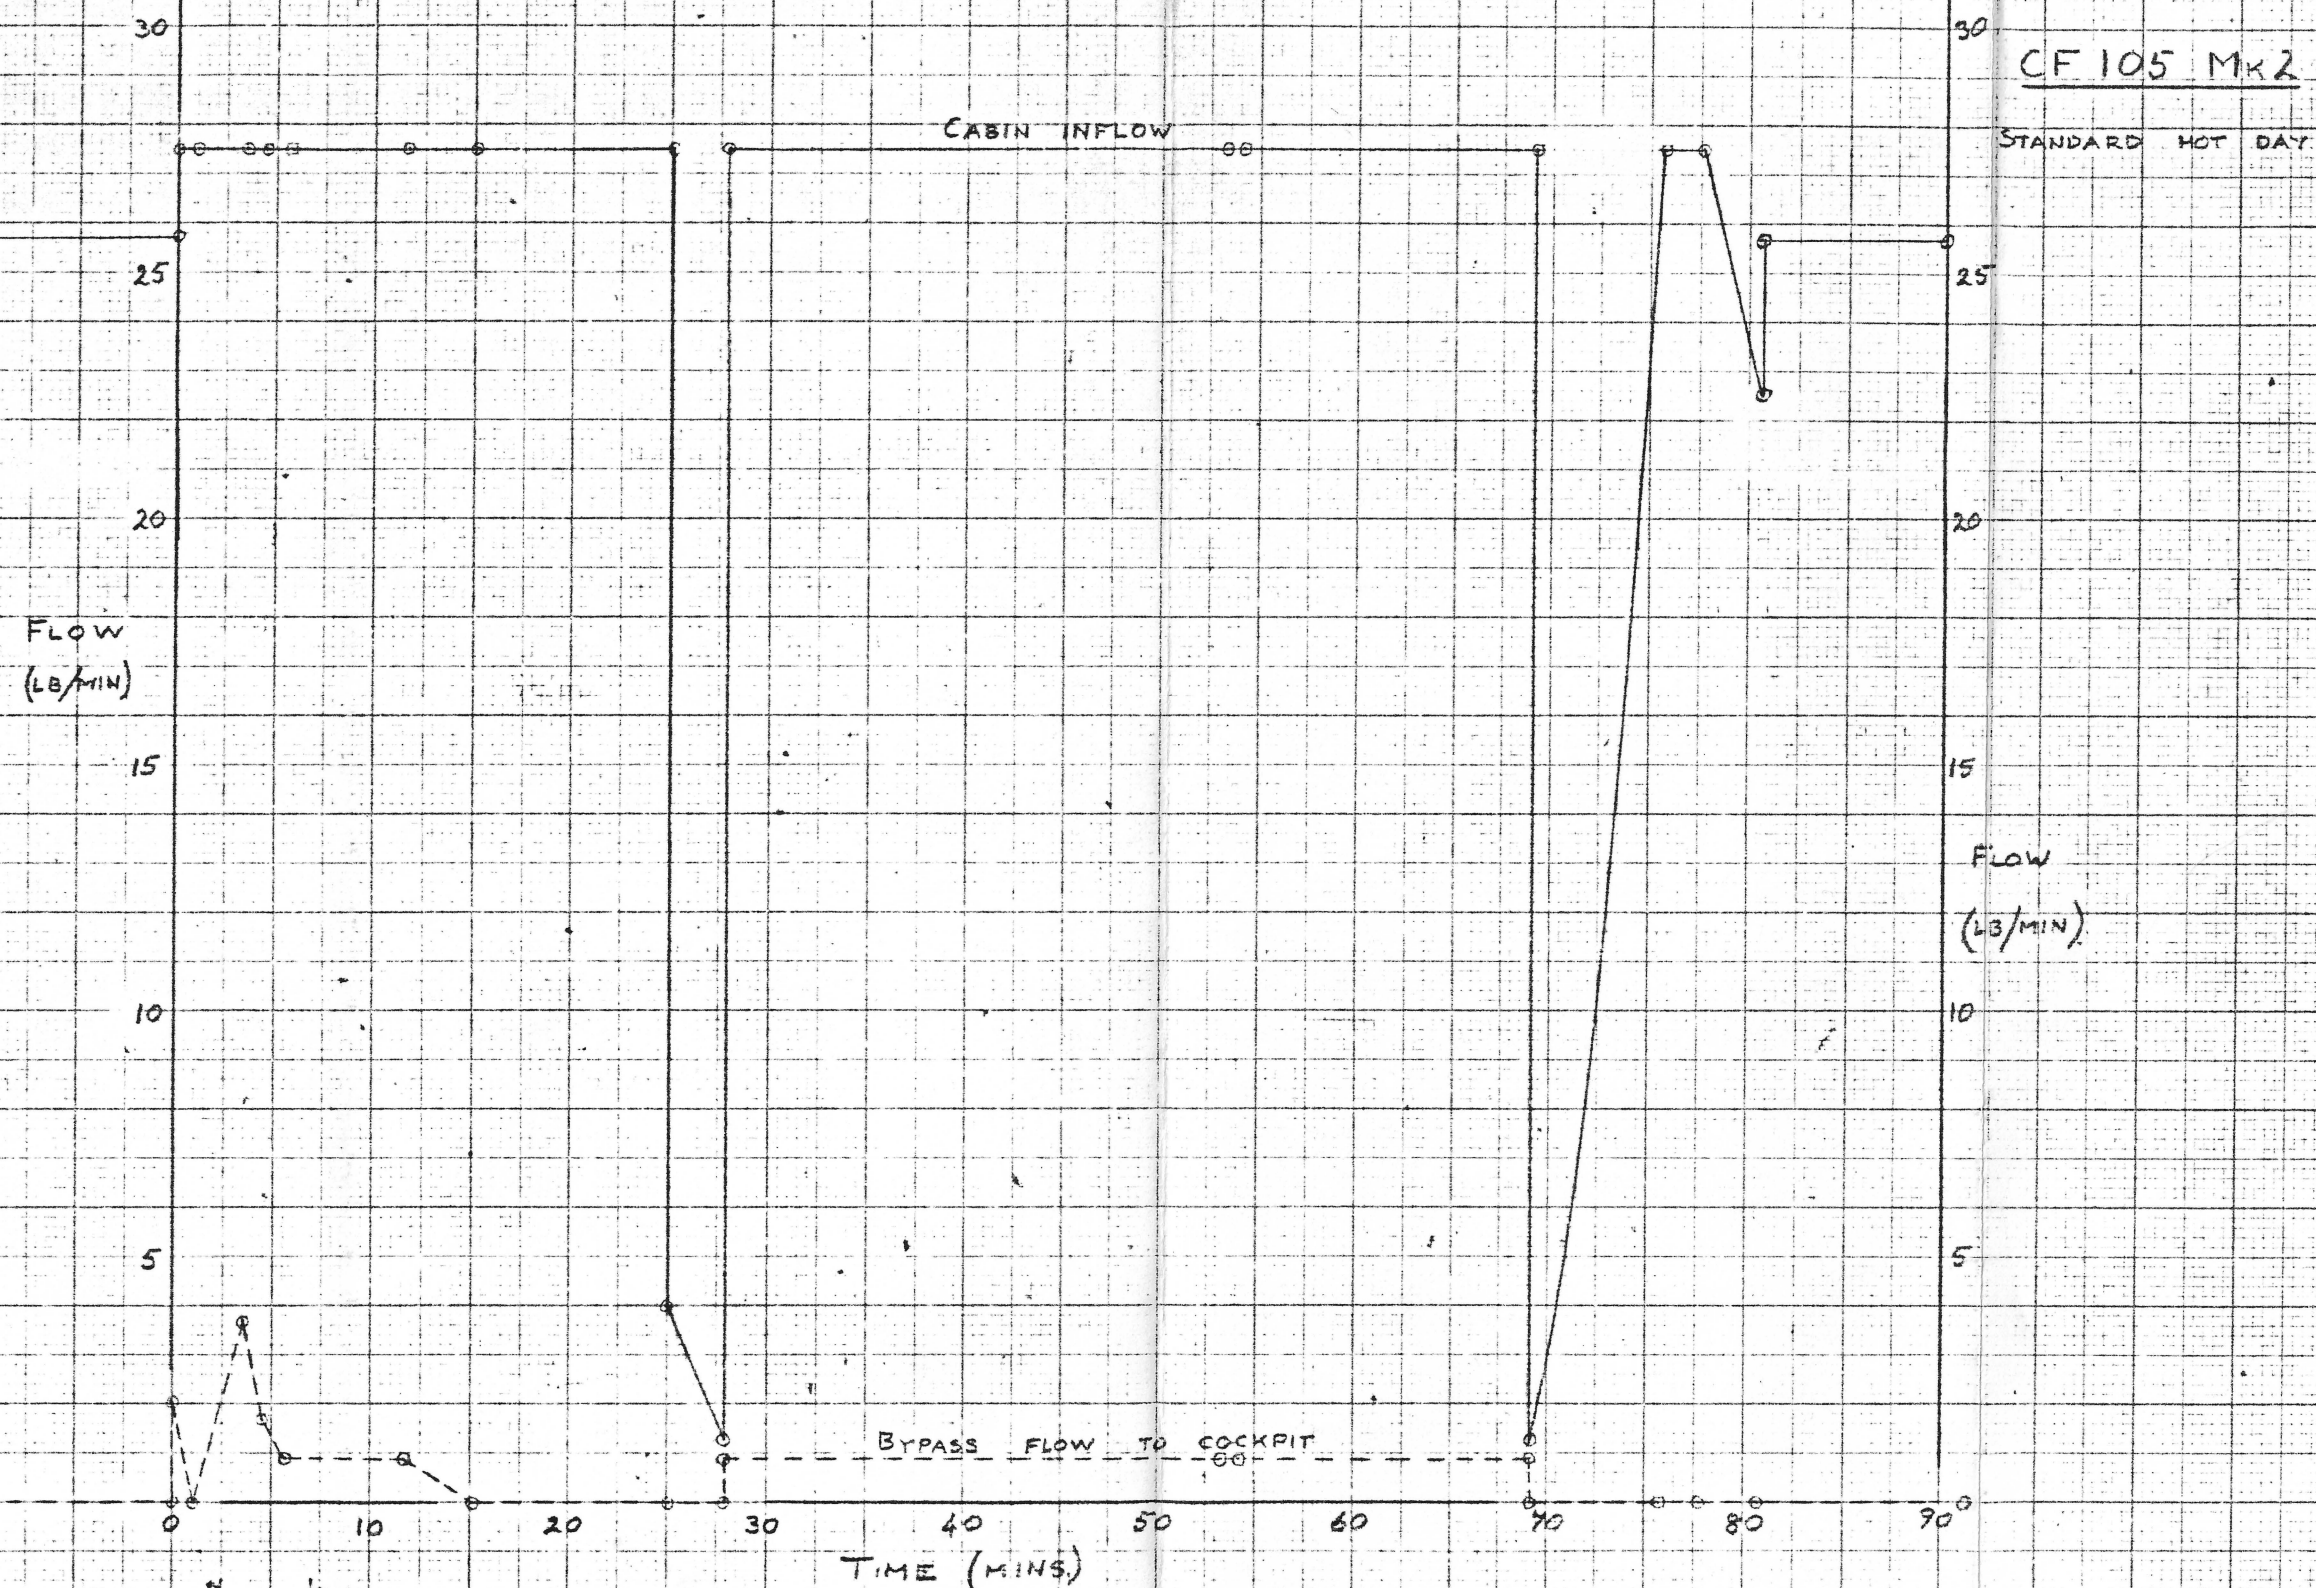TAXI
1650 RPMT.O. AND ACCEL.
CLIMB TO 30,000' M=92ACCEL. TO M=1.5
CLIMB TO 50,000'CRUISE AT M=1.5
50,000'ACCEL. TO M=2.0
CLIMB TO 60,000'COMBAT AT
M=2.0
60,000'DESCEND TO
40,000' AT M=92

CRUISE AT 40,000' M=92

DESCEND TO
40,000' AT M=87STACK AT M=87
40,000'DESCEND TO
SL. AT M=1.4


CIRCUIT M=1.4

LANDING

TAXI
1650 RPM.


UNCLASSIFIED

ARROW 2 - AIR-CONDITIONING
LIMITATIONS OF EMERGENCY
RAM-AIR SYSTEM (100°F RAM TEMP.)

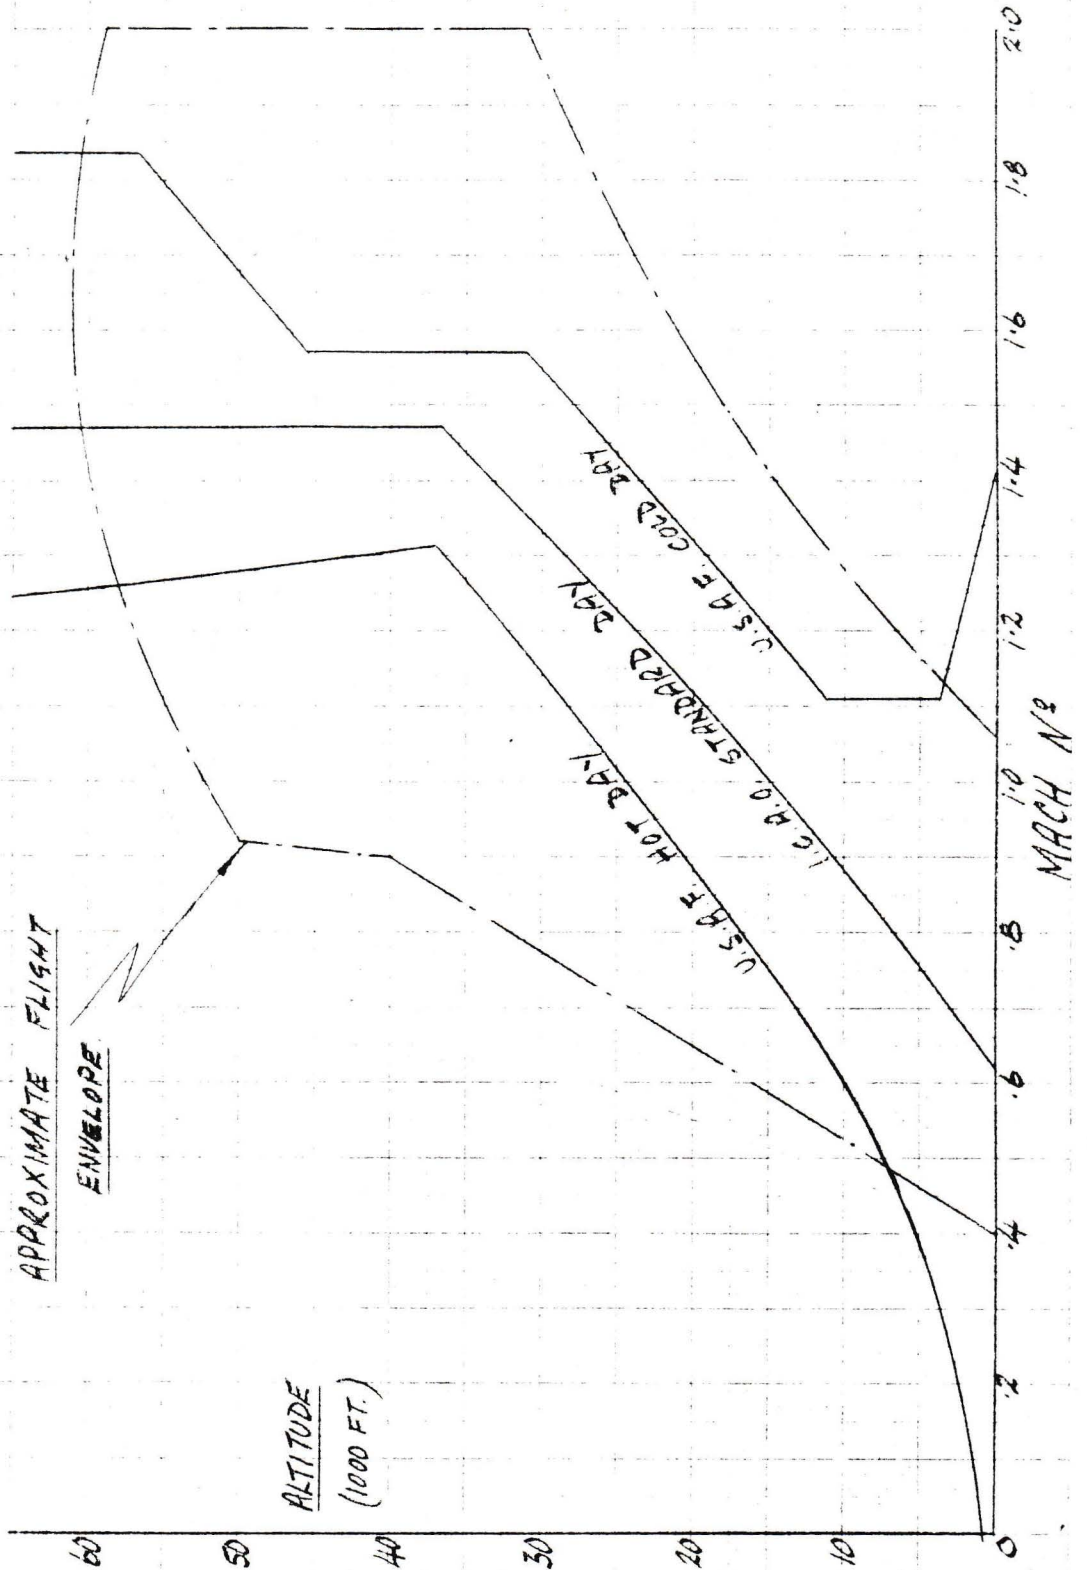

TOTAL PRESSURES & TEMPERATURES
IN I.C.A.O. STANDARD ATMOSPHERE

UNCLASSIFIED

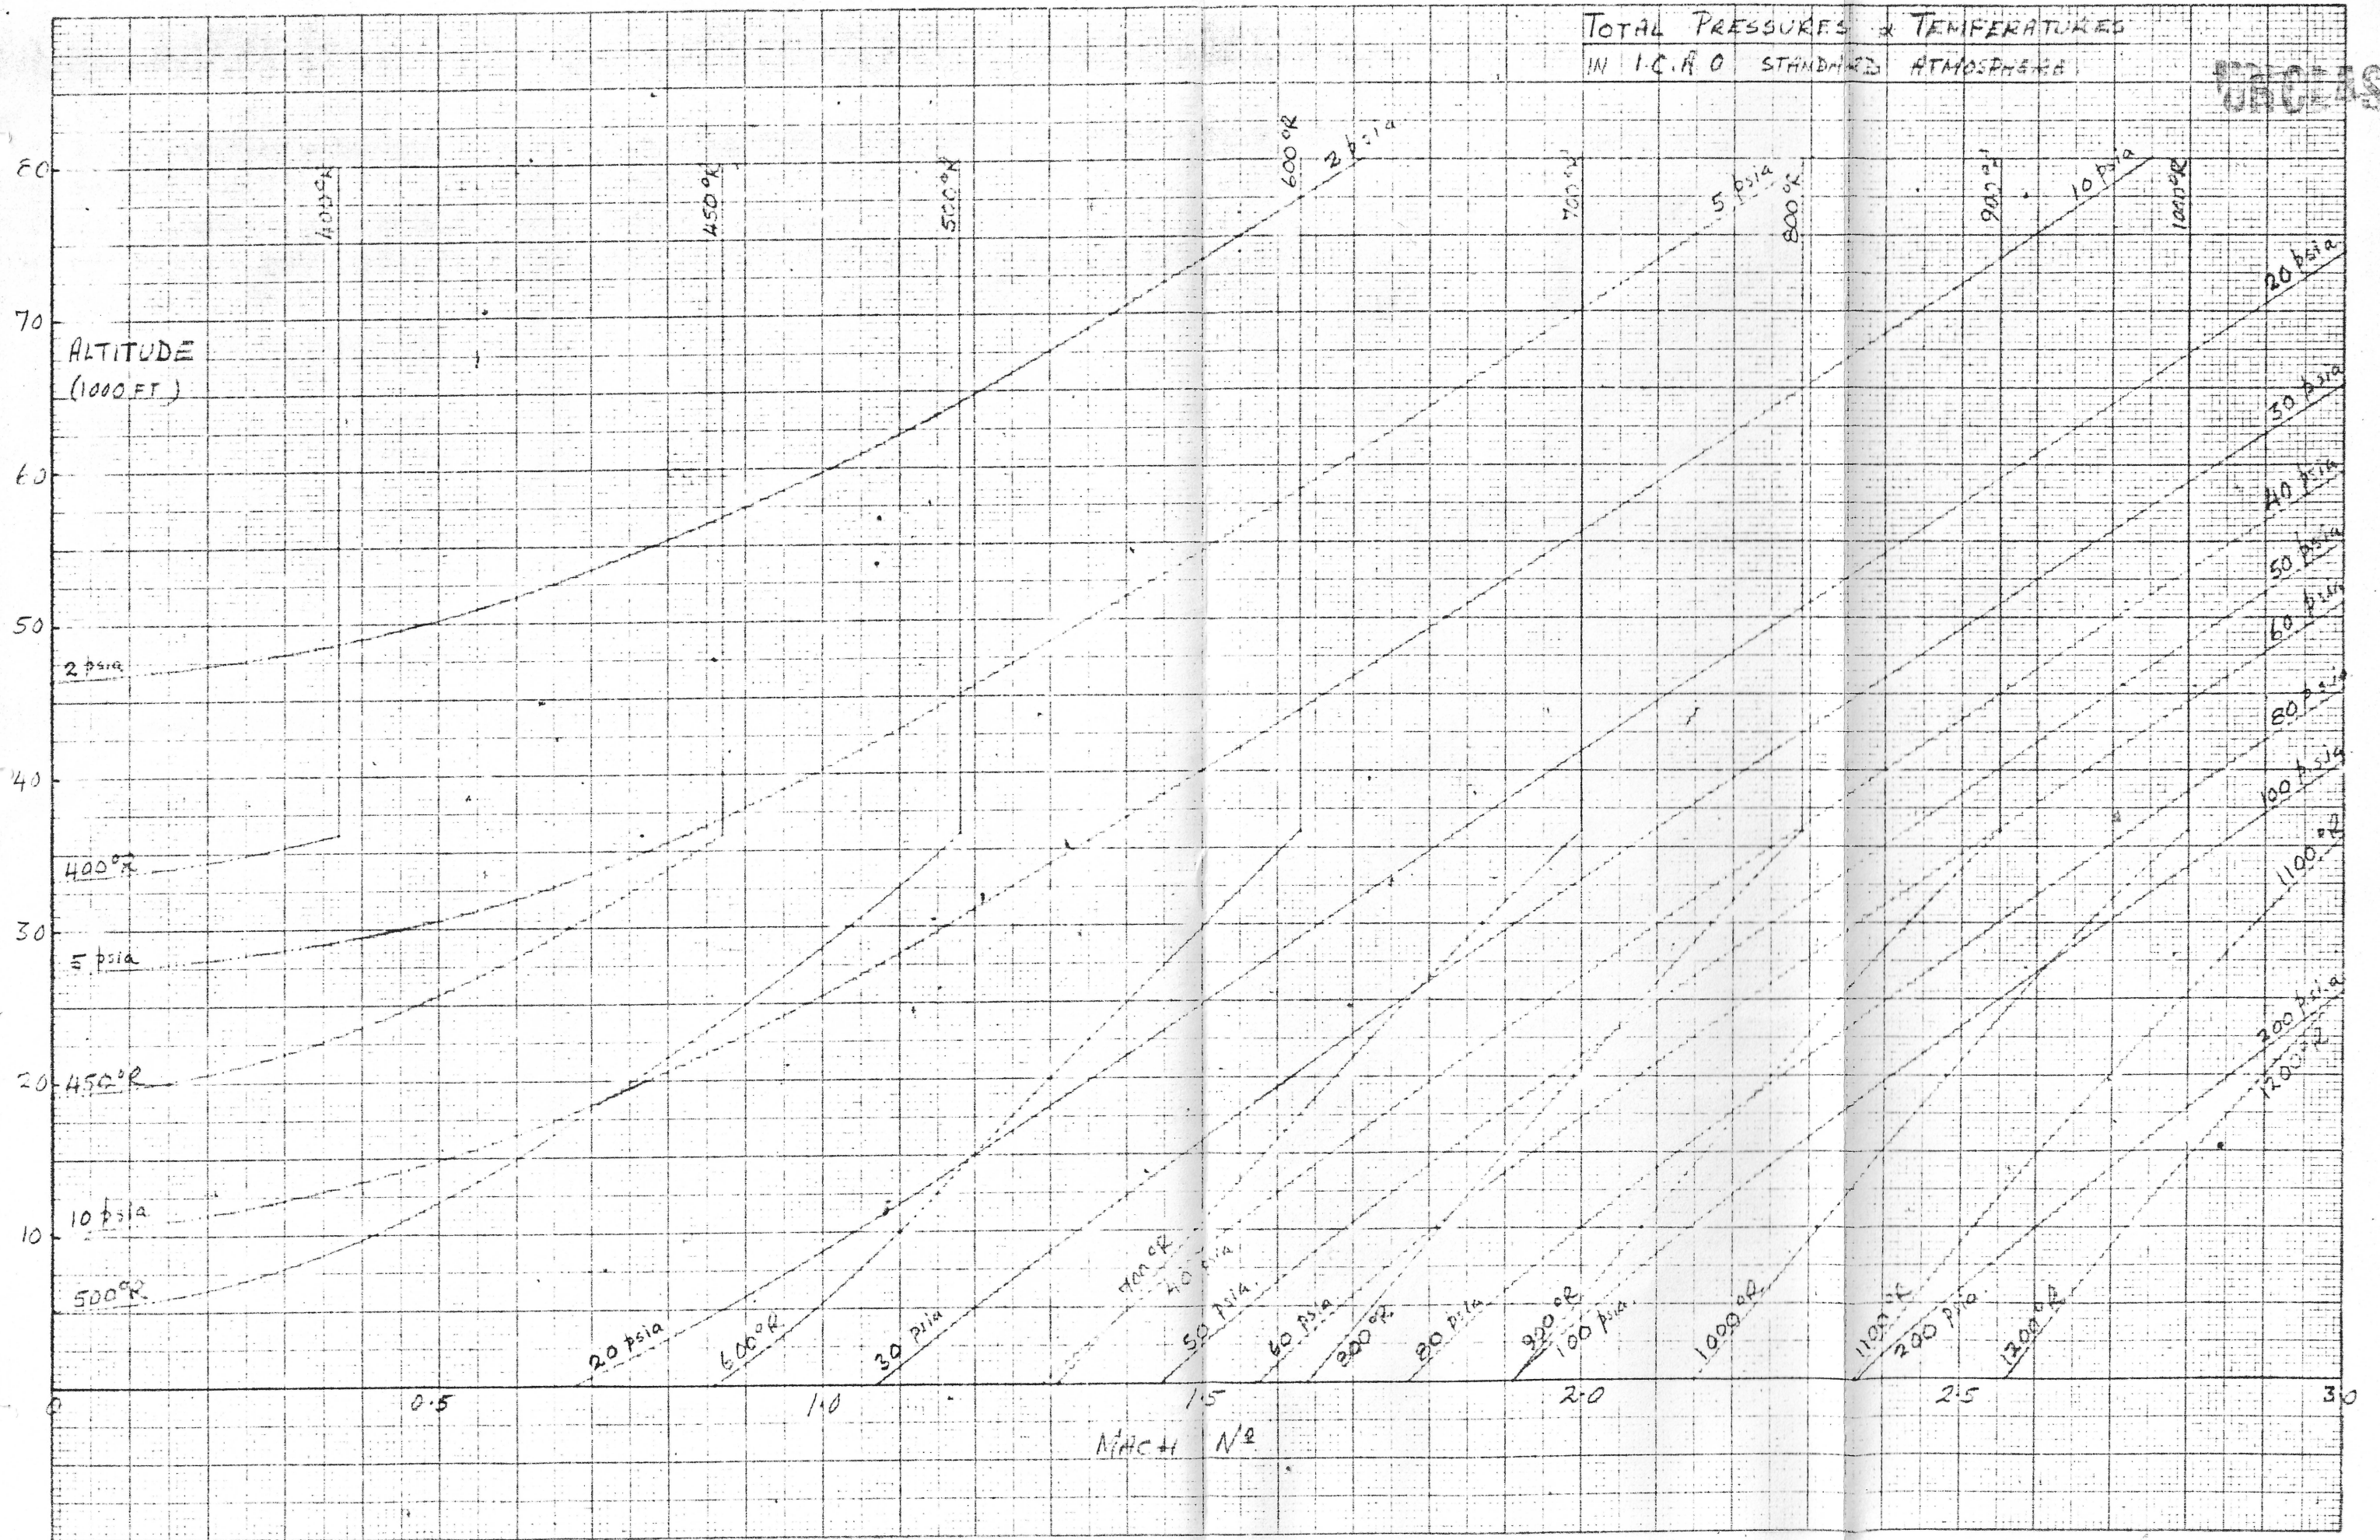



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 72/SYSTEMS 22/170

SHEET NO. FIG. 12.

AIRCRAFT

ARROW 2

AIR-CONDITIONING.

PREPARED BY

A G LOWE.

DATE


APRIL '58

CHECKED BY

DATE


AIR SUPPLY TO VENTILATED SUIT

GROUND USE ONLY.

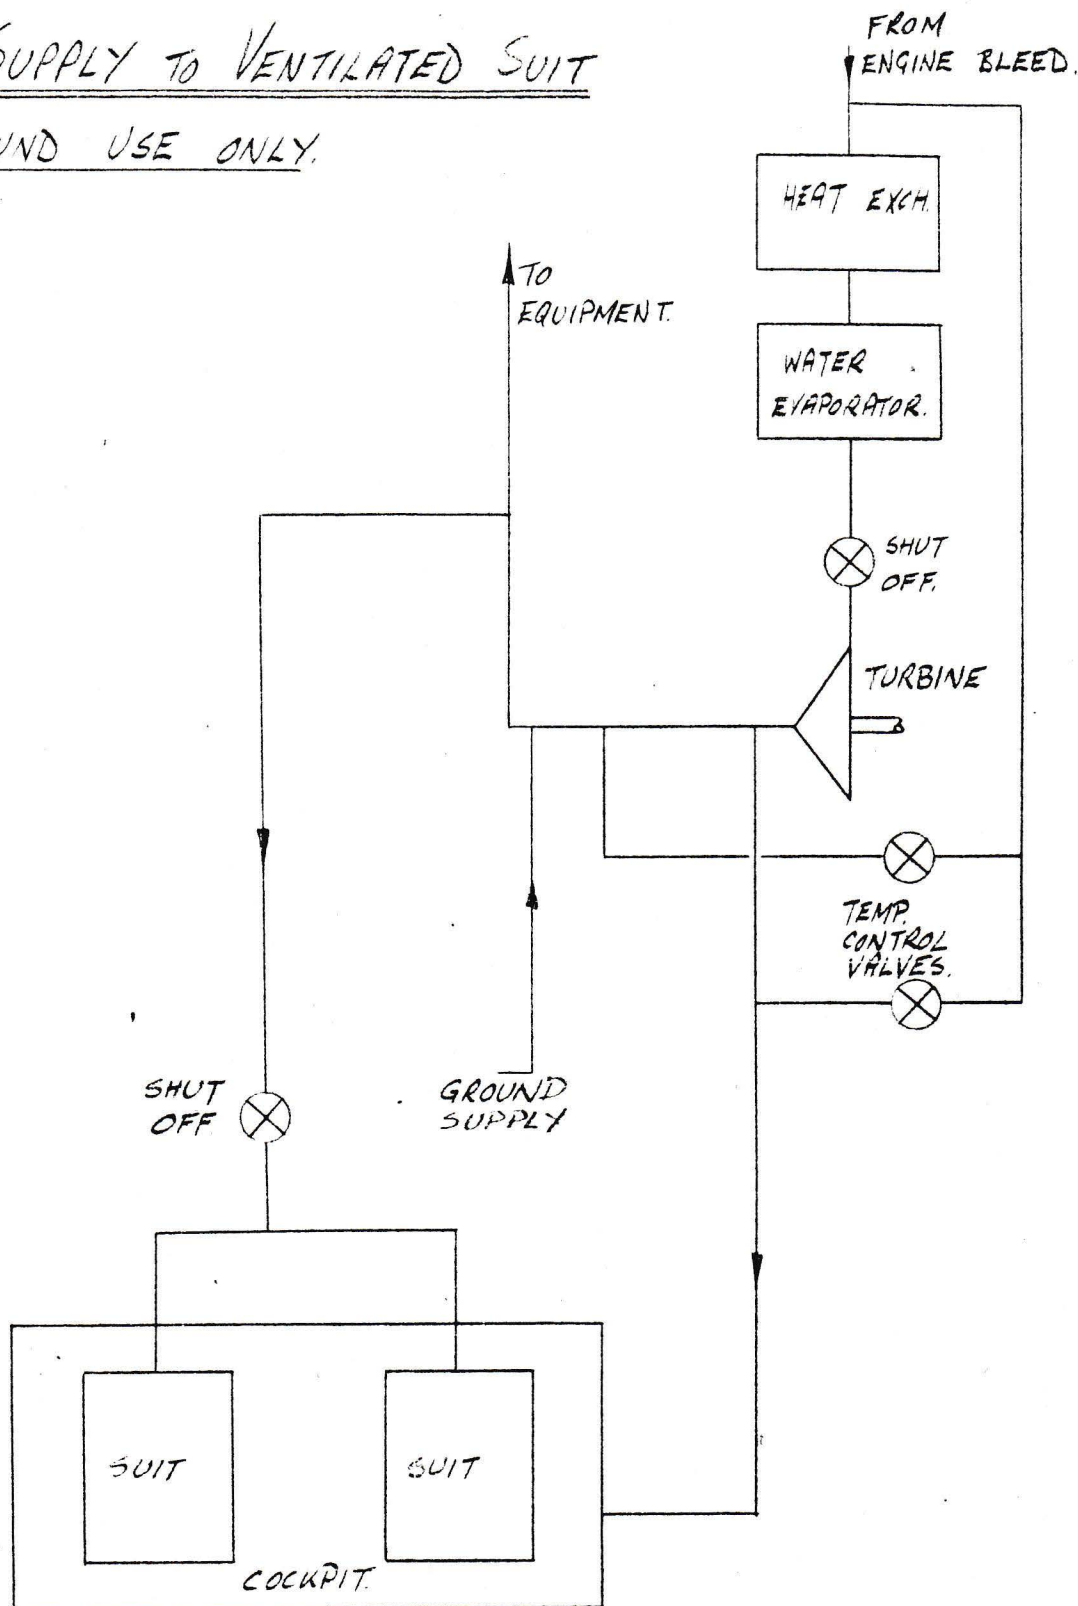

ARROW 2 - AIR-CONDITIONING

PRESSURES REQUIRED FOR EQUIPMENT
COOLING AIR SUPPLY, AT SEA-LEVEL

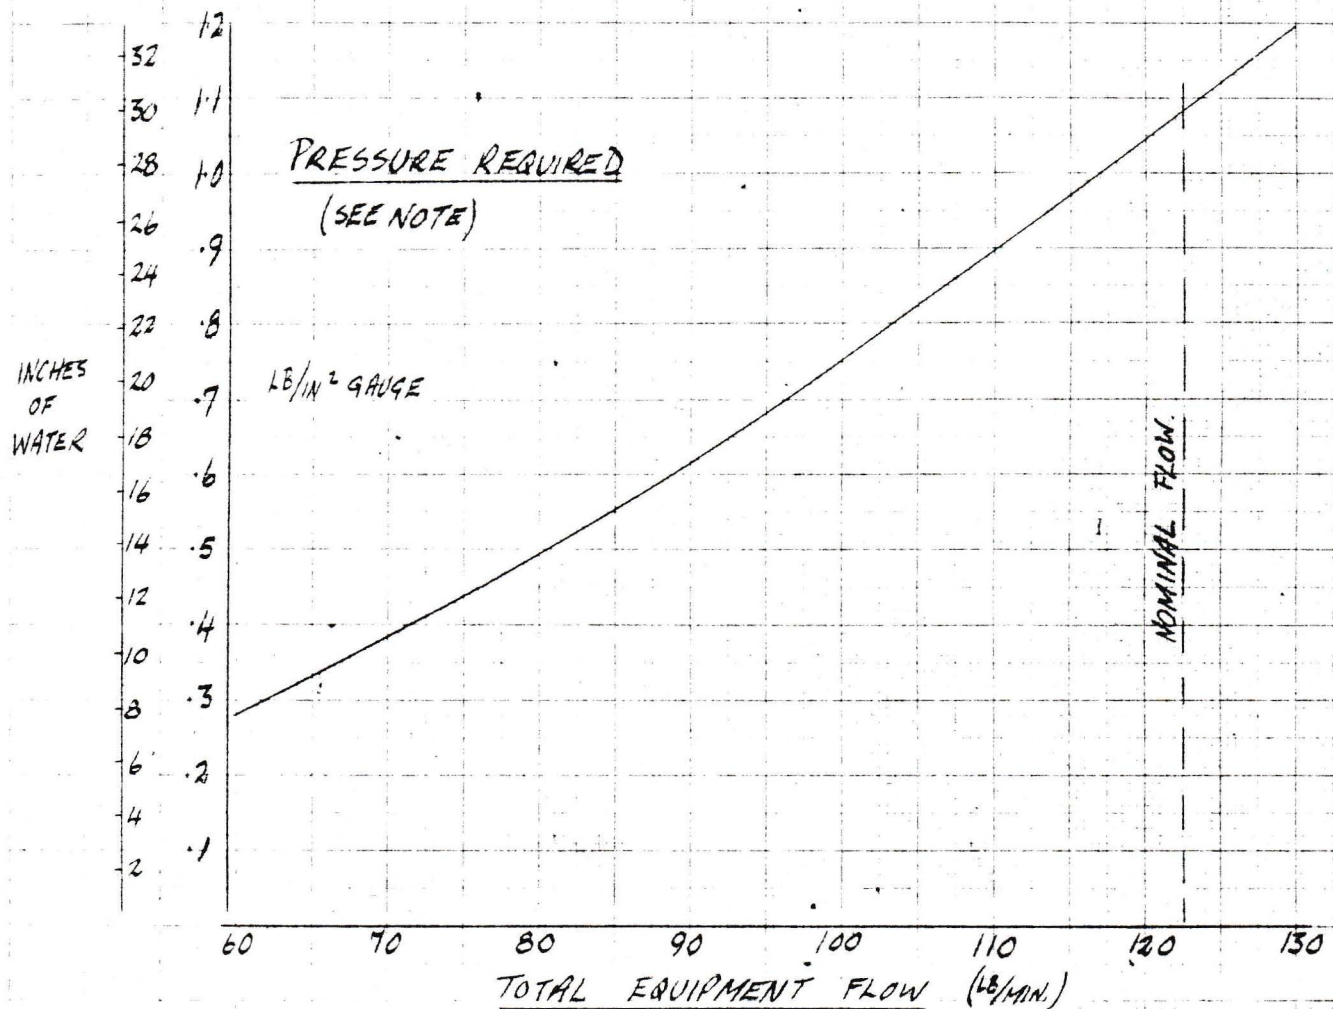UNCLASSIFIED

NOTE: THIS PRESSURE IS MEASURED AT A POINT IN THE
EQUIPMENT SUPPLY LINE FROM WHICH A VENTILATED
SUIT SUPPLY COULD BE TAKEN



AVRO AIRCRAFT LIMITED
MALTON, ONTARIO

TECHNICAL DEPARTMENT

SECRET

REPORT NO 72/SYSTEMS 22/170

SHEET NO F/G. 14

AIRCRAFT

ARROW 2

AIR. CONDITIONING

PREPARED BY

A.G. LOWE.

DATE


APRIL '58

CHECKED BY

DATE

AIR SUPPLY TO VENTILATED SUIT

GROUND & FLIGHT USE.

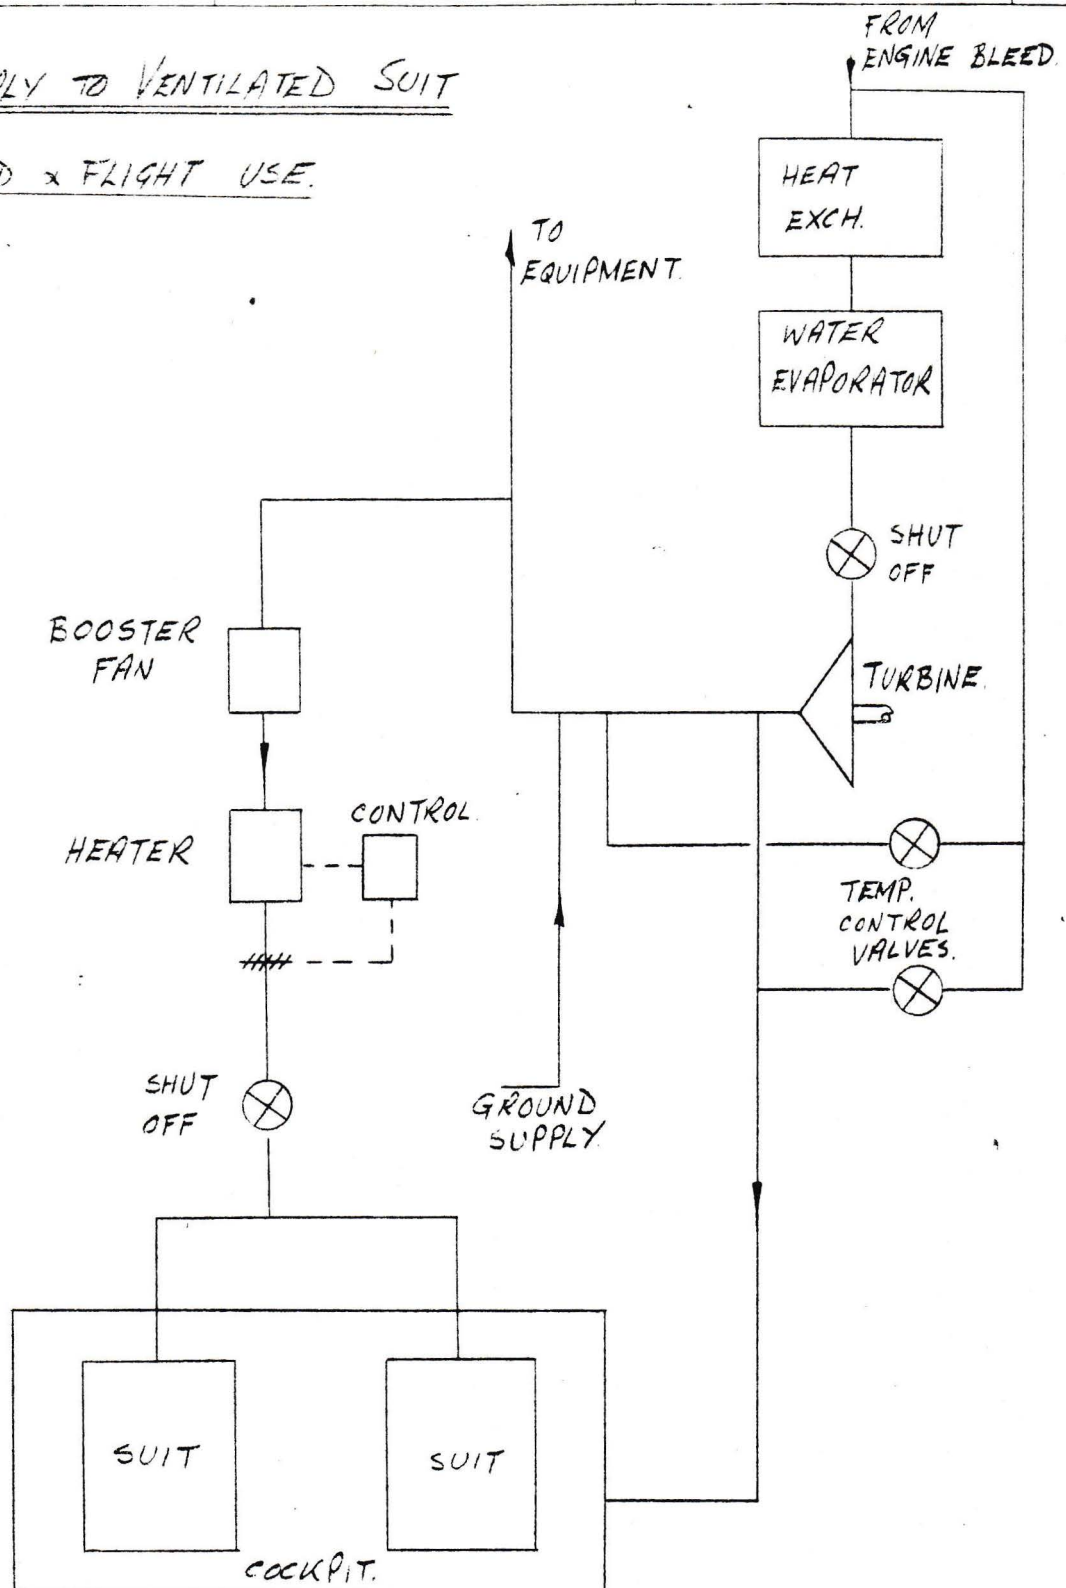



AVRO AIRCRAFT LIMITED
MALTON, ONTARIO

SECRET

REPORT NO. 72/SYSTEMS 22/170

SHEET NO. FIG. 15

TECHNICAL DEPARTMENT

AIRCRAFT

ARROW 2

AIR-CONDITIONING

PREPARED BY

DATE

A. G. LOWE


16 APR. 58

CHECKED BY

DATE

VENTILATED SUIT SUPPLY

WITH EMERGENCY PROVISION

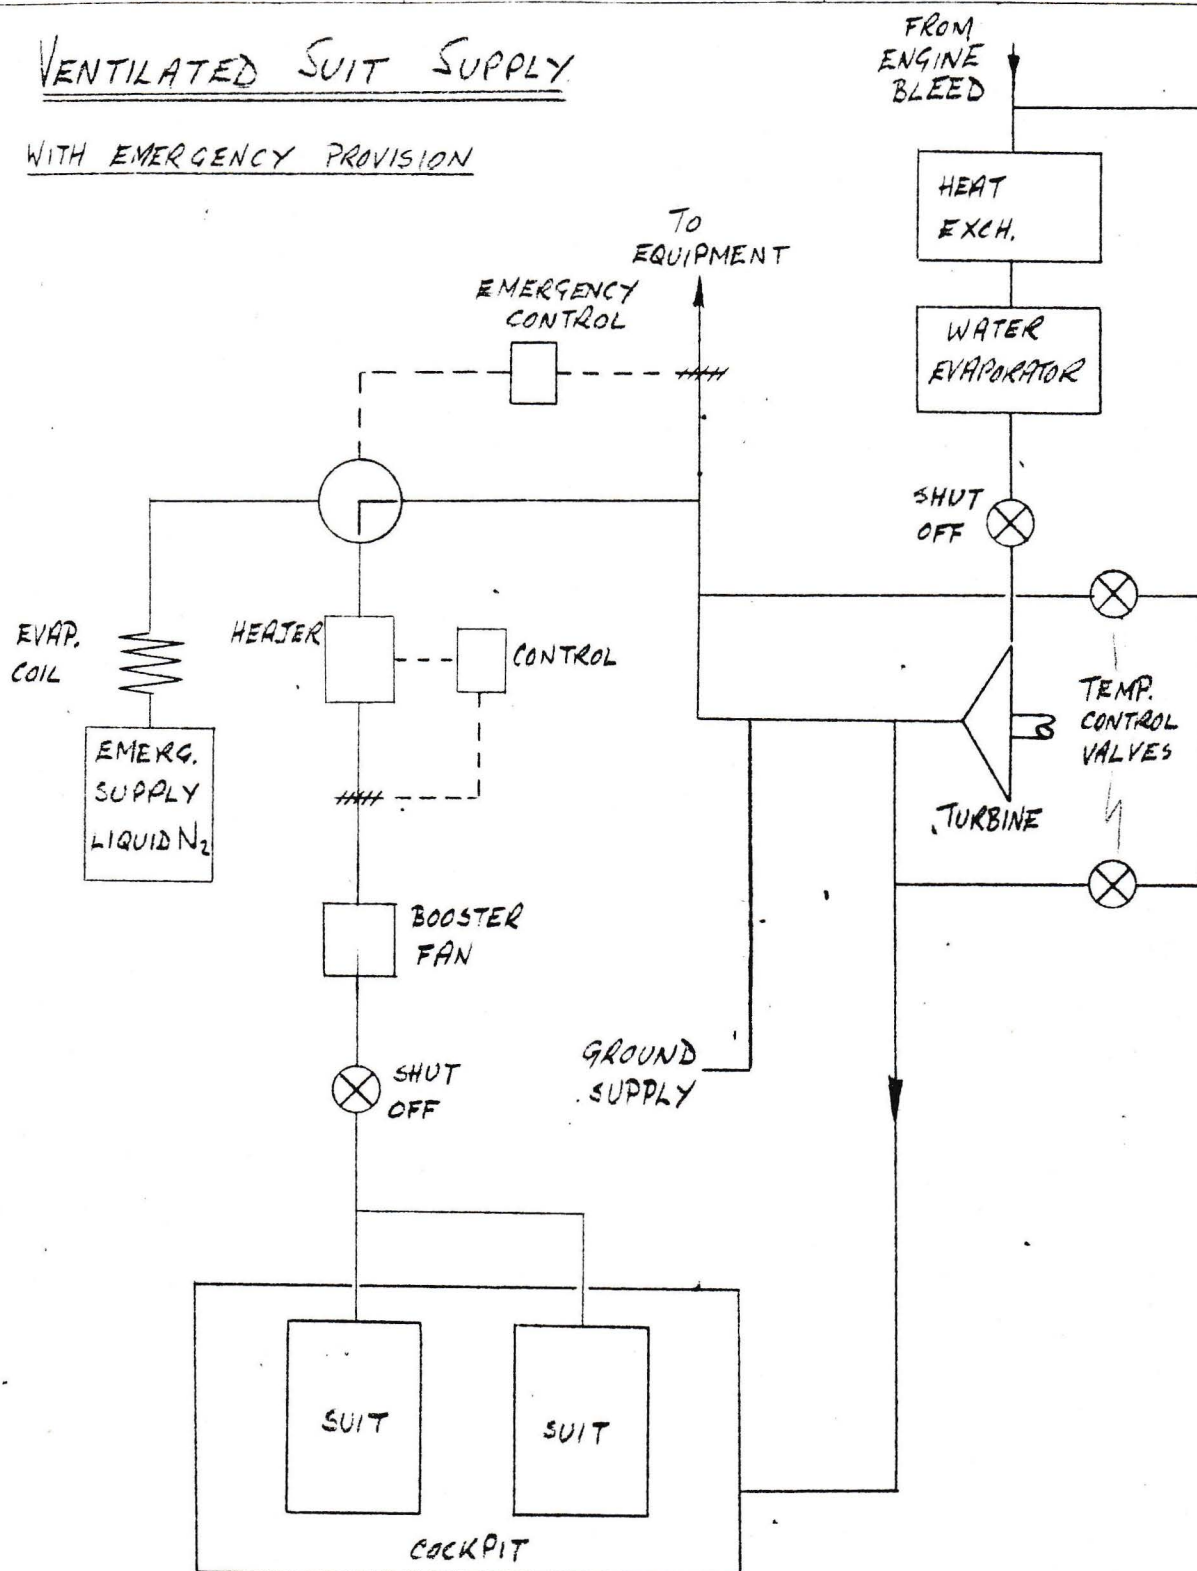



ALRO AIRCRAFT
MALTON, ONTARIO

TECHNICAL DEPARTMENT

UNCLASSIFIED

REPORT NO 72/SYSTEMS 22/170

SHEET NO FIG. 16

AIRCRAFT

ARROW 2

AIR-CONDITIONING.

PREPARED BY

A. G. LOWE.

CHECKED BY

DATE

14 APR. 58

DATE

VENTILATED & PRESSURE SUIT SUPPLY

