

TL. 113-57/07



A. V. ROE CANADA LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT (Aircraft)

AIRCRAFT: CF-105

REPORT NO. 71/SYSTEM S 13/3

FILE NO:

NO. OF SHEETS: 34

TITLE: ANTENNA EVALUATION PROGRAM, CF-105

PREPARED BY H.L. Pollock DATE July/57

CHECKED BY K.J. Keeping DATE July/57

SUPERVISED BY W. Taylor DATE July/57

APPROVED BY DATE

ISSUE NO.	REVISION NO.	REVISED BY	APPROVED BY	DATE	REMARKS



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT No. 71/Systems 13/3

SHEET No. 1

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

PREPARED BY

DATE

H.I. Pollock

July/57

CHECKED BY

DATE

INDEX

1.	INTRODUCTION.....	1
2.	GENERAL.....	2
3.	GROUND STATION EQUIPMENT	
	3.1 Antenna Installation.....	2
	3.2 UHF Field Strength Measurement.....	4
	3.3 L-band Field Strength Measurement.....	4
	3.4 Recording And Calibration.....	4
	3.5 Communication.....	5
4.	AIRBORNE EQUIPMENT	
	4.1 UHF Transmission.....	6
	4.2 L-band Transmission.....	6
	4.3 Communication.....	7
5.	EVALUATION PROCEDURE	
	5.1 Flight Plan.....	7
	5.2 Repeatability.....	8
	5.3 Development Of Measurement Techniques.....	8
	5.4 Aircraft Program.....	8
	5.5 Model Range Program.....	9
6.	CONCLUSIONS.....	11
7.	WORK SCHEDULE.....	12
	CALCULATION OF ANTENNA GAIN FUNCTION	Appendix I
	References.....	A9
	Table Of Illustrations.....	11



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 13/3

SHEET NO. 11

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

PREPARED BY

DATE

H.L. Pollock

July/57

CHECKED BY

DATE

TABLE OF ILLUSTRATIONS

- Fig. (1) Reflection From A Spherical Surface
- Fig. (2) Reflection Properties Of Fresh Water
- Fig. (3) Ground Station Antenna Gain At 226.8 Mc/s
- Fig. (4) Ground Station Antenna Gain At 277.0 Mc/s
- Fig. (5) Ground Station Antenna Gain At 324.3 Mc/s
- Fig. (6) Ground Station Antenna Gain At 384.3 Mc/s
- Fig. (7) Ground Station Recorder Indication
- Fig. (8) Ground Station System
- Fig. (9) Airborne System.

HLP/jmy



AVRO AIRCRAFT LIMITED,
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT No. 71/System 13/3

SHEET No. 1

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

PREPARED BY

DATE

H.L. Pollock

July/57

CHECKED BY

DATE

1. INTRODUCTION

This report will describe a preferred method of evaluating the UHF and L-Band antenna installation on the CF-105 aircraft and will supersede all previous reports issued by the Technical Department on this subject. In view of major revisions to flight time allocation and information recently obtained on the "state of the art", a review of all previous proposals for this program has been necessitated.

It is assumed that the necessary flight time, specifically programmed for antenna evaluation, will be allocated this project. Since space in the aircraft is at a premium, the minimum amount of airborne instrumentation required to successfully perform the evaluation program, will be employed.

Only transmitting equipment and such other equipment as may be required to monitor transmission, will be installed in the aircraft. Field strength measurements, calibration, etc. will be performed at the ground station.

The final results of this program will be a series of antenna coverage diagrams obtained from model range studies, but verified to within 1 db by actual flight tests.

2. GENERAL

The purpose of flight tests will be to establish verification of model range patterns for a single plane. It is assumed that if close correlation between flight test and model range data can be established for one plane, then model range patterns for complete 360° coverage will be highly representative of in-flight performance of a full scale aircraft.

It is proposed to select a location about 25 miles from the ground station, having a sufficiently good land mark that the pilot may fly over it and consistently pin point a fixed position. The pilot would then perform straight and level flights at a fixed altitude (say 4000 feet) for several headings and field strength measurements would be recorded at the ground station. The flight test results would then be compared with the model range data.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT No. 71/System 13/3

SHEET No. 2

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

PREPARED BY

DATE

H.L. Pollock

July/57

CHECKED BY

DATE

2. GENERAL Cont'd.....

It will be a requirement for this program that all flight test data be repeatable to within 1 db. In-flight pattern measurements will be repeated at least once, and on a different day, in order to ensure that atmospheric conditions and faulty equipment do not influence the data obtained.

Data will be obtained for several frequencies within each of the UHF and L-Band spectra.

Calibration of the ground station antennas will be performed for each flight immediately before commencing pattern measurements. This will ensure that the effect of ground station lobe structure does not influence the results.

It is proposed to choose a flight path such that the Fresnel zones of interference lie in a body of water, thereby ensuring a constant ground conductivity in the significant portion of the region surrounding the ground station antenna installation.

Since fresh water, rather than sea water, is immediately available in the Toronto area, the ground station will be designed using it as a reflecting media.

3. GROUND STATION EQUIPMENT

3.1 Antenna Installation

In order to ensure that the ground station antennas provide the necessary coverage to the aircraft when it is over the test location, it is necessary to adjust the height of the isotropic UHF antenna for each frequency to be tested in that band. Only one L-Band antenna height is required since this antenna is directional and will not be affected by multipath transmission.

It is proposed to evaluate the UHF System at any three of the four frequencies, 226.8 Mc/s, 277.0 Mc/s, 324.3 Mc/s and 384.3 Mc/s; and the L-Band system at 970 Mc/s and 1060 Mc/s.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT No. 71/Systems 13/3

SHEET No. 3

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

PREPARED BY

DATE

CHECKED BY

DATE

3.1 Antenna Installation Cont'd...

The procedure for determining the correct ground station heights for the UHF isotropic antenna is detailed in Appendix I.

Table I gives the value of $g(\theta)$, the earth gain factor for surface distances between aircraft and ground station ranging from 15-35 miles.

Table I - Ground Station Antenna Gain

f = 226.8 Mc/s Station Height 39.214'		f = 277.0 Mc/s Station Height 32.120'	
d (miles)	g (θ)	d (miles)	g (θ)
15.151	0.7760	15.123	0.7819
17.678	1.1133	17.646	1.1070
20.206	1.3862	20.168	1.3887
22.729	1.5366	22.692	1.5261
25.266	1.5900	25.217	1.5901
27.798	1.6061	27.743	1.6100
30.331	1.5778	30.271	1.5793
32.867	1.5263	32.800	1.5081
35.405	1.4640	35.331	1.4644

f = 324.3 Mc/s Station Height 27.408'		f = 384.3 Mc/s Station Height 23.096'	
d (miles)	g (θ)	d (miles)	g (θ)
15.105	0.7807	15.089	0.7704
17.624	1.1154	17.605	1.1070
20.144	1.3835	20.121	1.3870
22.664	1.5254	22.638	1.5264
25.185	1.5903	25.156	1.5904
27.707	1.6097	27.765	1.0110
30.231	1.5792	30.195	1.5802
32.756	1.5275	32.716	1.5283
35.283	1.4669	35.328	1.4657

* See Appendix I



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/SYSTEMS 13/3

SHEET NO. 4

AIRCRAFT:	CF-105	ANTENNA EVALUATION PROGRAM, CF-105	PREPARED BY	DATE
			H.L. Pollock	July/57
			CHECKED BY	DATE

3.1 Antenna Installation Cont'd....

The reflection coefficients for fresh water are given in the graph of figure (2). It should be noted that the reflection coefficients in this case are independent of frequency over the UHF L-band regions.

Figures (3), (4), (5) and (6) give the ground station gain for the test frequencies over the range 15-35 miles. It is clear that maximum gain is obtained over the range 25.5 to 29 miles in all cases. Test flights should be conducted at a distance along the ground of 27.5 to 28.0 statute miles for best results.

3.2 UHF Field Strength Measurement

UHF field strength will be measured using the receiver section of Radio Set AN/GRT-3. In this equipment, a jack is provided to permit the measurement of AVC voltage. The equipment is so designed that the AVC voltage output is directly proportional to the logarithm of the R.F. voltage input. AVC voltage is thus a measure of relative field intensity.

3.3 L-band Field Strength Measurement

It is proposed to operate an APX-6, installed in the aircraft as an L-band pulsed transmitter. An APX-6, modified as stated below, will be used at the ground station as the L-band receiver. An output from the last I.F. stage will be fed to a slide-back voltmeter (a slide-back voltmeter indicates peak voltage) which has previously been calibrated for the pulse repetition frequency and width of the transmitted signal. The voltmeter reading will then be proportional to field intensity.

Measurements Corporation Model 67, Slide-back Voltmeter will adequately fulfill the requirements for this program.

3.4 Recording And Calibration

The UHF and L-band field strength measurements will be recorded on chart type recorders and system operation will be monitored continuously throughout the flight.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT No. 71/Systems 13/3

SHEET No. 5

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

PREPARED BY

DATE

H.L. Pollock

July/57

CHECKED BY

DATE

3.4 Recording And Calibration Cont'd....

The check-point, the aircraft is approaching at an attitude different from straight and level flight, the recorder will indicate a wavy field strength pattern due to shielding effects of the aircraft as the pilot attempts to properly orient it. On the other hand, if the aircraft is approaching the check-point at a straight and level attitude, the recorder will indicate a constant field strength pattern and the measurement at the check-point is then valid.

Figure (7) illustrates a typical recorder pattern for the above situations. Ground station equipment will be calibrated for relative field intensity by simulating antenna signals with appropriate signal generators before and after each flight.

For each flight, prior to commencing evaluation tests, the aircraft will fly radially from the ground station passing over and beyond the check-point, transmitting continuously on UHF. Transmission will also be made for several other headings in the region of the check-point. Field strength readings for the above will be recorded.

If the maximum lobe of the UHF antenna does not occur at the check-point and surrounding region, the antenna height will be adjusted and this procedure repeated until the fault is corrected.

It should be noted that the ground station is so designed that the antenna lobe maximum is sufficiently broad as to minimize errors in field strength measurement which are caused by inaccuracies in locating the ground check-point.

A system diagram for the ground station is given in figure (8)

3.5 Communication

The transmitter section of AN/GRT-3 and the Stoddart UHF receiver will be used for normal communication with the aircraft. In addition, it is suggested that a telephone line hook-up be established with the Avro plant.

A separate UHF antenna will be required for communication purposes.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 13/3

SHEET NO. 6

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

PREPARED BY

DATE

H.L. Pollock

July/57

CHECKED BY

DATE

4. AIRBORNE EQUIPMENT

4.1 UHF Transmission

UHF transmission will be accomplished using the AN/ARC-34 or equivalent. This equipment is presently installed for normal UHF communication purposes. As the aircraft approaches the region of the check-point, the pilot will depress the press-to-talk button and ground station measurements will be recorded.

A suitable monitor will be installed in the aircraft and the pilot will be required to check and record the output power at various times throughout the flight.

4.2 L-Band Transmission

L-Band transmission will be accomplished using the AN/APX-6, modified as follows. The modulator delay line should be replaced by a line having twice the delay of the present component. This will enable transmission of one pulse, two microseconds width, rather than the present transmission of one pulse, one microsecond width.

It is necessary to transmit at a pulse repetition frequency of the order of several thousand pulses per second in order to present a usable signal level at the ground station. This may be accomplished by connecting a suitable pulse generator to the "BM TRIGGER" input of the AN/APX-6. A push button control should be provided for activation of the pulse generator. At the appropriate time, the pilot would then depress the button and L-Band transmission would commence.

As in the case of UHF transmission, a suitable power monitor will be installed in the aircraft and the pilot will be required to check and record the output power at various times throughout the flight.

A block diagram of the airborne system is given in figure (9).



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT No. 71/Systems 13/3

SHEET No. 7

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

PREPARED BY

DATE

H.L. Pollock

July/57

CHECKED BY

DATE

4.3 Communication

Since aircraft installation space is at a premium, normal communications and UHF field strength measurement will be accomplished using the same equipment. The pilot will transmit signals for measurement purposes only for short periods of time when approaching the region of the ground check-point, during which time it will not be possible for him to receive other communications. It is felt that this will not endanger the mission, since time of transmission is relatively short.

5. EVALUATION PROCEDURE

5.1 Flight Plan

Prior to commencing field strength measurements for each flight, the aircraft will fly radially from the ground station, passing over and beyond the check-point, transmitting continuously on UHF. Straight and level flights for several other headings passing over the check-point will also be required. Calibration of the ground station will be accomplished as previously indicated.

When the ground station has been satisfactorily adjusted, field strength measurements will be made for straight and level flight over the check-point at twelve headings spaced 30° apart. It is proposed to measure both UHF and L-Band field strengths concurrently, however, if interference problems should arise, UHF and L-Band measurements will be measured consecutively.

Three UHF frequencies and two L-Band frequencies will be tested.

A certain amount of pilot training will be required in order to properly orient the aircraft in a straight and level flight over the check point. The flight procedure is similar to Radio Compass procedures.

Each pattern will be checked at least once and on a different day, in order to establish repeatability.



AVRO AIRCRAFT LIMITED
MALTON, ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 13/3

SHEET NO. 8

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

PREPARED BY

DATE

H.L. Pollock

July/57

CHECKED BY

DATE

5.2 Repeatability

For each frequency tested, patterns taken on different days must agree within 1 db in order for repeatability to be satisfactorily established.

When this has been done, these patterns will be checked against model range data for the same plane. If there is agreement between in-flight and model range data to within 1 db, the model range data will be accepted as the final pattern for the antenna in question. If model data is not in agreement with flight data, it will be necessary to repeat model range measurements in order to establish the necessary correlation.

5.3 Development Of Measurement Techniques

The major advantage in using the above method for antenna evaluation, is that the flight time requirements for the CF-105 are minimized. It would appear most desirable, therefore, to perfect measurement techniques well in advance of scheduled tests for the CF-105. In order to develop the necessary pilot and ground crew skills required for successful performance of this program, it is suggested that preliminary UHF pattern measurements be made, using a CF-100 aircraft as a test vehicle.

5.4 Aircraft Program

A summary of the aircraft program is given in Table II. It should be noted that prior to commencing pattern measurements, the ground station must be calibrated as previously described in paragraph 5.1. Calibration may be performed using some other aircraft, such as the CF-100, prior to each CF-105 flight.

The data contained in Table II has been prepared under the following assumptions.

- (a) Field strength measurements for twelve headings can be accomplished in one hour of flight time, ground station calibration being performed by a separate aircraft prior to a measurement flight.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 13/3

SHEET NO. 9

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

PREPARED BY

DATE

H.L. Pollock

July/57

CHECKED BY

DATE

5.4 Aircraft Program Cont'd.....

- (b) UHF and L-Band field strength measurements can be made coincidentally. If interference problems arise, separate measurements will be made for UHF and L-Band and additional flight time will be required.
- (c) Pattern repeatability may be satisfactorily established in each case by one check-flight.
- (d) Preliminary UHF measurements using a CF-100 aircraft as a test vehicle are required in order to develop the necessary pilot and ground crew skills. Table II does not provide for these. It is estimated that 15 to 10 hours of CF-100 flight time will be required in support of this program.

From Table II, it is estimated that total CF-105 flight time required in support of this program is 15 hours. This includes a 25% safety factor which would account for equipment breakdown, aircraft malfunction, etc.

5.5. Model Range Program

A summary of the model range program associated with this project is given in Table III. The data contained in this table has been prepared under the following assumptions:

- (a) Patterns shall be measured on 1/18 scale models for both L-Band and UHF frequency bands.
- (b) UHF measurements shall be performed for three specified frequencies, on each of two antennas.
- (c) L-Band measurement shall be performed for two specified frequencies, on each of two antennas.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

REPORT NO. 71/Systems 13/3

SHEET NO. 10

PREPARED BY

DATE

H.L. Pollock

CHECKED BY

July/57
DATE

Table II - Aircraft Program For CF-105

Flight No.	Estimated Flight Time (Hours)	Frequency Of Test (Mc/s)			
		Fin Cap Area		Belly Area	
		UHF-L-Band (UHF Section)	UHF-L-Band (L-Band Section)	UHF	L-Band
1	1	226.8			970
2	1	324.3			1060
3	1	384.3			
4	1	226.8			970
5	1	324.3			1060
6	1	384.3			
7	1		970	226.8	
8	1		1060	324.3	
9	1			384.3	
10	1		970	226.8	
11	1		1060	324.3	
12	1			384.3	
Estimated Flight Time 12 Hours					
25% Safety Factor 3 Hours					
Total Flight Time 15 Hours					



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 13/3

SHEET NO. 11

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

PREPARED BY

DATE

H.L. Pollock

July/1957

CHECKED BY

DATE

5.5 Model Range Program Cont'd....

- (d) The allowable tolerance on models used for pattern measurement shall be that which permits the system accuracy for the range (± 1 db in 25 db) to be realized.
- (e) Schedules are based on a forty hour week and contain drop-out allowances.
- (f) Pattern measurements required in support of preliminary flight tests with a CF-100, are not included in Table III. It is estimated that 172 man hours are required for CF-100 model measurements and range utilization would be 30 days.

Table III - Model Range Program For CF-105

Frequency (Mc/s)	Antenna Model	Range Utiliz- ation (days)	Labour (Man-hours)
226.8 324.3 384.3	UHF Belly		
226.8 324.3 384.3	UHF Fin- cap	120	1032
970 1060	L-Band Belly		
970 1060	L-Band Fin-cap	120	860

6. CONCLUSIONS

The advantages of employing the above method for the antenna evaluation program are listed below.

- (1) Requirements for CF-105 flight time are minimized. Previous proposals required that flight tests for complete 360° coverage be performed for each antenna. This proposal requires that for each antenna, coverage for only a single



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 13/3

SHEET NO. 12

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

PREPARED BY

DATE

H.L. Pollock

July/57

CHECKED BY

DATE

6. CONCLUSIONS Cont'd.....

(1) Cont'd.

plane be measured by flight test, the entire antenna pattern then being determined by model range techniques.

- (2) Aircraft and ground system instrumentation requirements are considerably reduced by virtue of the relatively few in-flight measurements required for this program. An automatic data reduction system, as recommended for previous antenna evaluation programs, will not be required.

- (3) A substantial reduction in the overall cost of the program will be effective by virtue of the reduction in flight time requirements and complexity of instrumentation.

Previous reports *, indicated that approximately 10 hours of CF-105 flight time would be sufficient to measure the complete 360° antenna coverage pattern for that aircraft. In a recent trip to the U.S. Navy Air Test Centre, Patuxent, it was noted that the Antenna Group required some 50 hours of flight time to measure the complete coverage of one antenna. It would therefore appear that previous estimates were in error.

- (4) If, as now seems likely, the Irdome is to be installed in the fin-cap area, the model patterns and flight tests for the UHF-L-band fin antenna, would be deferred until an assessment of the effect of the Irdome on this antenna could be made. If the results of the Irdome investigation so indicate, it may be necessary to relocate the fin-cap antenna installation. When the effects of the Irdome have been investigated and suitably minimized, the UHF-L-band antenna will then be evaluated as described in this report.

7. WORK SCHEDULE

The following authorizations would be required, following approval of this proposal.

* Memo 2158/02C/j, August 31, 1956



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 13/3

SHEET No. 13

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

PREPARED BY

H.L. Pollock

DATE

July/57

CHECKED BY

DATE

Table IV - Work Schedule

Item	Description	Date Required
1	Procure slideback voltmeter, power monitors (UHF and L-band), recording meters, etc, as detailed in this report.	Sept.1, 1957
2.	Modify AN/APX-6 (GFE) for airborne installation as described in this report.	Sept.1, 1957
3.	Operate AN/GRT-3 (GFE) and check AVC characteristic for linearity.	Sept.1, 1957
4.	Modify and equip existing mobile trailer, property of Experimental Flight Test, with electrical wiring, dust filters, air conditioning, heating, work benches, etc.	Sept.15, 1957
5.	Purchase two UHF omnidirectional antennas and one telescoping mount. Purchase or fabricate one fixed mount for a UHF antenna.	Sept.15, 1957
6.	Purchase or fabricate one L-band directional antenna and mount.	Sept.15, 1957
7.	Install power monitors, AN/APX-6 (modified), etc. in CF-100 test vehicle.	Oct.1, 1957
8.	Install AN/GRT-3, AN/APX-6, recording voltmeters, etc. in the mobile trailer.	Oct.1, 1957
9.	Allocate 15 hours flight time for CF-100 test vehicle, UHF equipped, for preliminary measurements. Program to commence approximately, October 1, 1957.	Oct.1, 1957



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 13/3

SHEET NO. _____

AIRCRAFT:

CF-105

ANTENNA EVALUATION
PROGRAM, CF-105

PREPARED BY

DATE

H.L. Pollock

July/57

CHECKED BY

DATE

APPENDIX I



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 13/3

SHEET NO. A1

AIRCRAFT:

CF-105

ANTENNA
EVALUATION PROGRAM
CF-105

PREPARED BY

H. Pollock

DATE

July 195

CHECKED BY

DATE

CALCULATION OF ANTENNA GAIN FUNCTION

With reference to Fig. (1) an aircraft at A, transmits a signal to a ground station at S. Since the ground station is isotropic, it will be illuminated both by a direct ray emanating from the aircraft and a ray reflected, at an angle ψ by the earth's surface at B.

The true aircraft altitude is h_1 and the altitude referenced to the reflecting plane is h_1^* . The true height of the ground station is h_2 and the height referenced to the reflecting plane is h_2^* .

The distance measured along the surface of the earth from the point of reflection to the projection of the aircraft position on the earth's surface is d_1 . The distance measured along the surface of the earth from the point of reflection to the ground station antenna is d_2 .

The reflected ray received by the ground station may be in phase or out of phase with the direct ray causing constructive or destructive interference. It is therefore necessary to optimize the ground station height in order to minimize destructive interference for the aircraft range and altitude of greatest interest.

The method of optimizing the ground station is detailed in the literature' and is summarized briefly below.

The magnitude and phase of the reflected wave for vertical polarization is determined by

$$\frac{R}{\phi} = \frac{E_r}{E_i} = \frac{n^2 \sin \psi}{n^2 \sin \psi} \frac{-\sqrt{n^2 - \cos^2 \psi}}{+\sqrt{n^2 + \cos^2 \psi}} \text{ ----- (1)}$$



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 13/3

SHEET NO. A2

AIRCRAFT:

CF-105

ANTENNA
EVALUATION PROGRAM
CF-105

PREPARED BY

H. Pollock

CHECKED BY

DATE

July 19

DATE

where E_r and E_i are respectively the intensities of the reflected and incident beams, ψ is the angle between the incident beams and the reflecting plane, and n is the complex index of refraction of the medium.

The index of refraction between air and the reflecting medium is given by.

$$n^2 = \epsilon_r - j60\sigma\lambda \quad \text{-----}(2)$$

where ϵ_r is the relative permittivity of the reflecting surface, σ is the conductivity of the reflecting surface in mho-metres per square metre, and λ is the wavelength of the radiant energy in meters.

Values of ϵ_r and σ for average earth, sea water and fresh water are tabulated below ².

TABLE 1 - PROPERTIES OF REFLECTING MEDIA

Material	ϵ_r	σ (mho-m./sq.m.)
Sea Water	81.0	4.64
Fresh Water	81.0	0.01
Average Earth	15.0	0.015

Values of n^2 for the appropriate test frequencies and reflecting surfaces have been calculated using equation (2) and are given in Table 11.

TABLE 11 - VALUES OF n^2 FOR ANTENNA EVALUATION PROGRAM

Media	Frequency			
	226.8 Mc/s	277.0 Mc/s	324.3 Mc/s	384.3 Mc/s
Sea water	81-j370	81-j 301	81-j 258	81-j 218
Fresh water	81-j0.796	81-j 0.650	81-j 0.555	81-j 0.469
Average Earth	15-j1.19	15-j 0.975	15-j 0.834	15-j 0.703

Table 111 gives the reflection coefficients for an aircraft range 15-35 miles from the ground station at an altitude of 4000'. The reflecting medium prescribed for this test is water and since fresh water, rather than sea water, is immediately available in the Toronto area, the coefficients have been determined for that medium only.



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

AIRCRAFT:

CF-105

ANTENNA
EVALUATION PROGRAM
CF-105

REPORT NO. 71/Systems 13/3

SHEET NO. A3

PREPARED BY

H. Pollock

CHECKED BY

DATE

July 195

DATE

TABLE 111 - REFLECTION COEFFICIENT FOR FRESH WATER
UHF REGION VERTICAL POLARIZATION

ψ	R	$\angle \phi$	ψ	R	$\angle \phi$
0.25°	0.924	-180°	2.75°	0.394	-180°
0.50	0.853	-180	3.00	0.356	-180
0.75	0.788	-180	3.25	0.335	-180
1.00	0.727	-180	3.50	0.288	-180
1.25	0.670	-180	3.75	0.256	-180
1.50	0.616	-180	4.00	0.227	-180
1.75	0.566	-180	4.25	0.197	-180
2.00	0.519	-180	4.50	0.169	-180
2.25	0.475	-180	4.75	0.143	-180
2.50	0.433	-180	5.00	0.118	-180

It should be noted that reflection coefficients for fresh water are independent of frequency in the UHF region and that incident waves are shifted in phase by 180° upon reflection by that medium.

A graph of reflection coefficient versus ψ is given in Fig. (2).

Having determined the reflection coefficients the ground station characteristics are then optimized as follows.

(a) Choose d_1 and h_1 for maximum gain of the ground station antenna. In this case $d_1 = 25.0$ miles, $h_1 = 4000'$.

(b) Calculate h_1' for the above values and call it h_1' max.

$$h_1' = h_1 - \frac{d_1^2}{2} \text{ ----- (3)}$$

where h_1' , h_1 are in feet and d_1 is in miles.

(c) Calculate ψ for the above values and call it ψ max.

$$\psi = \cot^{-1} \frac{5280 d_1}{h_1'} \text{ ----- (4)}$$



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT No. 71/Systems 13/3

SHEET No. A4

AIRCRAFT:

CF-105

ANTENNA
EVALUATION PROGRAM
CF-105

PREPARED BY

H. Pollock

CHECKED BY

DATE

July 195'

DATE

(d) Phase shift due to path length difference is given by

$$\theta = \frac{1.384 \times 10^{-4} h_1' h_2' f_{mc}}{d} \text{ ----- (5)}$$

where θ is the phase shift due to path length difference in degrees, $d = d_1 + d_2$ is the total distance, in miles, along the surface of the earth between the aircraft and the ground station, and f_{mc} is the frequency in Mc/s.

For maximum gain $\theta + \phi = 360^\circ$

$$\text{i.e. } \theta + 180^\circ = 360^\circ$$

$$\theta = 180^\circ$$

For maximum antenna gain, equation (5) becomes.

$$\frac{(1.384 \times 10^{-4})(5280)d_2 h_1' \tan \psi}{d_1 + d_2} f_{mc} = 180$$

$$d_2 \text{ max} = \frac{d_1}{(1.384 \times 10^{-4})(5280)h_1' \tan \psi f_{mc} - 180} \text{ (6)}$$

Using equ'n (6) calculate $d_2 \text{ max}$ for maximum station gain

(e) Calculate h_2' ,

$$h_2' = \frac{5280 d_2}{\cot} \text{ ----- (7)}$$

(f) Calculate h_2 ,

$$h_2 = h_2' + \frac{d_2^2}{2} \text{ ----- (8)}$$



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 12/3

SHEET NO. A5

AIRCRAFT:

CF-105

ANTANNA
EVALUATION PROGRAM
CF-105

PREPARED BY

H. Pollock

DATE

July 1957

CHECKED BY

DATE

- (g) For chosen values of d_1 , h_1 and using h_2 as determined for maximum antenna gain in a defined region, determine antenna coverage as follows.

Calculate h_1' using equ'n (3).

Calculate ψ using equ'n (4).

Calculate d_2 and h_2' by solving equ'ns (7) and (8).

- (h) The divergence factor D is defined as the ratio of field strength obtained after reflection from a spherical surface to that obtained after reflection from a plane surface, the radiated power, total axial distance, and type of surface being the same in both cases, and the solid angle being a small elemental angle approaching zero.

Calculate D ,

$$D = \frac{1}{\frac{1 + 2d_1^2 d_2}{h_1' d}} \quad \text{----- (9)}$$

- (i) Calculate Θ using equ'n (5)
- (j) Determine the magnitude and phase of the reflection coefficient from the graph of Fig (2).
- (k) Determine the earth gain factor $g_E(\Theta)$

$$g(\Theta) = \sqrt{1 + (DR)^2 + 2DR \cos(\Theta - \phi)} \quad \text{----- (10)}$$

where $g(\Theta)$ is the ratio of the resultant field to the free space field.

Note that $g(\Theta) = 1$ if there is no reflected ray - i.e. $g(\Theta)$ is a measure of the antenna gain taking account of the multi-path propagation.

EXAMPLE CALCULATION

$f = 226.8 \text{ Mc/s}$

$h_1 = 4000'$

We will maximize the antenna gain at $d_1 = 25.0 \text{ miles}$.



AVRO AIRCRAFT LIMITED
MALTON, ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 13/3

SHEET NO. A6

AIRCRAFT:

CF-105

ANTENNA
EVALUATION PROGRAM
CF-105

PREPARED BY

H. Pollock

CHECKED BY

DATE

July 1957

DATE

Using equ'n (3)

$$h'_{1\max} = 4000 - \frac{(25.0)^2}{2} = 3687.5'$$

Using equ'n (4)

$$\psi_{\max} = \cot^{-1} \frac{5280 \times 25}{3687.5} = 1.6^\circ$$

Using equ'n (6)

$$d_{2\max} = \frac{25}{(1.384 \times 10^{-4})(5280)(3687.5)(\tan 1.6^\circ)(226.8) - 180} = 0.266 \text{ miles}$$

Using equ'n (7)

$$h'_{2\max} = \frac{5280 \times 0.266}{\cot 1.6^\circ} = 39.279'$$

Using equ'n (8)

$$h_2 = 39.279 + \frac{(0.266)^2}{2} = 39.314'$$

Having determined the characteristics for maximum antenna gain at $d_1 = 25.0$ miles and $h_1 = 4000'$, we will calculate $g(\theta)$ for $d_1 = 15.0$ miles.

Using equ'n (3)

$$h'_1 = 4000 - \frac{(15)^2}{2} = 3887.5$$

Using equ'n (4)

$$\phi = \cot^{-1} \frac{(5280)(15)}{3887.5} = 2.8^\circ$$



AVRO AIRCRAFT LIMITED
MALTON - ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 13/3

SHEET NO. A7

AIRCRAFT:

CF-105

ANTENNA
EVALUATION PROGRAM
CF-105

PREPARED BY

DATE

H. Pollock

July 1957

CHECKED BY

DATE

Using equ'ns (7) and (8)

$$\frac{d_2^2}{2} + \frac{5280 d_2}{\cot \psi} - h_2 =$$

$$0.5d_2^2 + \frac{5280 d_2}{\cot 2.8^\circ} - 39.314 = 0$$

$$0.5d_2^2 + 259.17d_2 - 39.314 = 0$$

$$d_2 = 0.151 \text{ miles.}$$

(NOTE: The other root for the above equation yields a negative value for d_2 and must therefore be discarded.)

Using equ'n (7)

$$h_2' = \frac{(5280)(0.151)}{\cot 2.8^\circ} = 39.134'$$

$$d = 15 + 0.151 = 15.151 \text{ miles.}$$

Using equ'n (9)

$$D = \frac{1}{\sqrt{1 + \frac{2(15)^2(0.151)}{(3887.5)(15.151)}}} = 0.9995$$

Using equ'n (5)

$$\Theta = \frac{(1.384 \times 10^{-4})(3887.5)(39.134)(226.8)}{25.151} = 315.4^\circ$$

From Fig. (2)

$$R/\phi = 0.382 \angle -180^\circ$$



AVRO AIRCRAFT LIMITED
MALTON, ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 13/3

SHEET NO. A8

AIRCRAFT:

CF-105

ANTENNA
EVALUATION PROGRAM
CF-105

PREPARED BY

DATE

H. Pollock

July 195

CHECKED BY

DATE

Using equ'n (10)

$$g(\theta) = \sqrt{1 + (0.9995 \times 0.382)^2 + 2(0.9995)(0.382) \cos(315.4 + 180)}$$
$$g(\theta) = 0.7760$$

The above method was used for calculation of all antenna patterns for this report.



AVRO AIRCRAFT LIMITED
MALTON, ONTARIO

TECHNICAL DEPARTMENT

REPORT NO. 71/Systems 13/3

SHEET NO. A9

AIRCRAFT:

CF-105

**ANTENNA
EVALUATION PROGRAM
CF-105**

PREPARED BY

DATE

H. Pollock

July 1957

CHECKED BY

DATE

REFERENCES

1. Henry R. Reed and Carl M. Russell, "Ultra High Frequency Propagation", John Wiley and Sons, Inc., 1953, pp 58 - 116.
2. Ibid, p. 84.

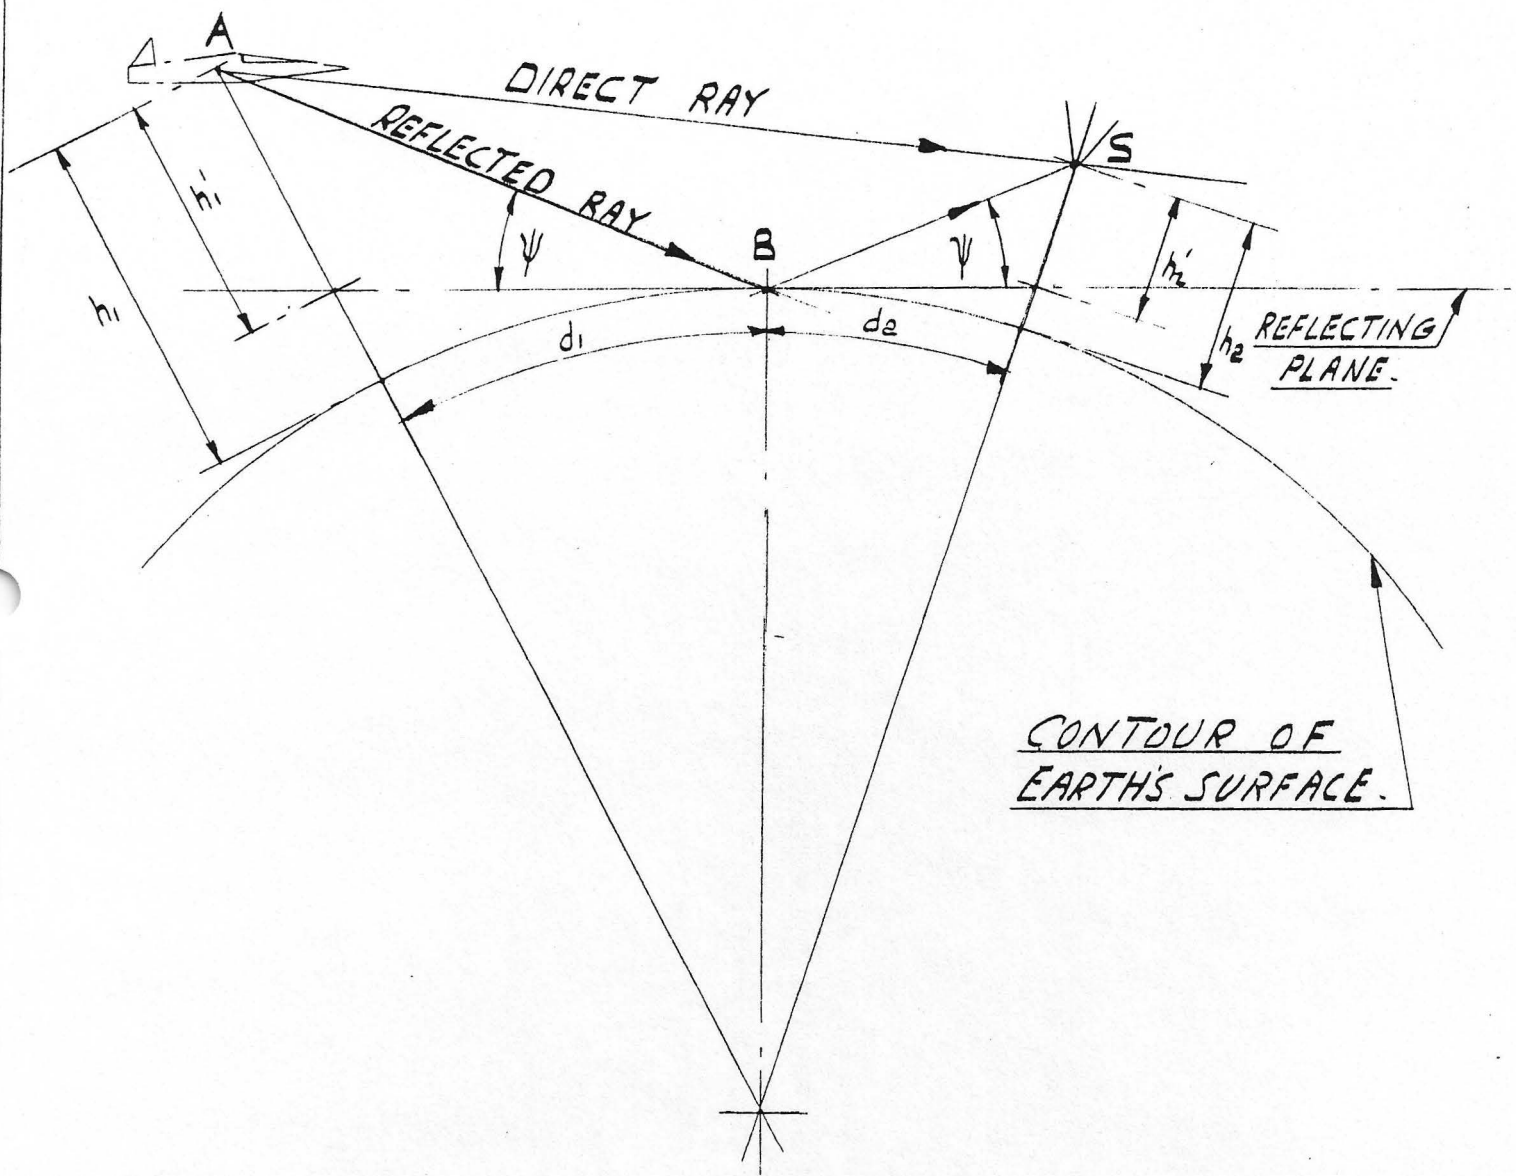



FIG 1. REFLECTION FROM A SPHERICAL SURFACE.

YEM

REFLECTION PROPERTIES OF FRESH WATER


UHF-L BAND REGION


REFLECTION ANGLE = 180° LAG

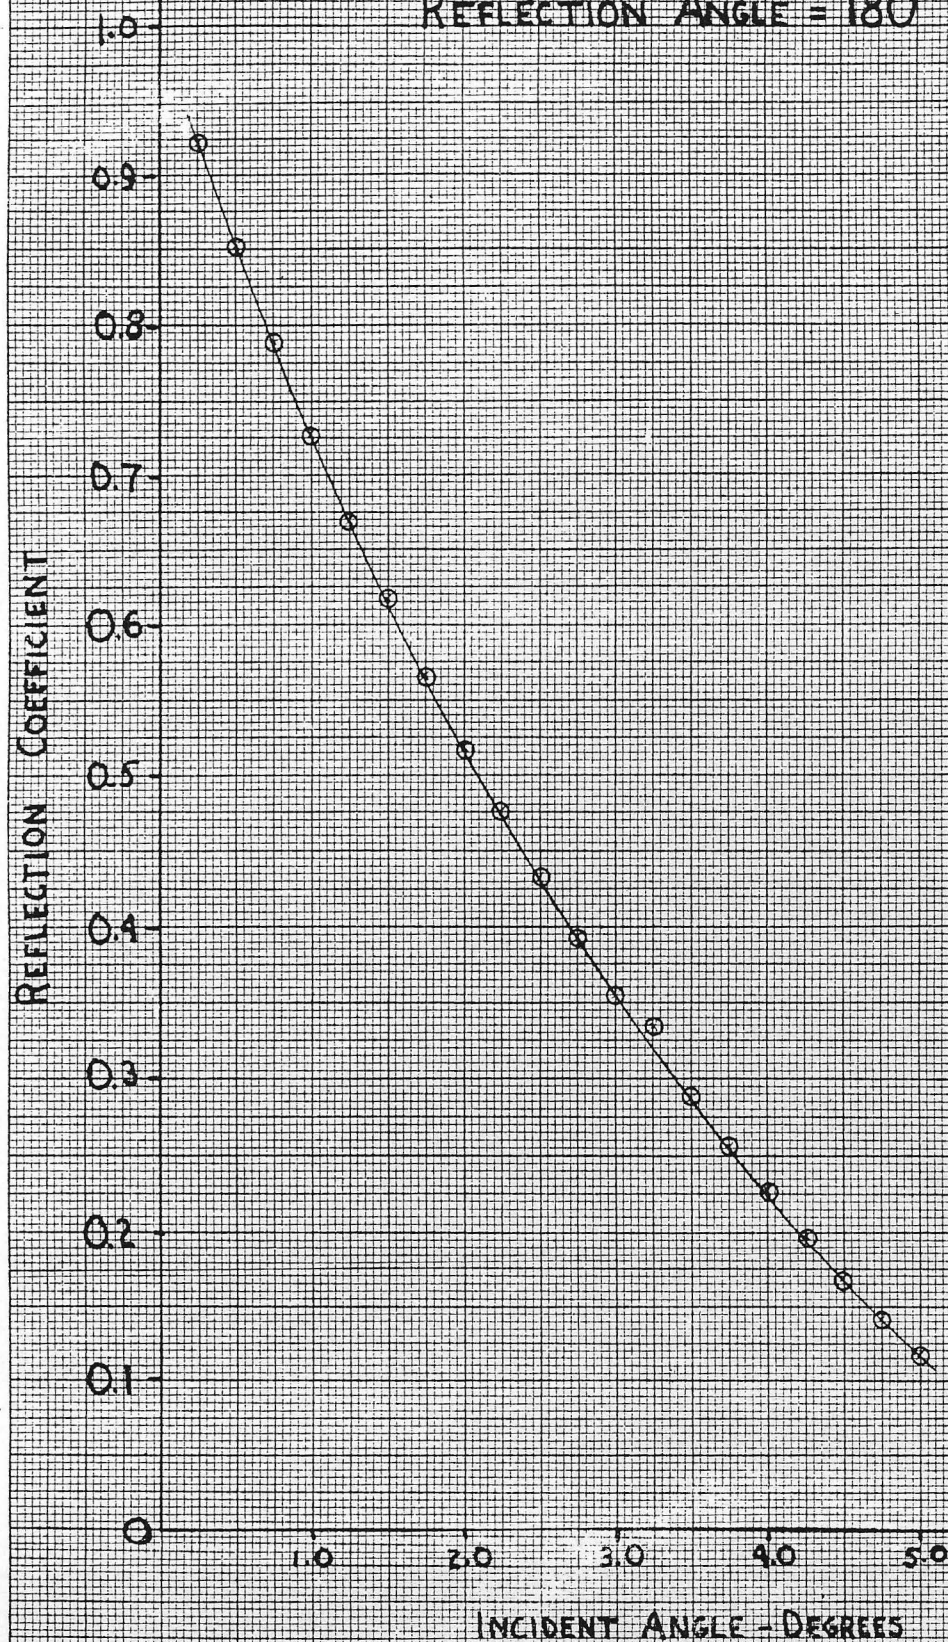


MLP
7-12-58

Fig. (2)

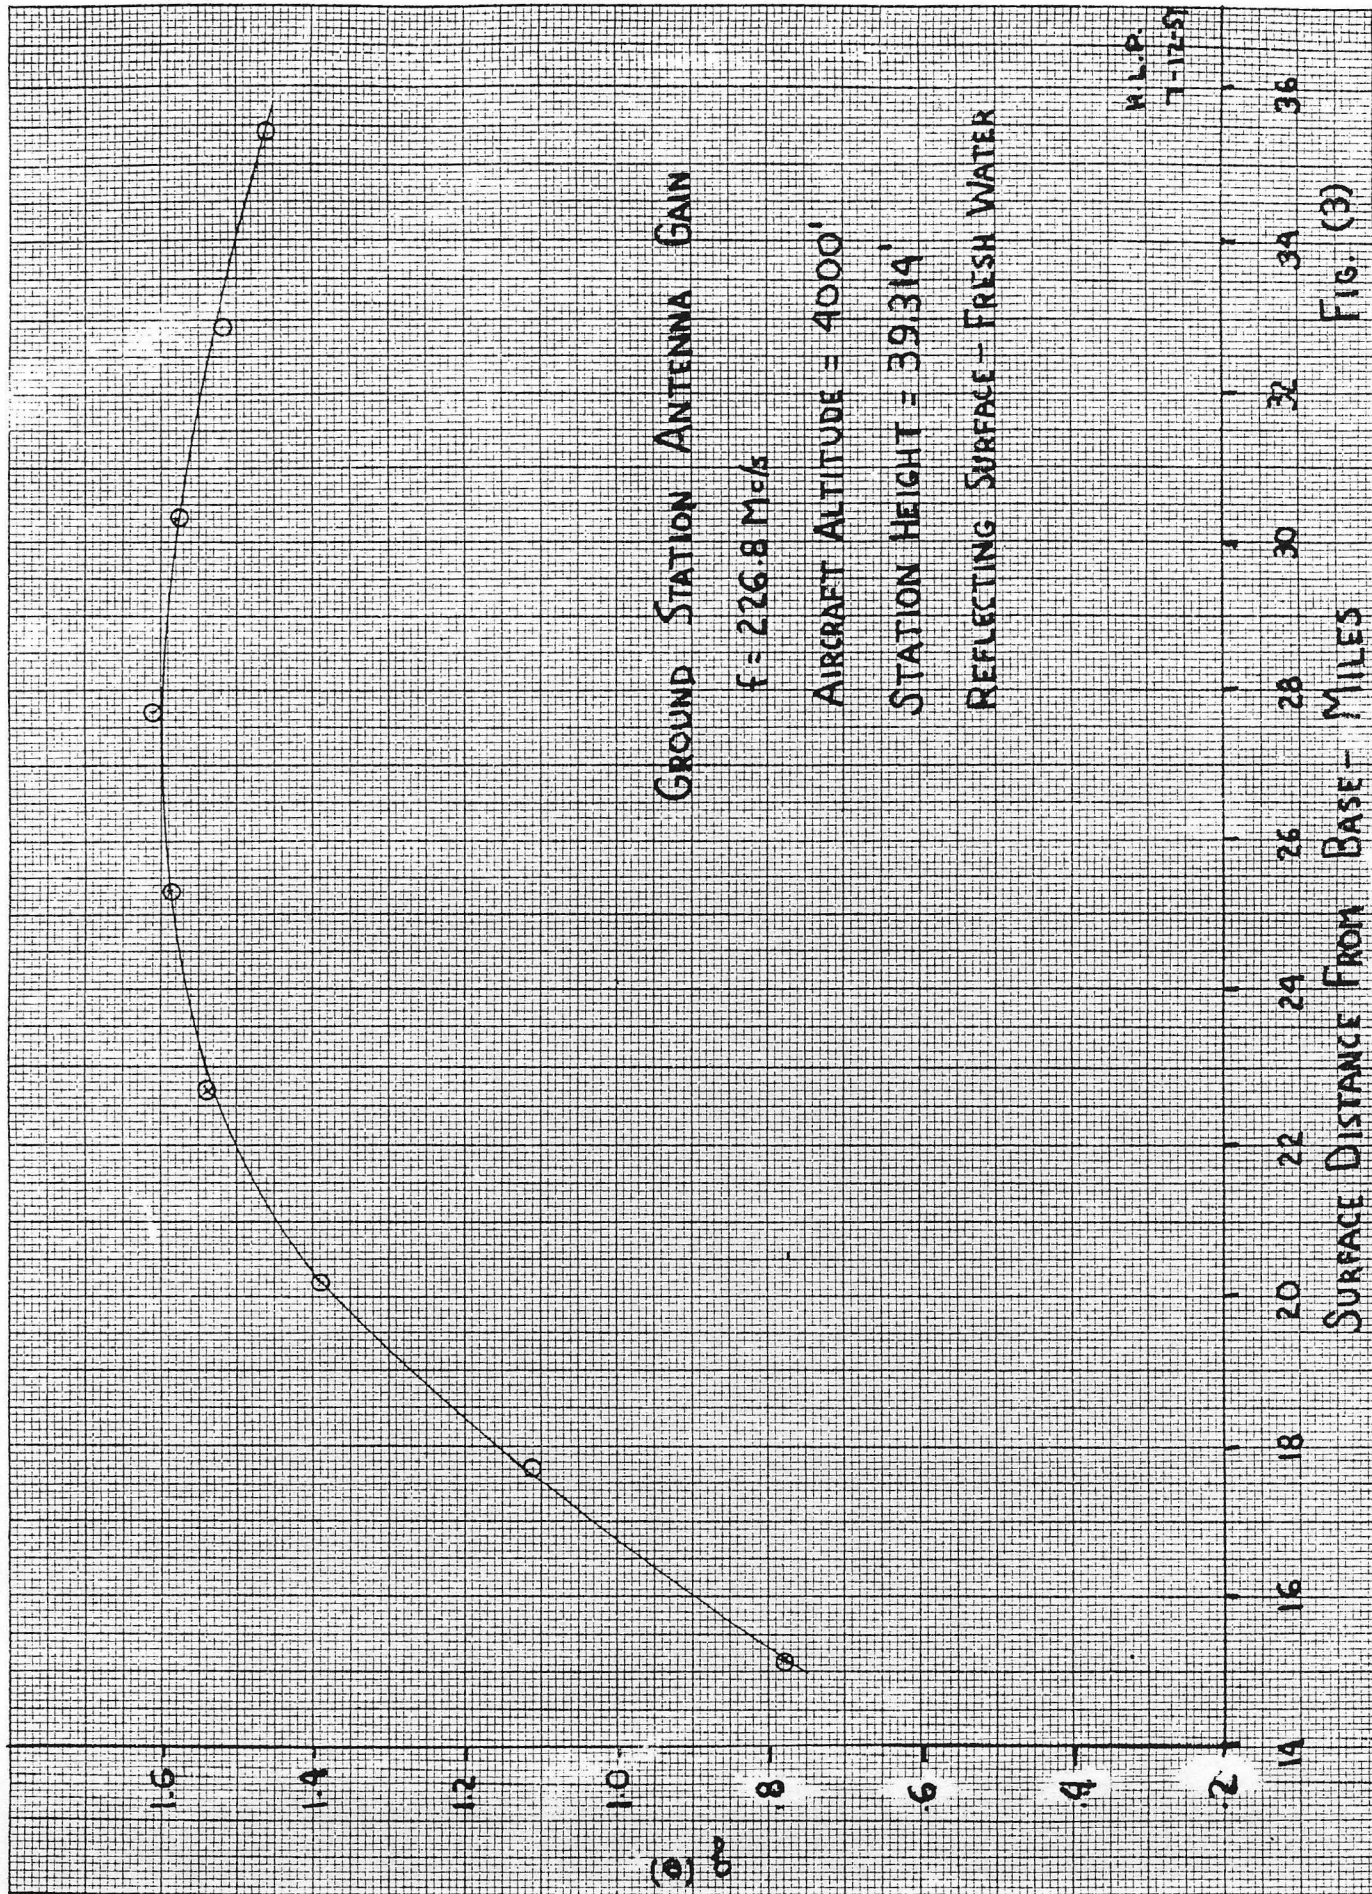

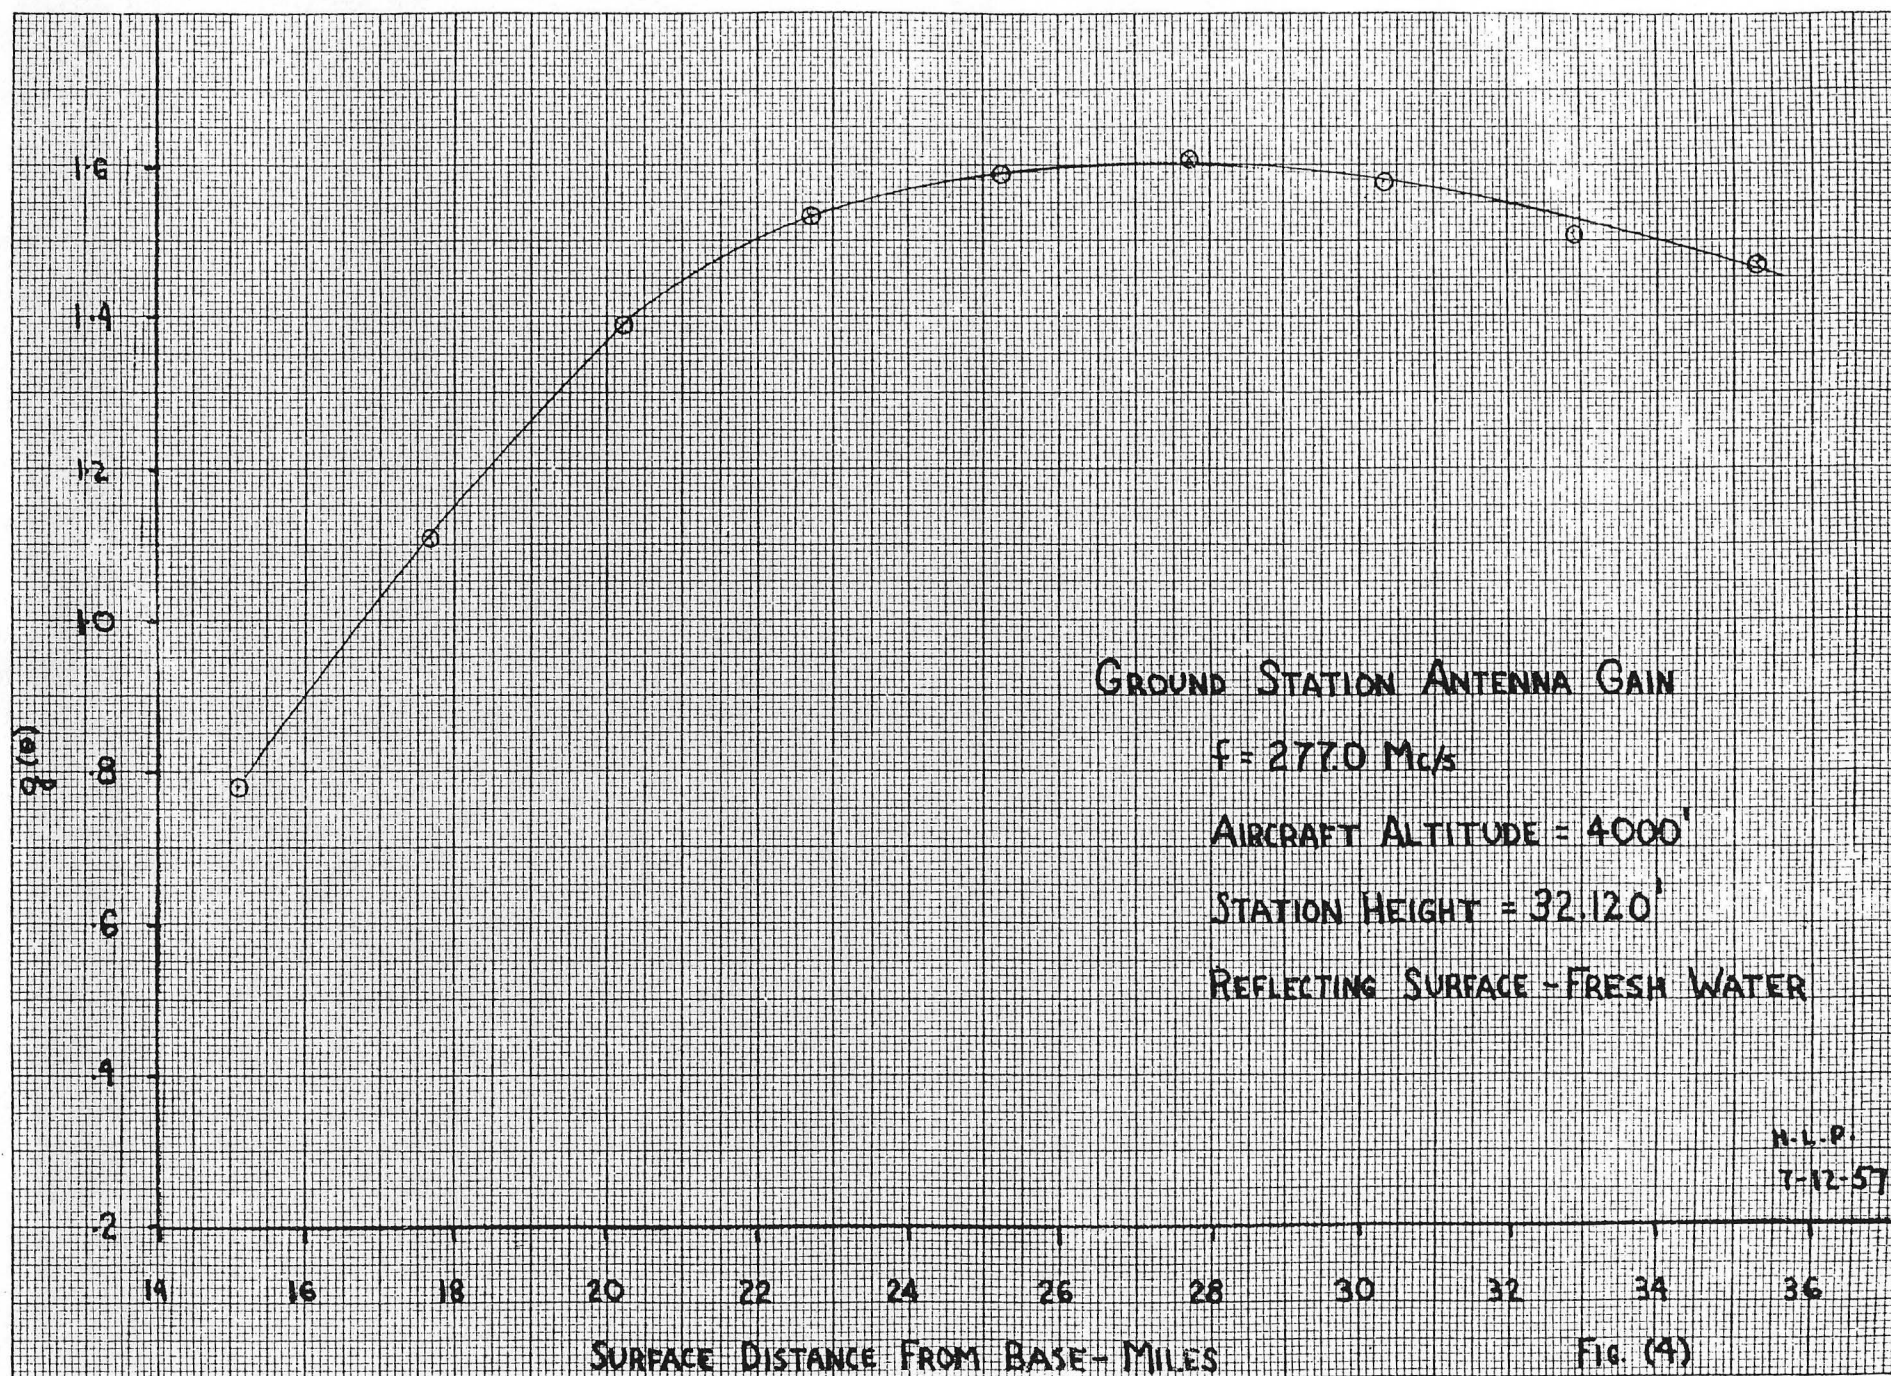

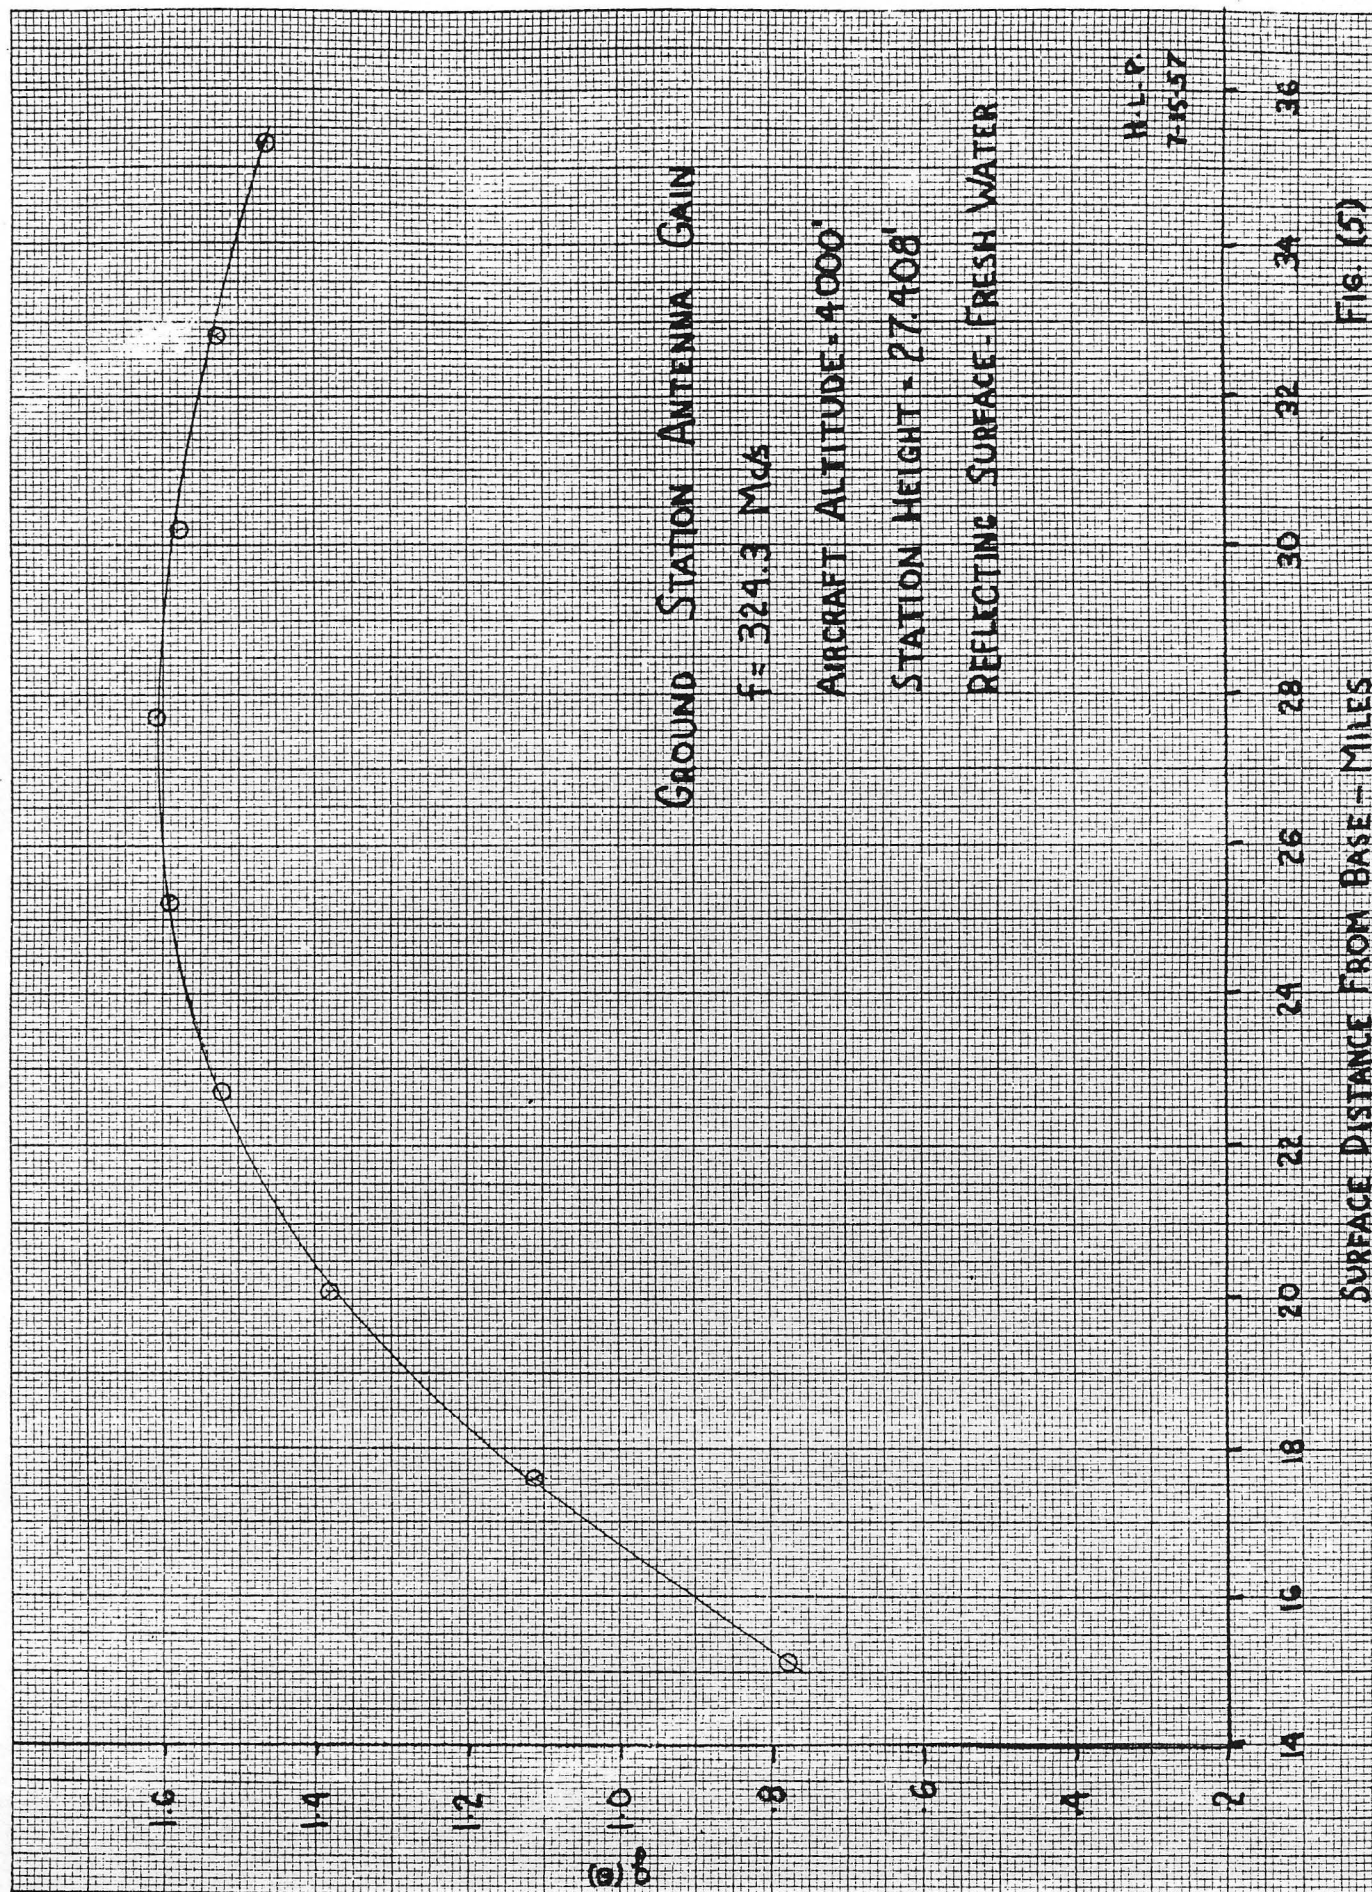

GROUND STATION ANTENNA GAIN

$f = 324.3 \text{ Mc/s}$

AIRCRAFT ALTITUDE - 4000'


STATION HEIGHT - 27.408'


REFLECTING SURFACE - FRESH WATER

H.L.P.
7-15-57


SURFACE DISTANCE FROM BASE - MILES

FIG. (5)

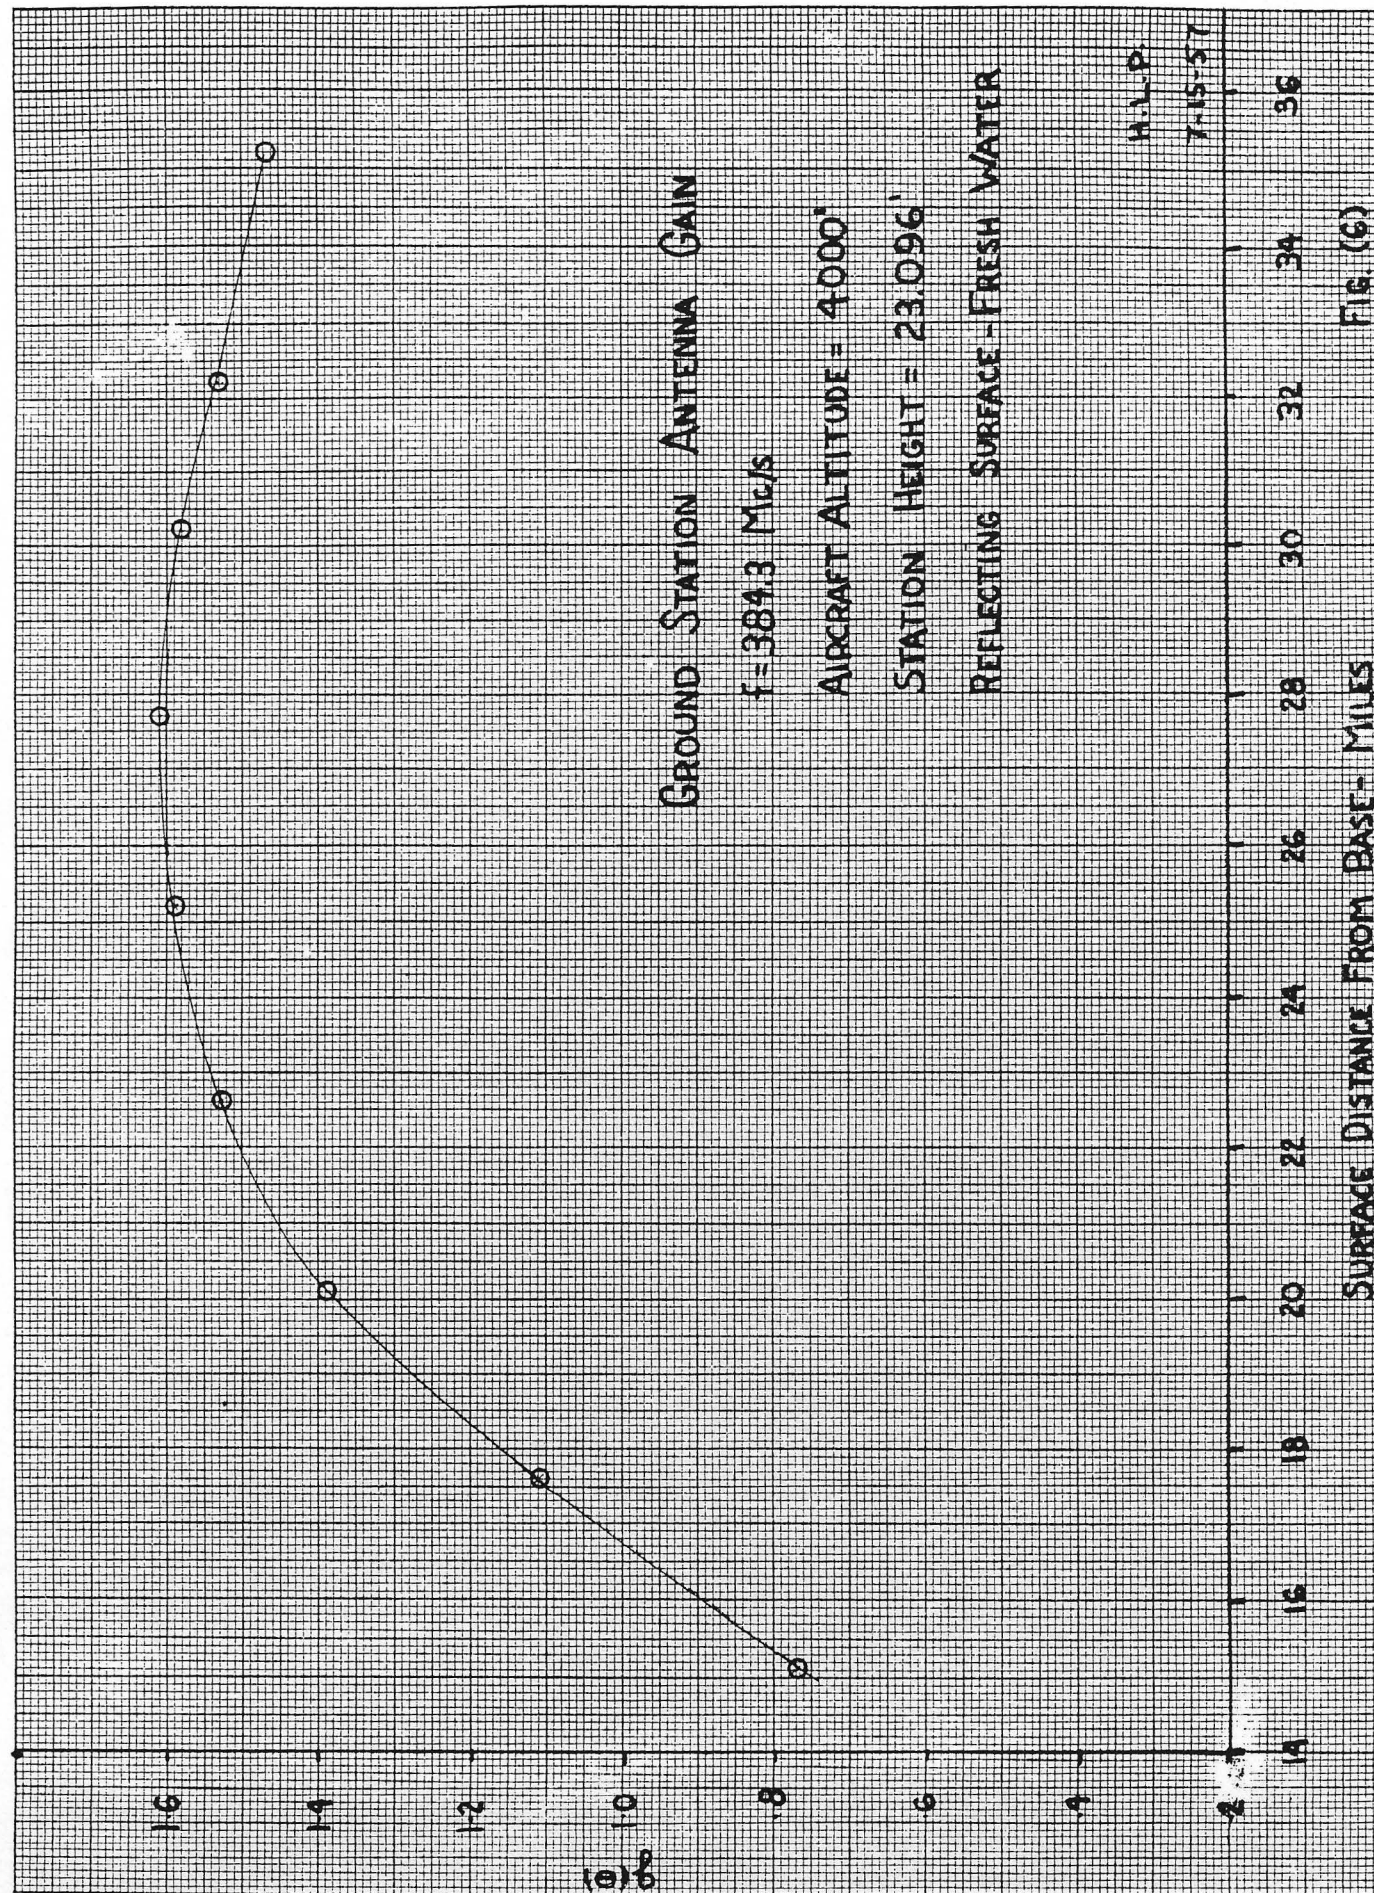

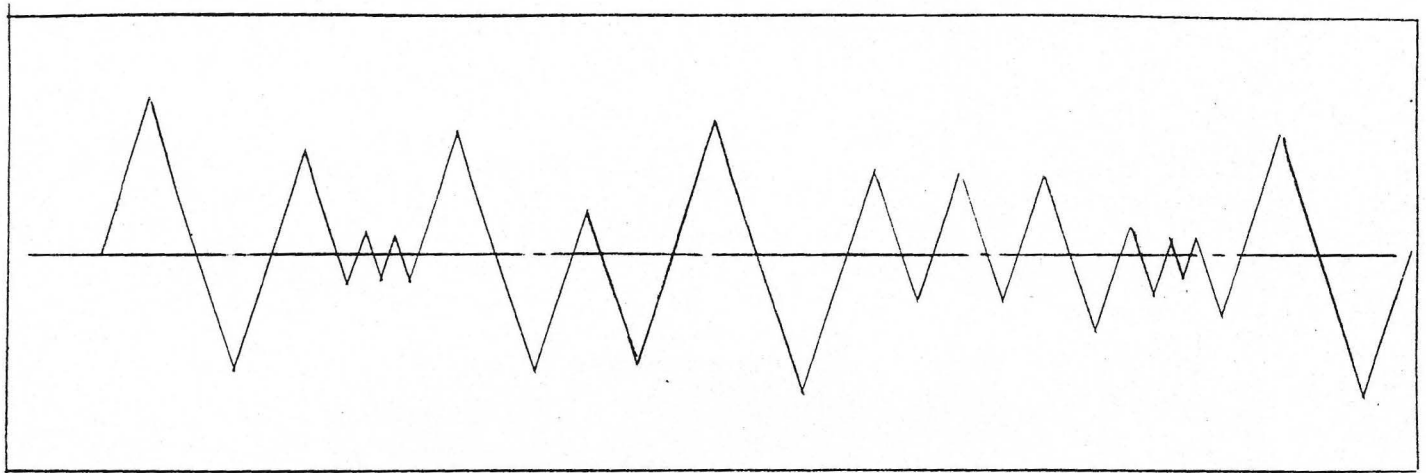

(a) AIRCRAFT APPROACHING. CHECK POINT AT ATTITUDE OTHER THAN STRAIGHT & LEVEL. (REJECT READING)

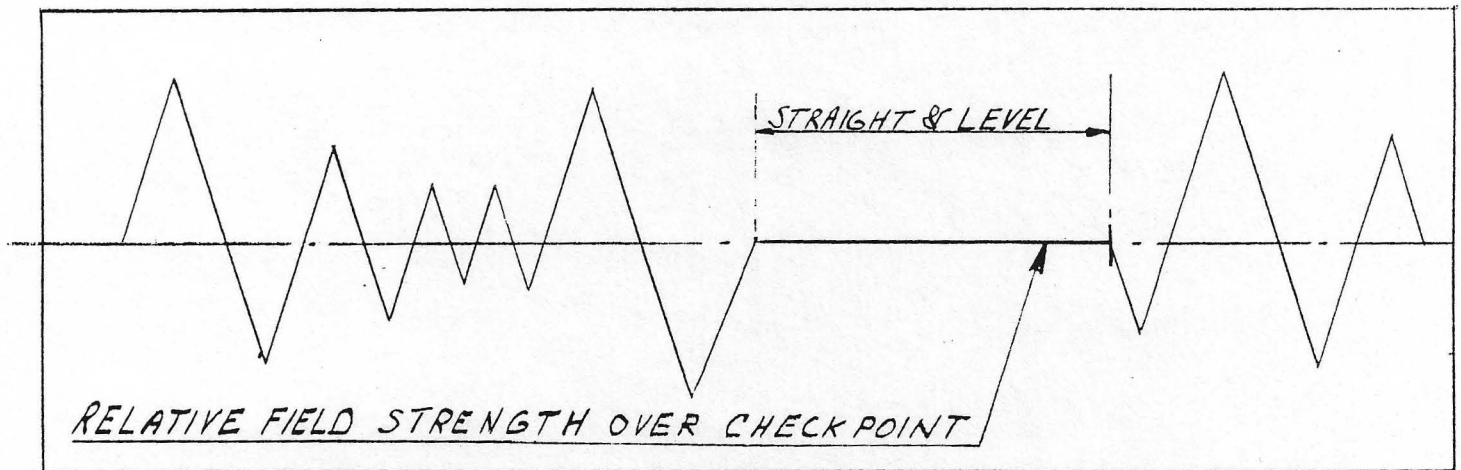

(b) AIRCRAFT IN STRAIGHT & LEVEL FLIGHT OVER CHECKPOINT.

FIG 7 GROUND STATION RECORDER INDICATION.

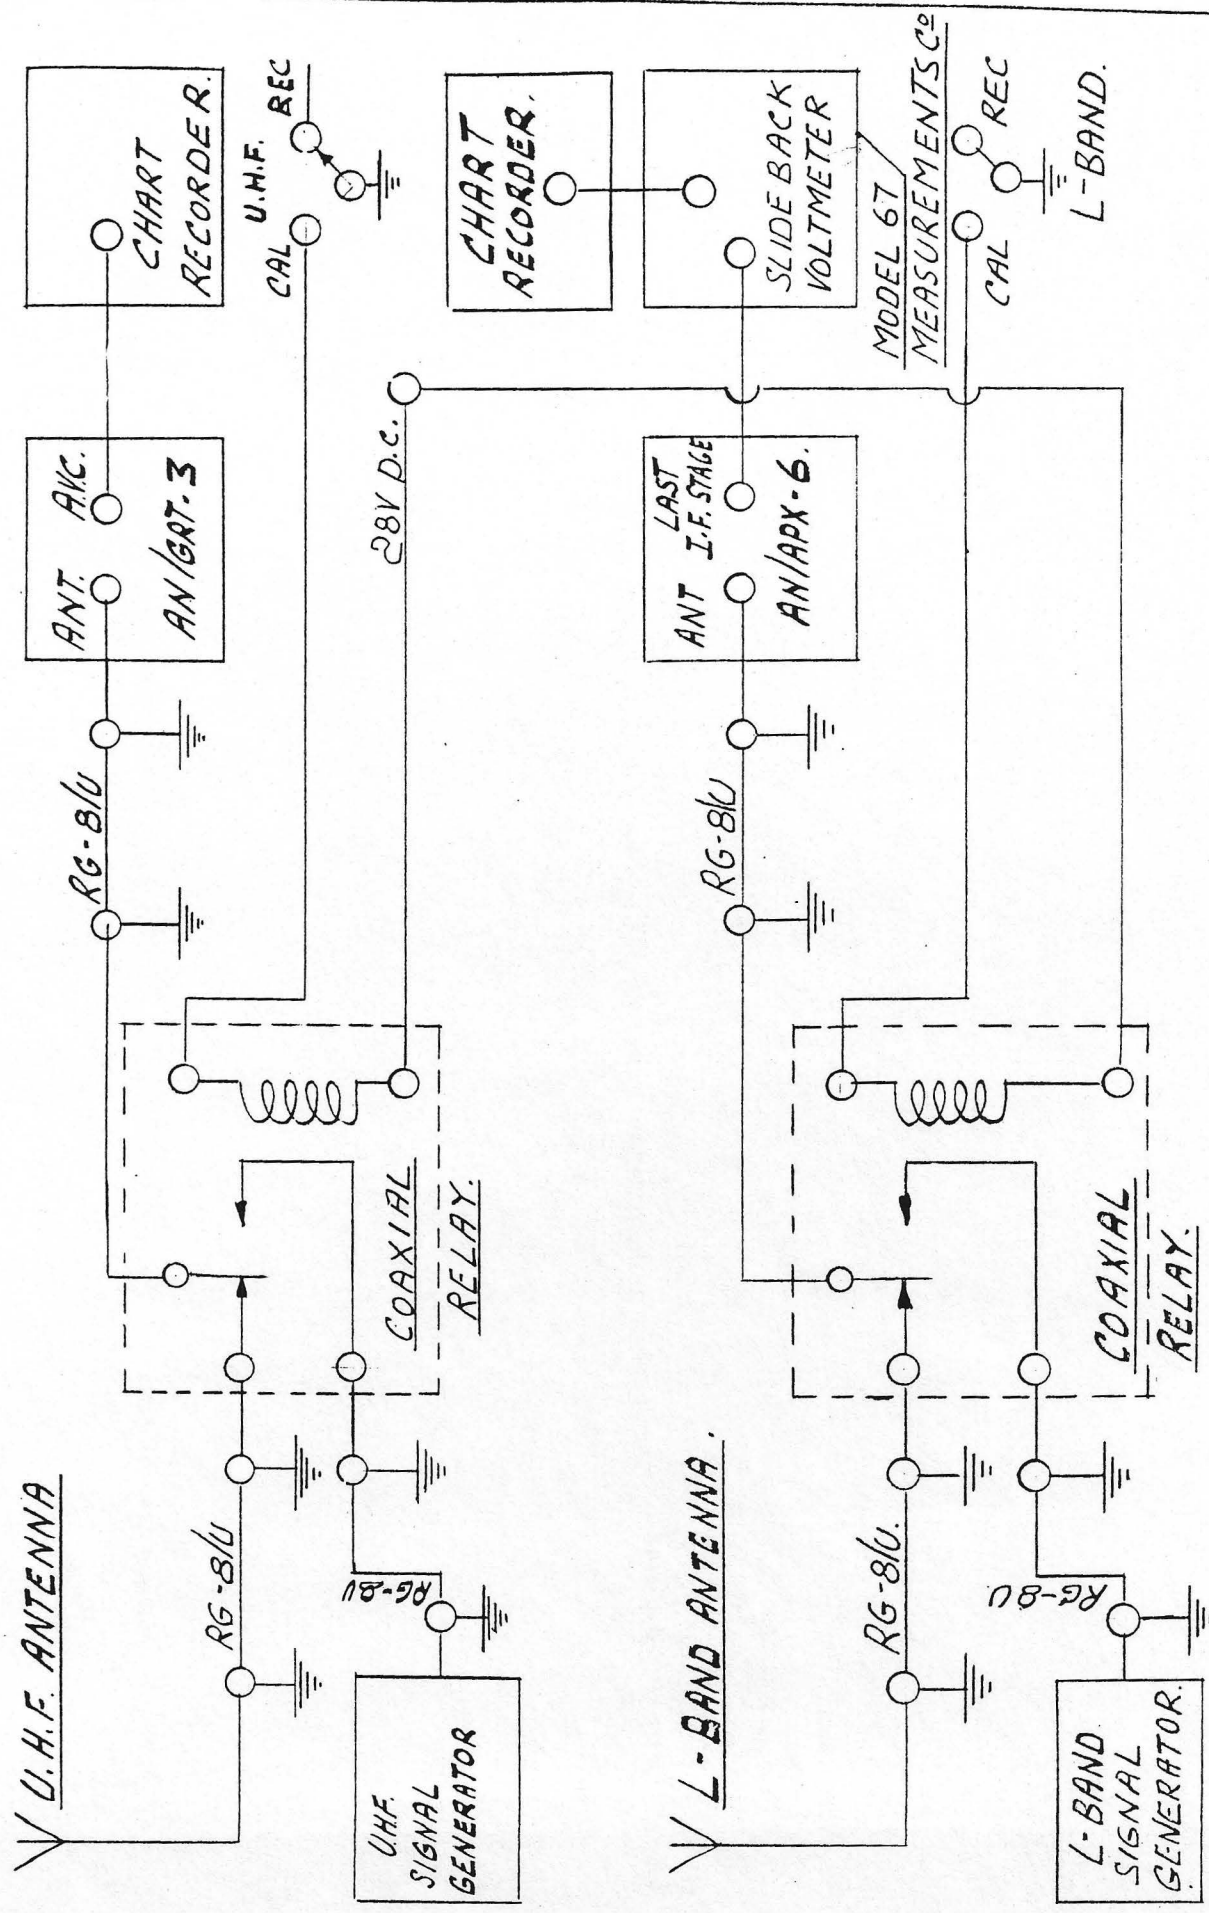


FIG 8 GROUND STATION SYSTEM.

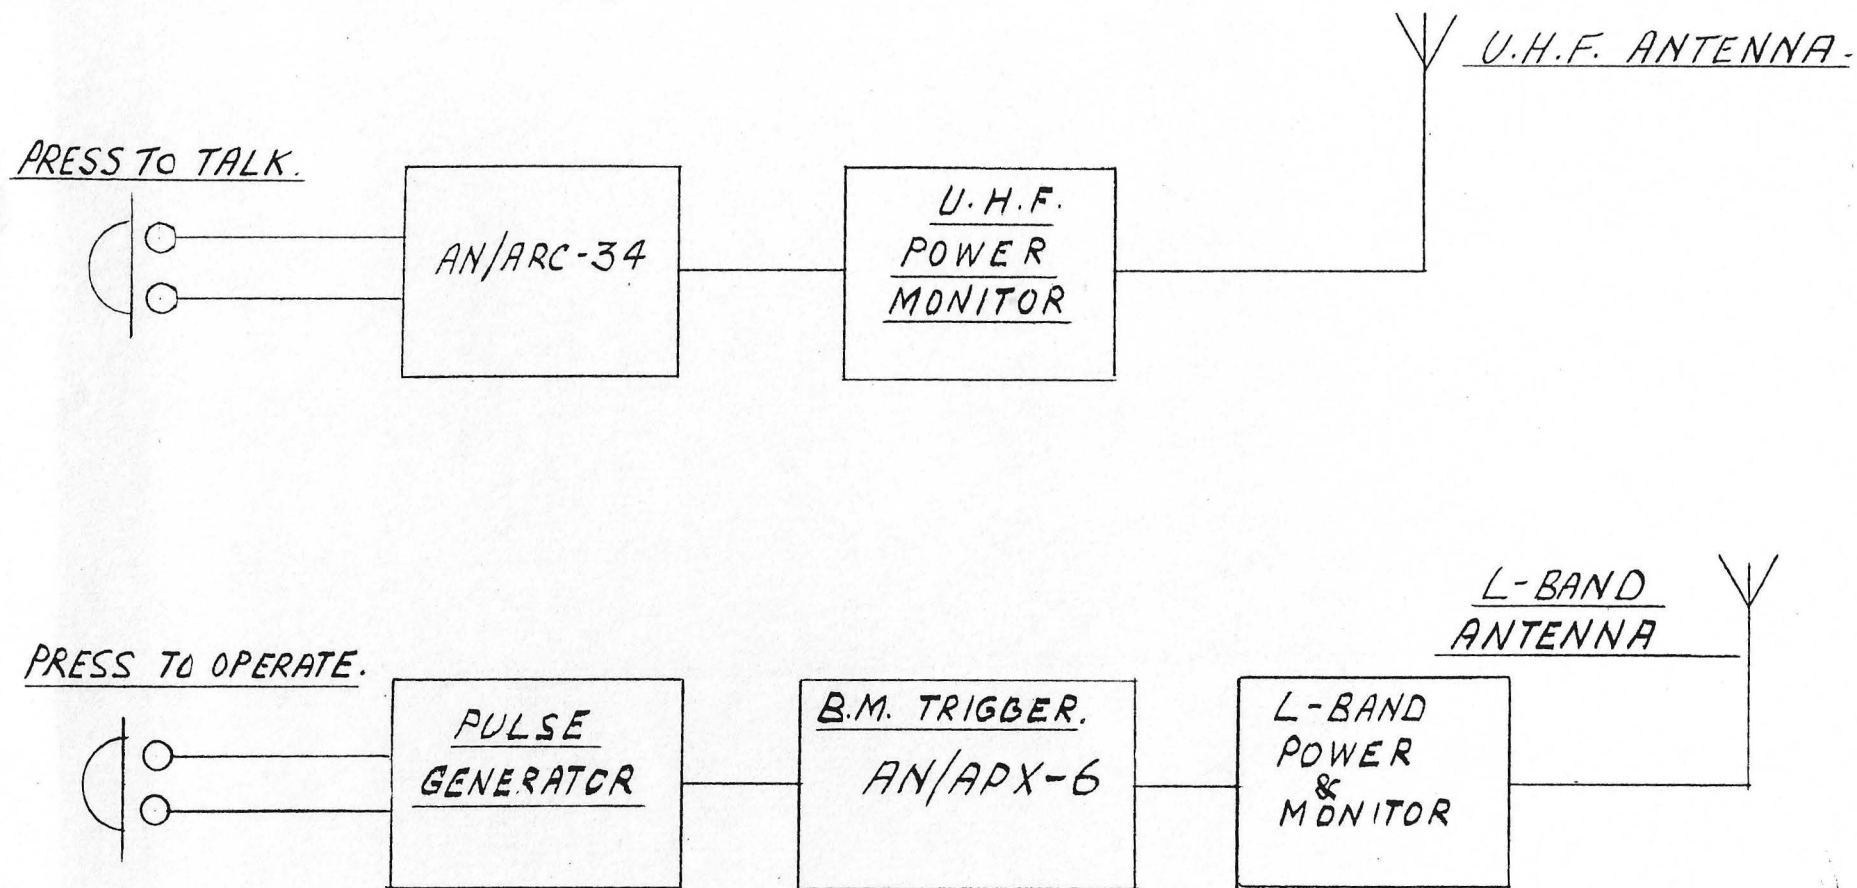


FIG. 9. AIRBORNE SYSTEM