


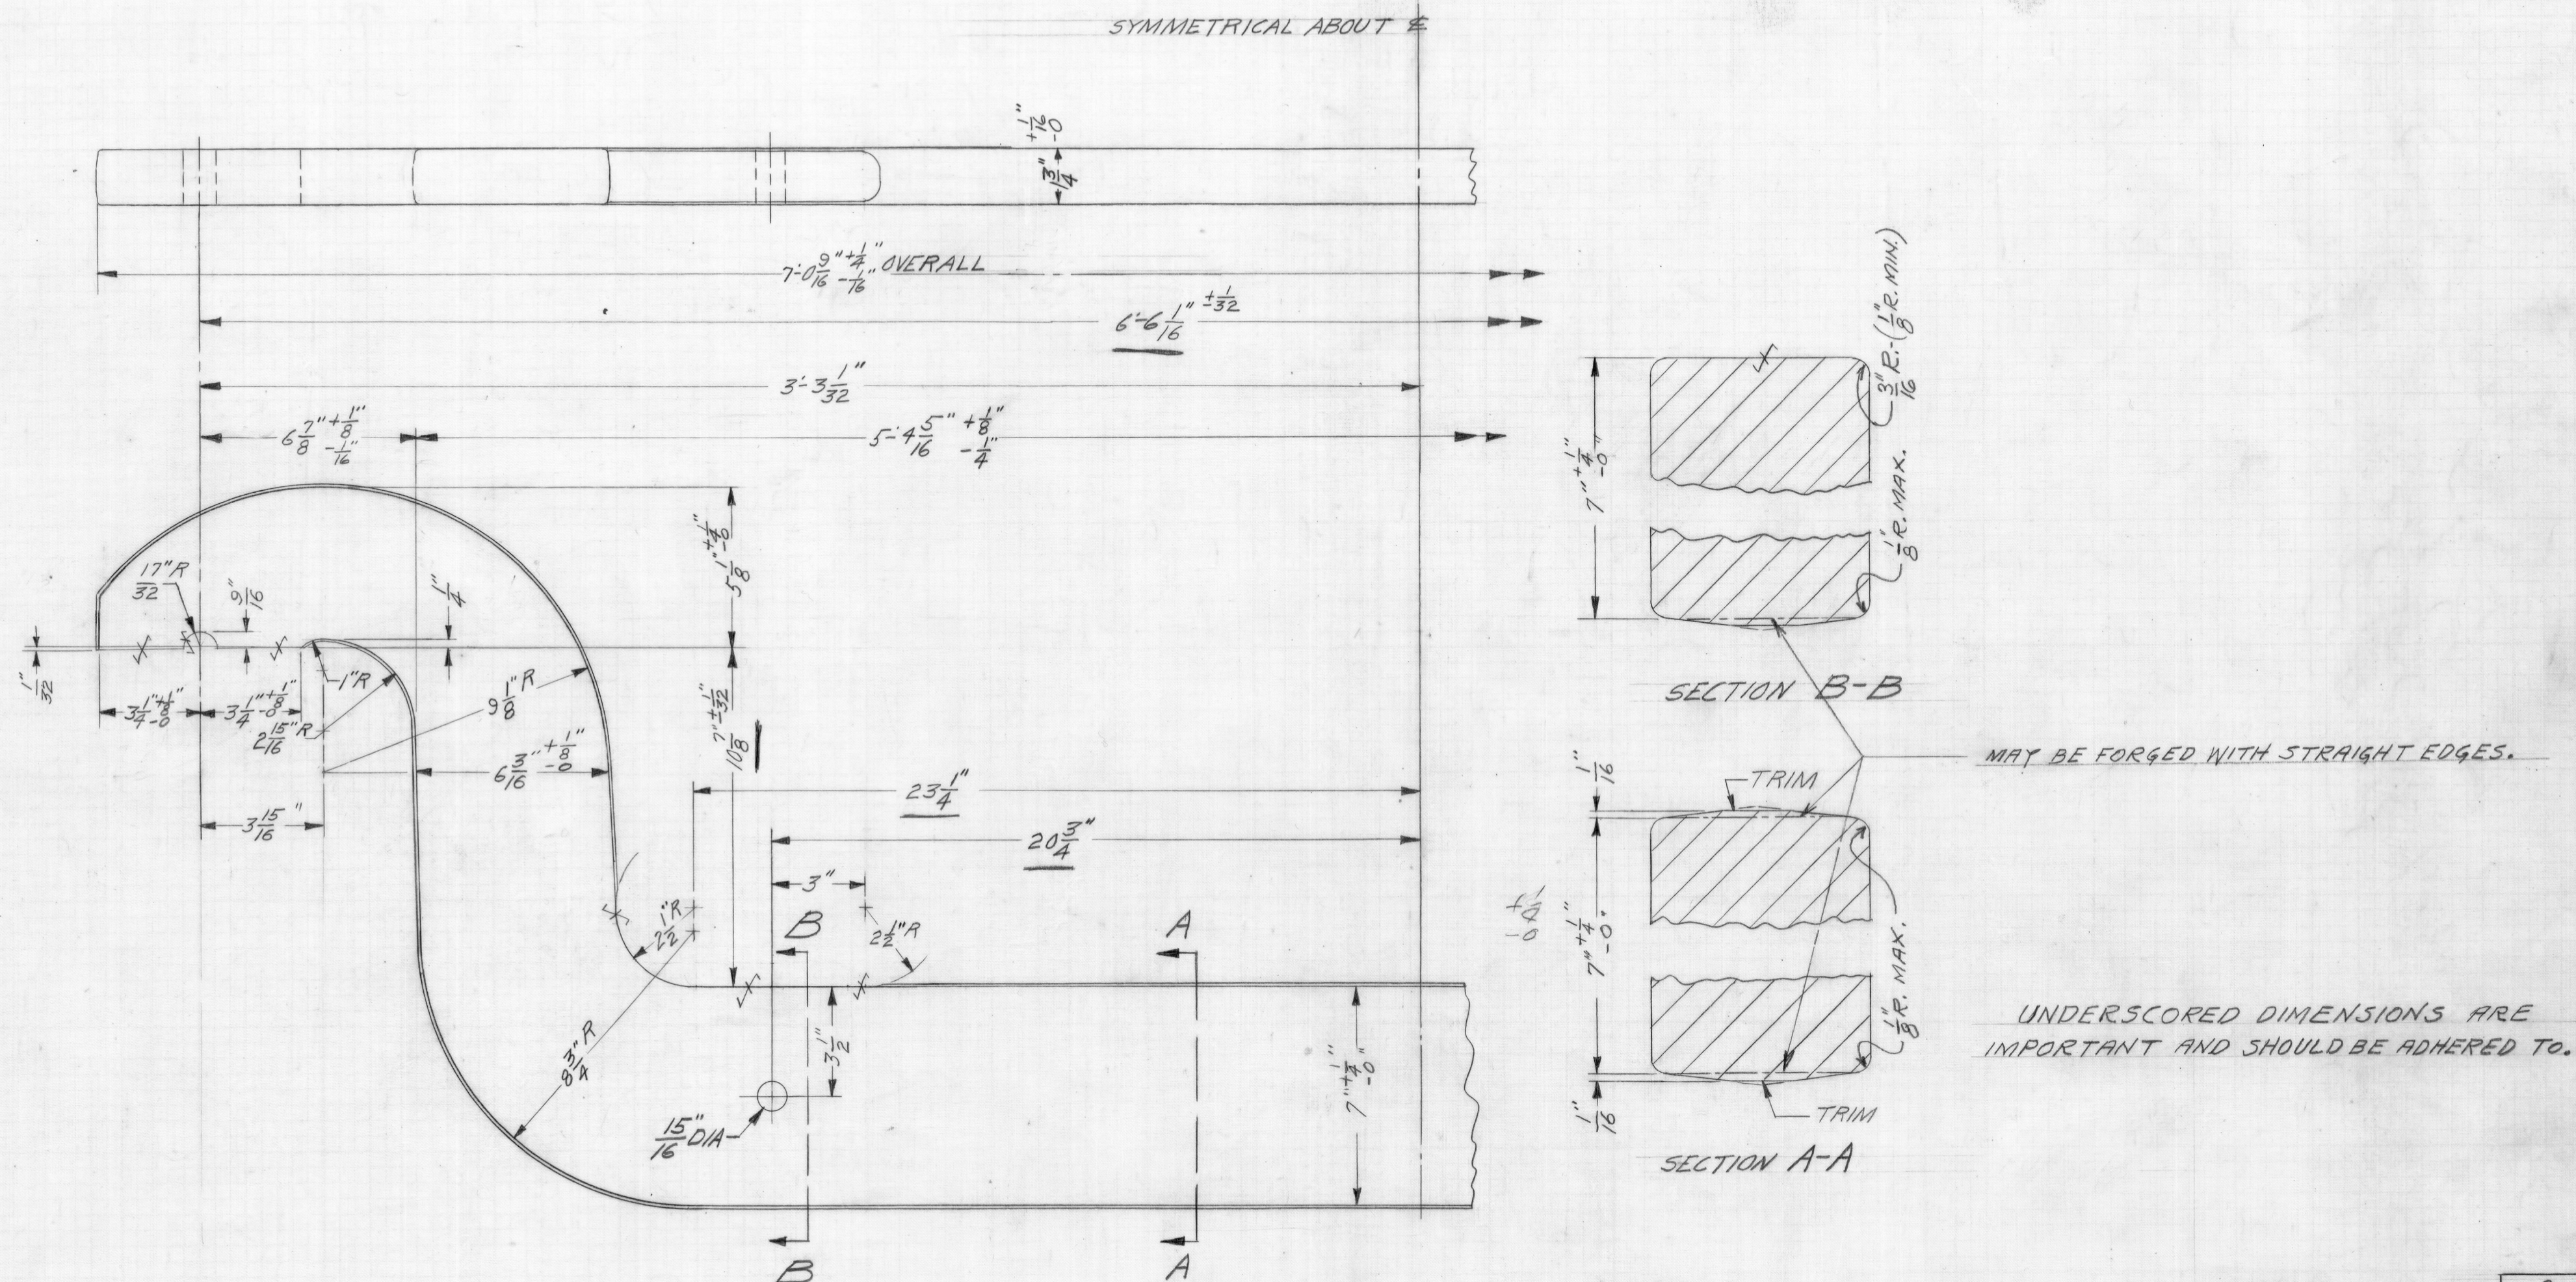

- 1- BOTH MACHINED AND ROUGH EDGES TO BE SMOOTH AND WITHOUT TRANSVERSE TOOL MARKS.
- 2- SURFACES MARKED 'X' TO BE MACHINED.
- 3- EQUALIZERS TO BE NORMALIZED AFTER FORGING
- 4- REQUIREMENTS OF A.A.R. SPEC M-126-45 CLASS 'C' TO BE FOLLOWED EXCEPT:
MATERIAL TO A.I.S.I. C-1030
TENSILE STRENGTH 70000 $\pm$ MIN.
YIELD STRENGTH 40000 MIN.

FORGED

8	3/75
NO. PER CAR	LOT

American Car and Foundry Co.

31-14570

EQUALIZER -
5 1/2 X 10 TRUCK


1-10-47

a.c.f.

RY. EX. AGENCY

HP 1/24/47 A- CHGD. RAD. FOR SPRING SEAT AT SEC. B-B; 3/16" R. WAS 1/8" R.

JPG.
D.V.B.

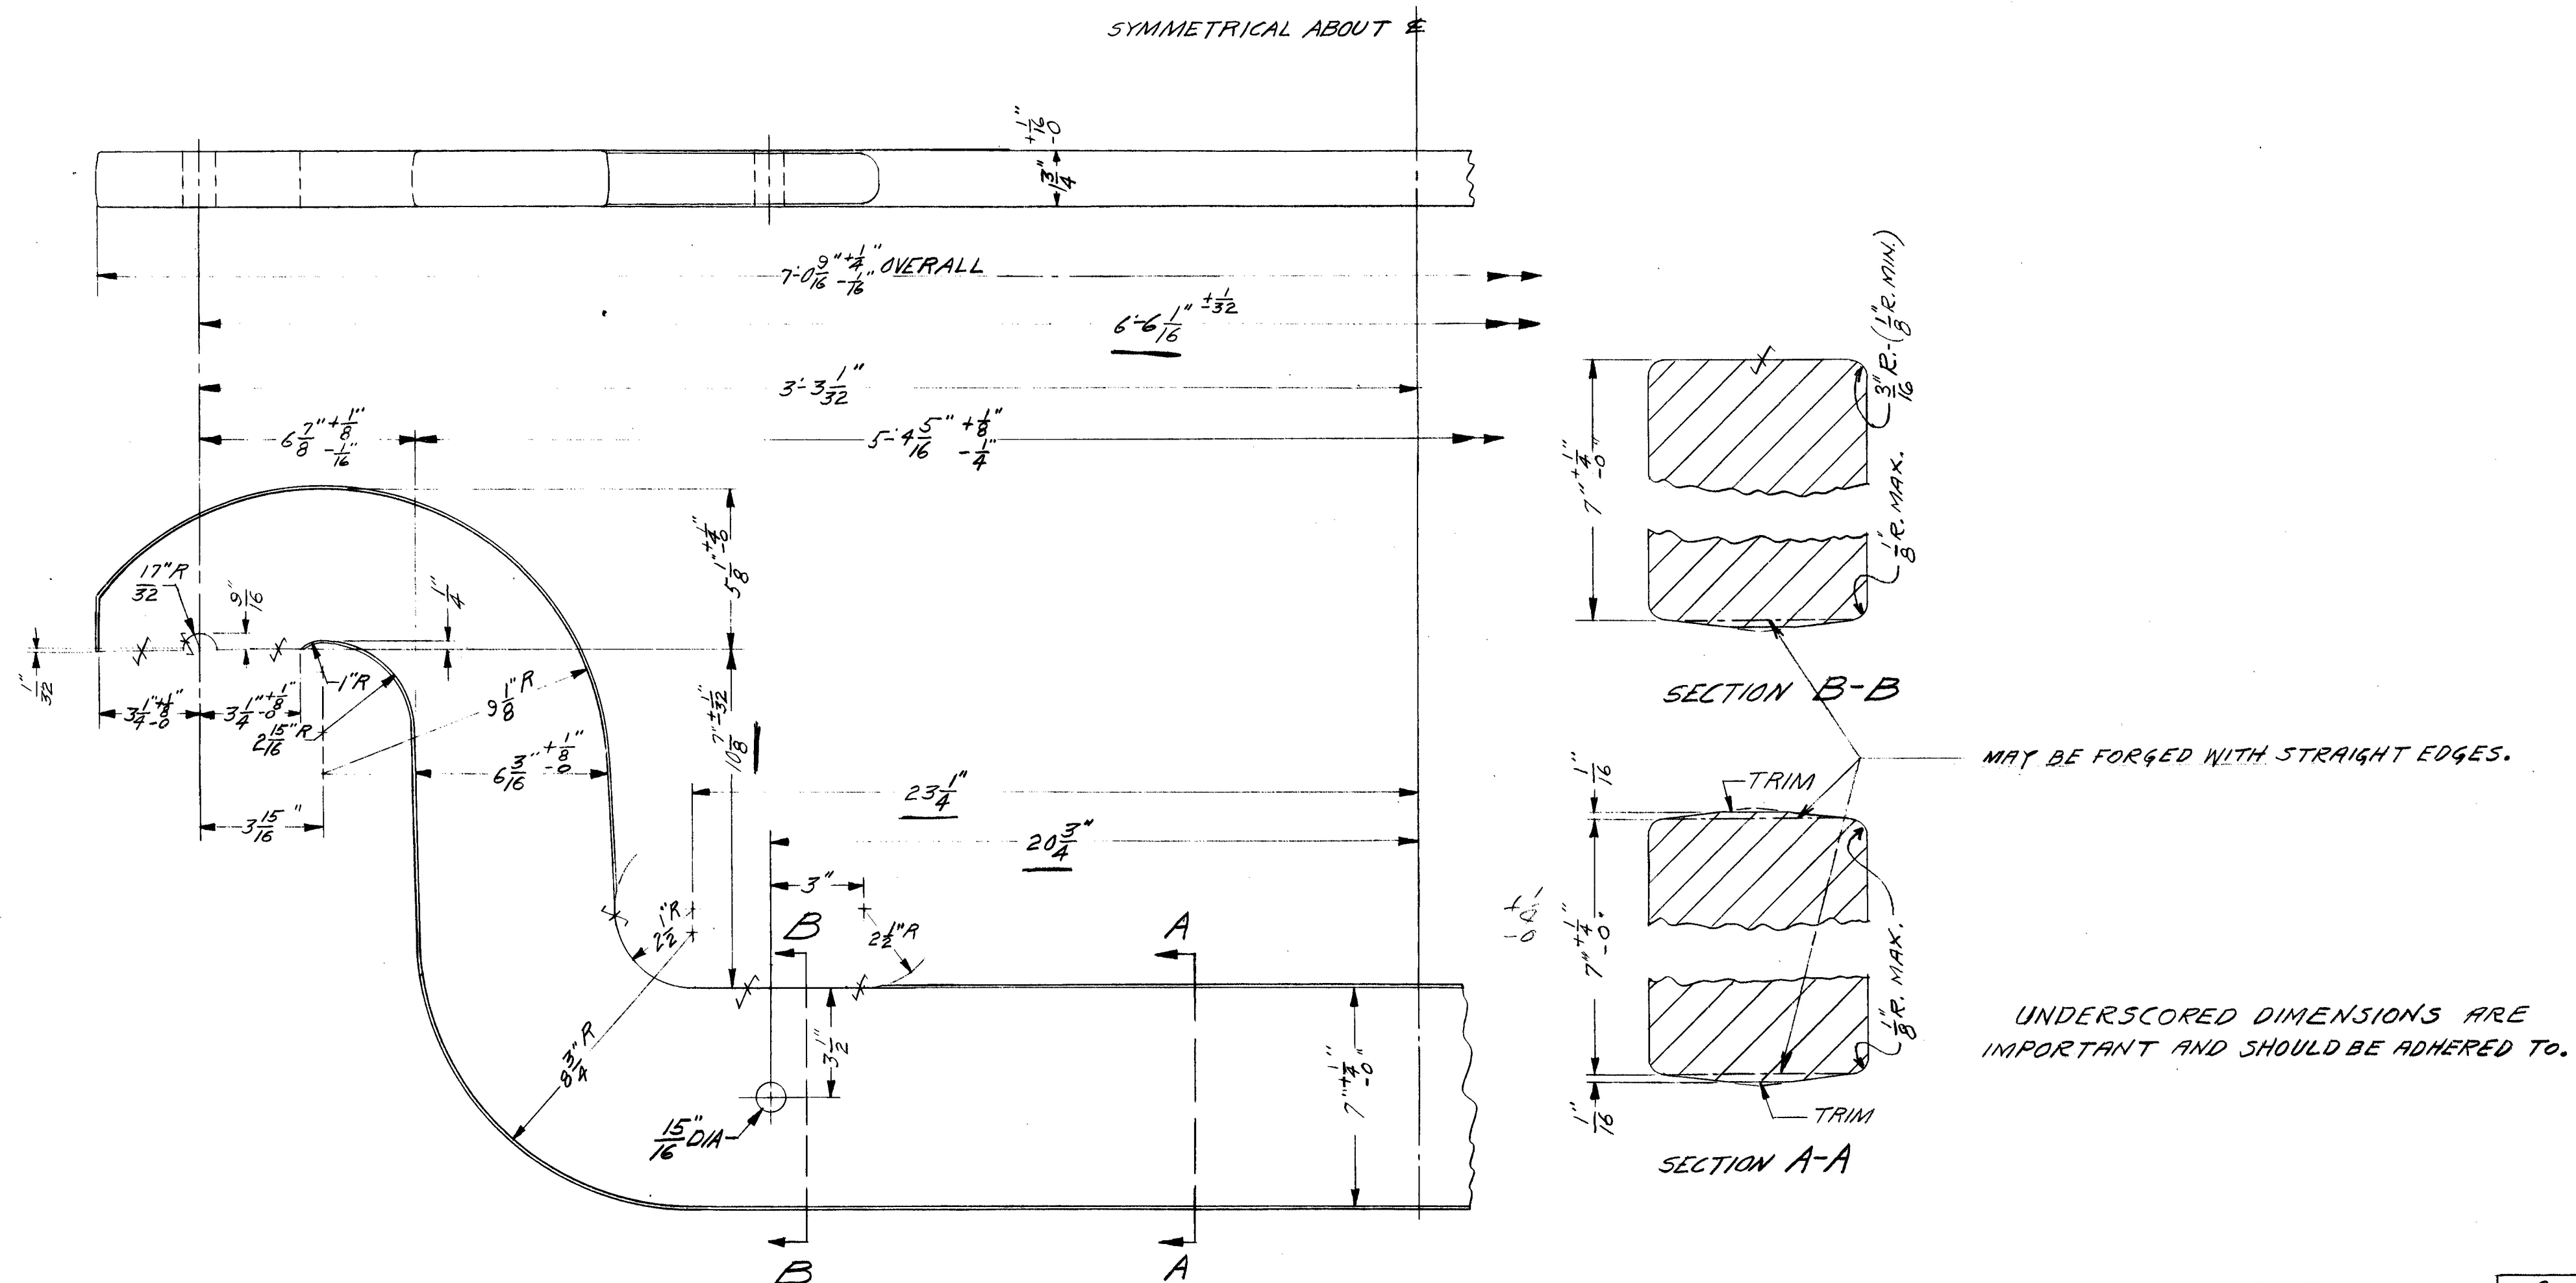

- 1- BOTH MACHINED AND ROUGH EDGES TO BE SMOOTH AND WITHOUT TRANSVERSE TOOL MARKS.
- 2- SURFACES MARKED $\times$ TO BE MACHINED.
- 3- EQUALIZERS TO BE NORMALIZED AFTER FORGING
- 4- REQUIREMENTS OF A.A.R. SPEC M-126-45 CLASS "C" TO BE FOLLOWED EXCEPT:
MATERIAL TO A.I.S.I. C-1030
TENSILE STRENGTH 70000 ψ MIN.
YIELD STRENGTH 40000 MIN.

THE STRUCTURE ILLUSTRATED IN THIS DRAWING IS PATENTED OR FOR USE IN A PATENTED STRUCTURE AND SHOULD BE PURCHASED OF AMERICAN CAR AND FOUNDRY COMPANY. THIS DRAWING IS THE PROPERTY OF AMERICAN CAR AND FOUNDRY COMPANY AND MUST NOT BE COPIED OR DUPLICATED.

FORGED

8	3/75
NO. PER CAR	LOT

AMERICAN CAR AND FOUNDRY CO.

31-14570

EQUALIZER -
5 1/2 X 10 TRUCK

1-10-47

a.c.f.

RY. EX. AGENCY

HP 1/24/47 A: CHGD. RAD. FOR SPRING SEAT AT SEC. B-B; 3/16" R. WAS 1/8" R.

J.P.G.
D.V.B.