


alignment of all working parts is assured.

The boiler is regularly furnished with full length tubes unless otherwise

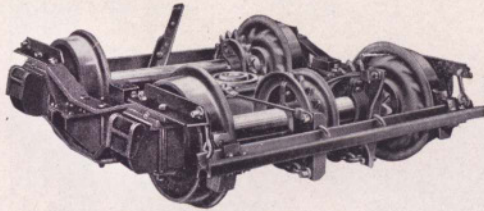

4-wheel trucks used on Clyde Decker Loaders, equipped with shoe brakes on all wheels.

specified. The pressure may be 100, 150, or 200 pounds and all engines are designed to work under pressure of 200 pounds.

This machine is built in several styles and combinations which have a standard listing but may be further modified in various ways if necessary to better adapt them to the conditions where used. Those combinations providing skidding facilities include guying cables, blocks and hand ratchet drums for tightening the side guys.

In considering equipment of this nature the Clyde Company welcomes the opportunity of a personal visit to the operation by its direct representative, without obligation on the part of the purchaser. In this way, better justice to both customer and company may be secured and an assurance given that the best size and combination of equipment is arrived at for the conditions under which it is to be operated.

CLYDE
LOGGING
METHODS

