




are not subject to wear when machine is skidding.

The boiler is mounted on the rear of the car platform. It is

built for a working pressure of one hundred fifty pounds and of proper size to furnish ample steam capacity.

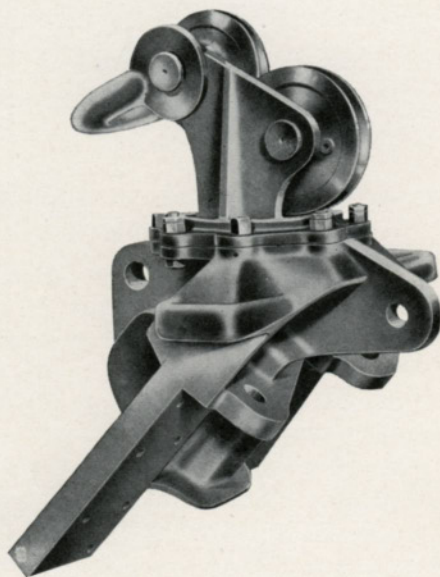

Cast steel boom cap for cableway skidder equipped with storage drum for main cable. Sheaves for main cable and takeup line are mounted in a swiveling bracket so as to lead perfectly in any direction.

