


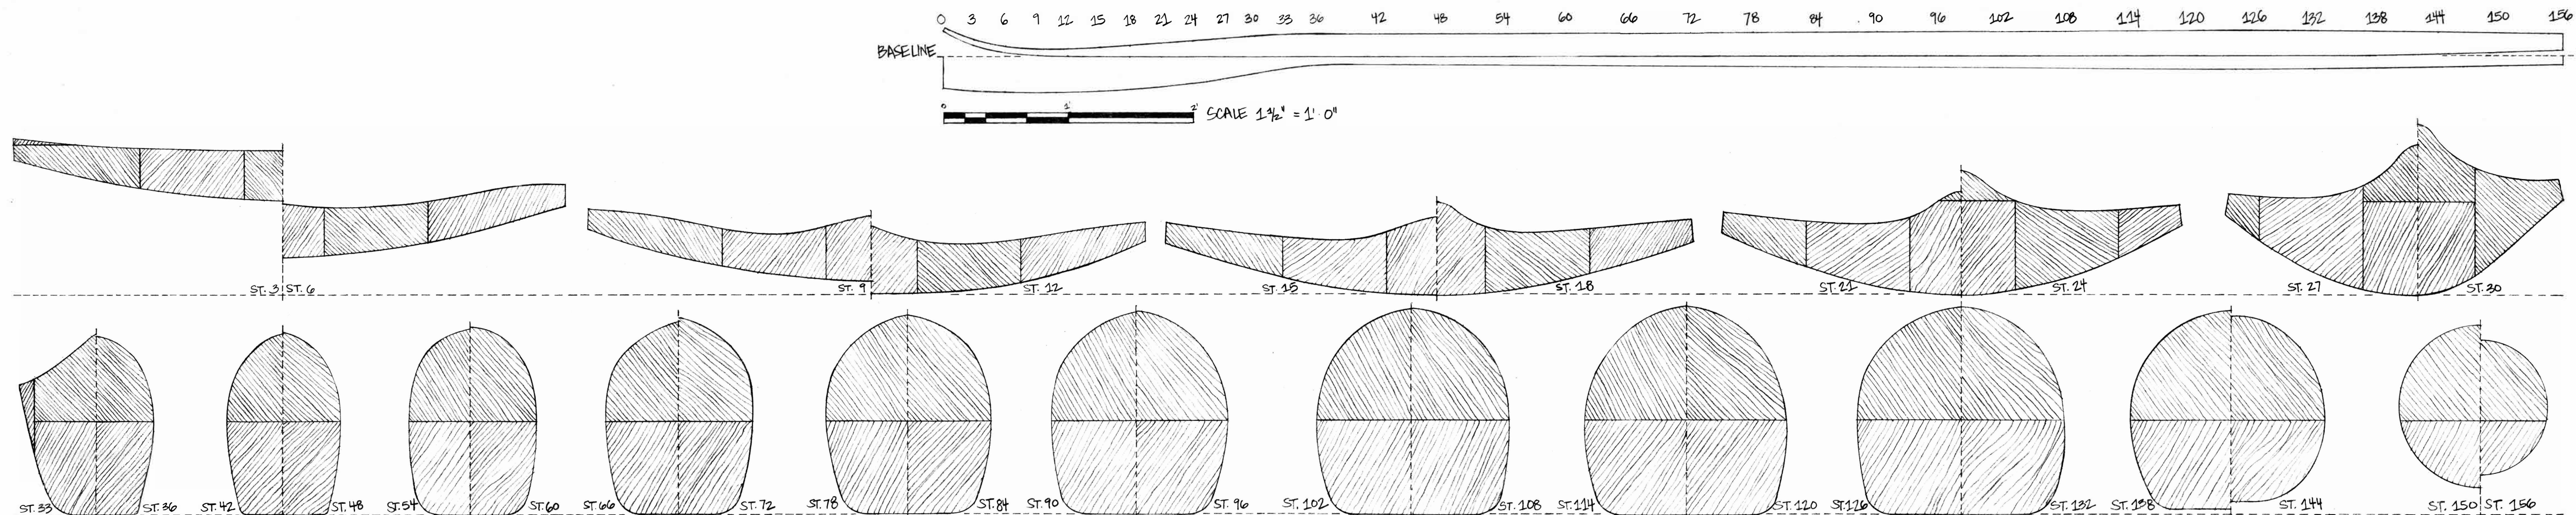

'D' SECTION OAR.




1 1/2" SCALE DRAWING OF A 13' OAR (13'-0" 0" = FEET-INCHES-EIGHTHS).
FULL SCALE CROSS SECTION DRAWINGS
STATIONS 0 TO 24 (BLADE) SPACED 0'-3" 0" REMAINING STATIONS SPACED 0'-6" 0".
STATION 0 IS A RECTANGULAR PATTERN AT THE END OF THE BLADE.
RECENT CONSTRUCTION OF THESE OARS HAS INCLUDED A TAPERED HOLLOW SECTION.
SITKA SPRUCE WITH HARDWOOD CROSS GRAIN SCAFFOLD TIP.
3/8" T SLEEVE 16" - 52" FROM HANDLE.
OUTBOARD BUTT ON FACE 48" FROM HANDLE.

OARLOCK BRACE

STAINLESS STEEL SHEET METAL BRACE (BOLT,
WASHERS, NUTS).
MACHINED STAINLESS STEEL ROUND STOCK PIN (WASHERS,
NUT, & CASTLE NUT).

OARLOCK BASE

SILICON BRONZE CAST (SILICON BRONZE THROUGH BOLTS AT OARLOCK BLOCK).
3/8" BRASS PLATE (SILICON BRONZE PIN HEAD SCREEN, THREADS INTO PLATE) OVER
HARDWOOD BLOCKING (FIBER 4" AFF SHELLS ON OUTBOARD FACE 3/4").
FOUR COTTER RIVETS THROUGH BLOCKING BETWEEN FRAMES.
ONE COPPER RIVET THROUGH EACH BLOCKING FIBER 4" AFF OF FRAMES.

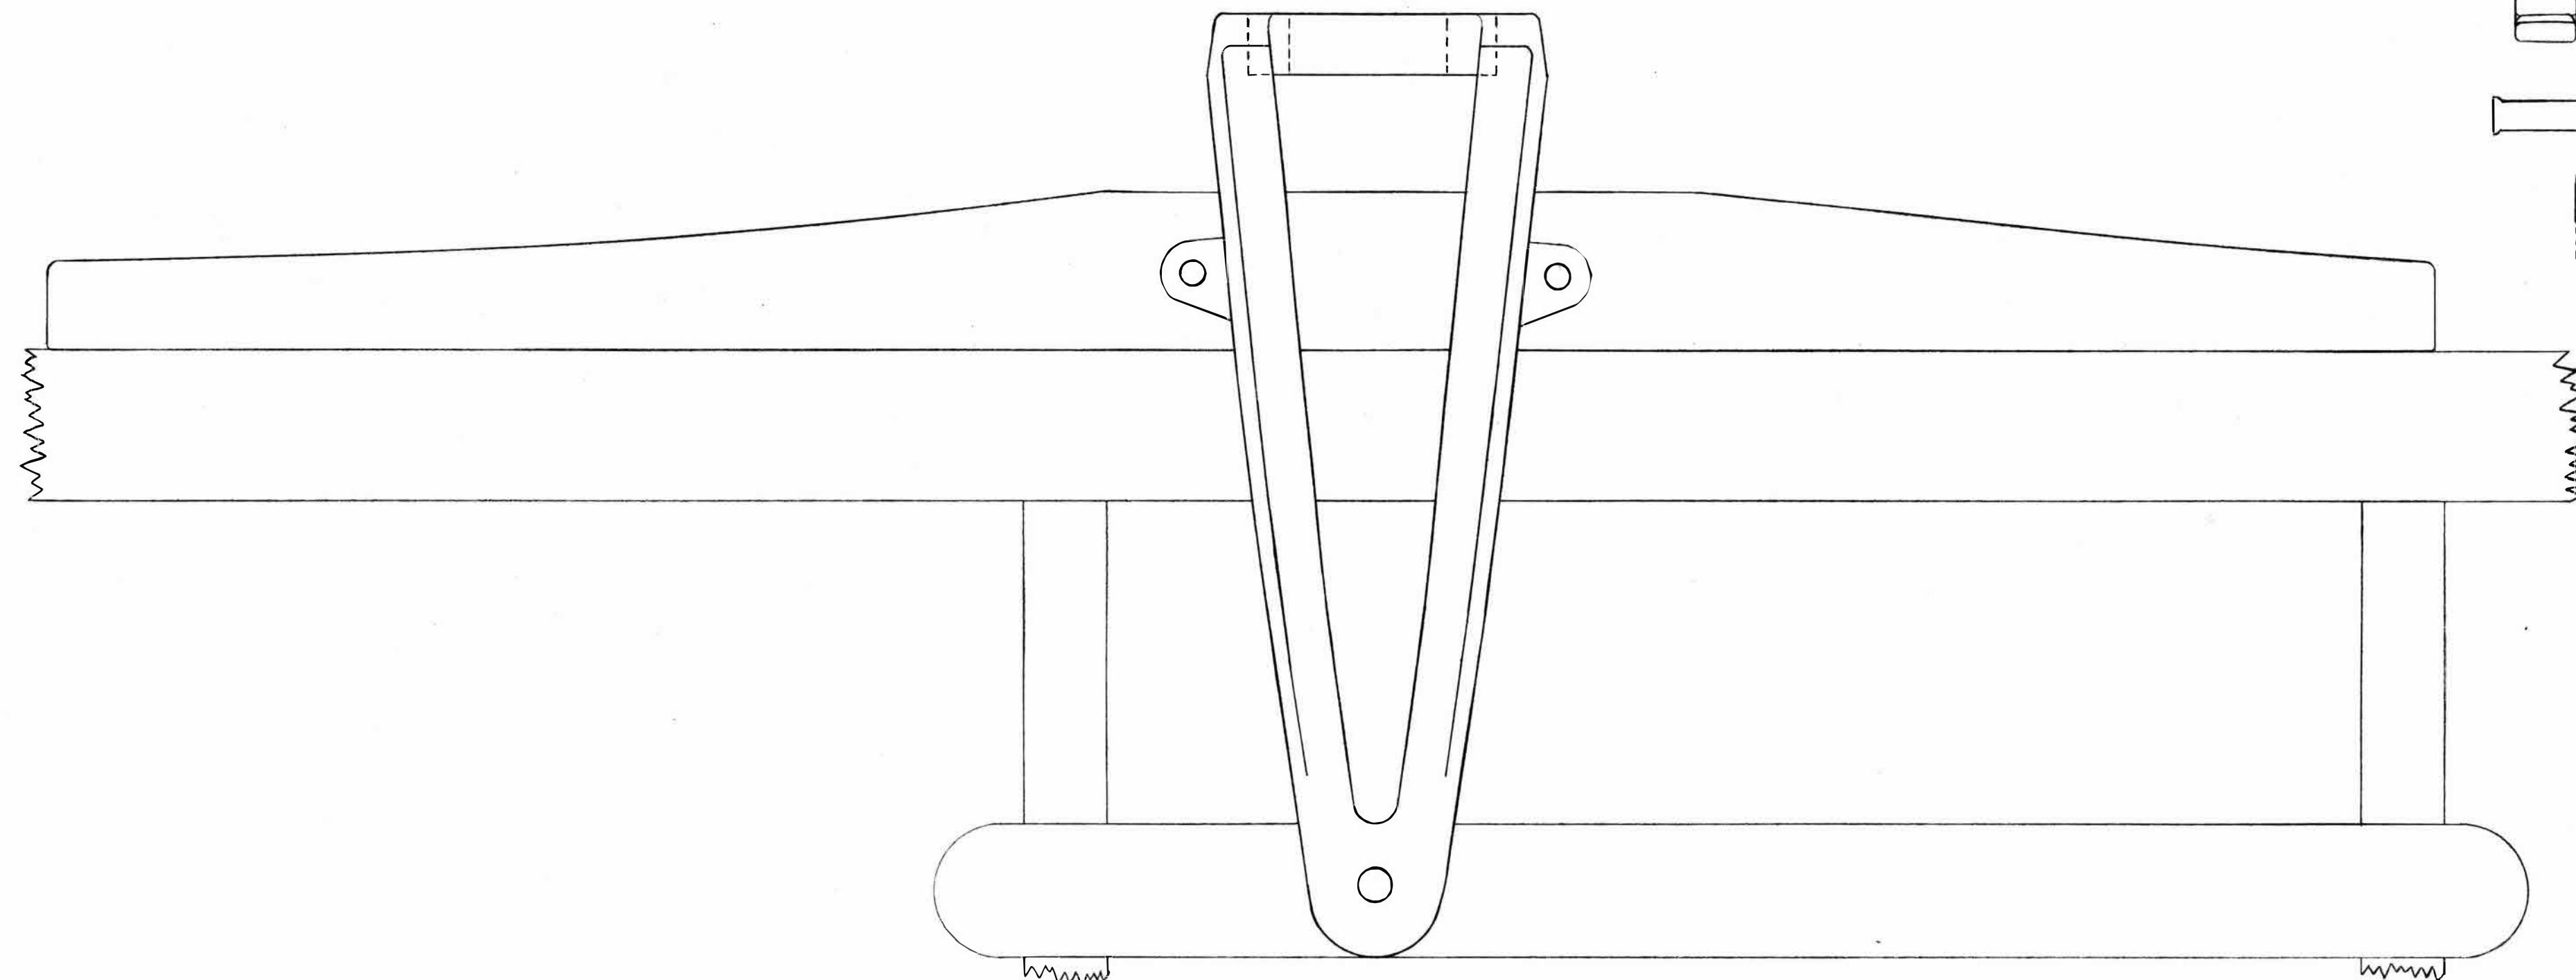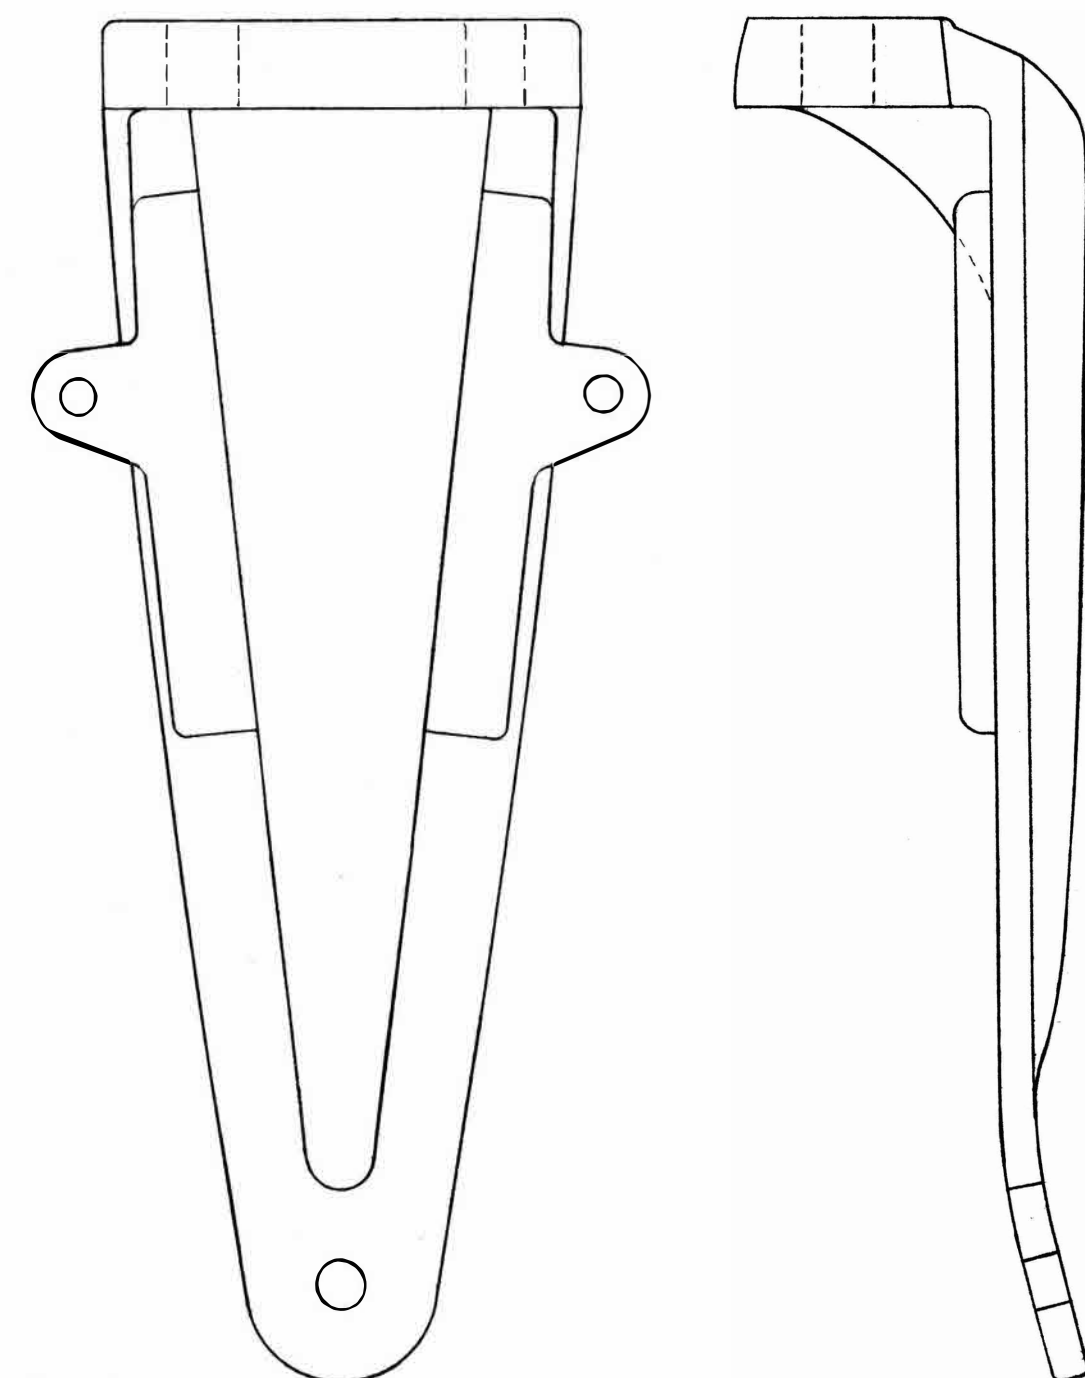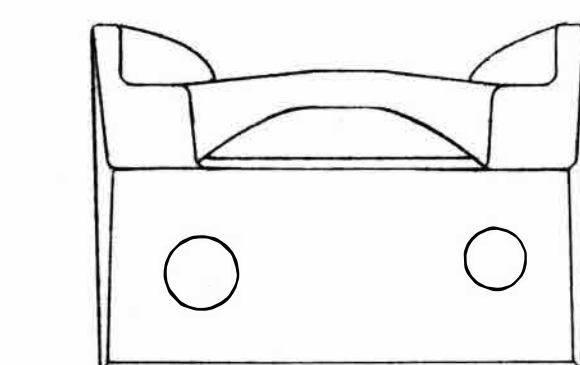

'D' SECTION OARLOCK WITH LOCKING GATE

SILICON BRONZE CAST (NICKEL PLATING)
SILICON BRONZE ROD STOCK GATE WITH NUT
SILICON BRONZE CAST SLIDE LOCK.

SCALE 1" = 1'.

