

United States Department of the Interior
National Park Service

National Register of Historic Places Registration Form

This form is for use in nominating or requesting determinations for individual properties and districts. See instructions in National Register Bulletin, *How to Complete the National Register of Historic Places Registration Form*. If any item does not apply to the property being documented, enter "N/A" for "not applicable." For functions, architectural classification, materials, and areas of significance, enter only categories and subcategories from the instructions.

1. Name of Property

Historic name: Saugatuck Gap Filler Annex

Other names/site number: _____

Name of related multiple property listing:

N/A

(Enter "N/A" if property is not part of a multiple property listing)

2. Location

Street & number: 753 Park Street

City or town: Saugatuck State: MI County: Allegan

Not For Publication: City:

3. State/Federal Agency Certification

As the designated authority under the National Historic Preservation Act, as amended,

I hereby certify that this ___ nomination ___ request for determination of eligibility meets the documentation standards for registering properties in the National Register of Historic Places and meets the procedural and professional requirements set forth in 36 CFR Part 60.

In my opinion, the property ___ meets ___ does not meet the National Register Criteria. I recommend that this property be considered significant at the following level(s) of significance:

___ national ___ statewide ___ local

Applicable National Register Criteria:

___A ___B ___C ___D

<hr style="border: 1px solid black;"/>	<hr style="border: 1px solid black;"/>
Signature of certifying official/Title:	Date
<hr style="border: 1px solid black;"/> State or Federal agency/bureau or Tribal Government	

In my opinion, the property ___ meets ___ does not meet the National Register criteria.	
<hr style="border: 1px solid black;"/>	<hr style="border: 1px solid black;"/>
Signature of commenting official:	Date
<hr style="border: 1px solid black;"/> Title :	
State or Federal agency/bureau or Tribal Government	

Saugatuck Gap Filler Annex
Name of Property

Allegan County, MI
County and State

4. National Park Service Certification

I hereby certify that this property is:

- entered in the National Register
- determined eligible for the National Register
- determined not eligible for the National Register
- removed from the National Register
- other (explain:) _____

Signature of the Keeper

Date of Action

5. Classification

Ownership of Property

(Check as many boxes as apply.)

- Private:
- Public – Local
- Public – State
- Public – Federal

Category of Property

(Check only **one** box.)

- Building(s)
- District
- Site
- Structure
- Object

Saugatuck Gap Filler Annex
Name of Property

Allegan County, MI
County and State

Number of Resources within Property

(Do not include previously listed resources in the count)

Contributing	Noncontributing	
<u>1</u>	<u> </u>	buildings
<u> </u>	<u> </u>	sites
<u>2</u>	<u> </u>	structures
<u> </u>	<u> </u>	objects
<u>3</u>	<u>0</u>	Total

Number of contributing resources previously listed in the National Register N/A

6. Function or Use

Historic Functions

(Enter categories from instructions.)

DEFENSE: Air Facility

Current Functions

(Enter categories from instructions.)

VACANT/NOT IN USE

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property

County and State

7. Description

Architectural Classification

(Enter categories from instructions.)

OTHER: Radar Antenna Tower

OTHER: Equipment and Generator Building

Materials: (enter categories from instructions.)

Principal exterior materials of the property: Steel, Fiberglass, Concrete, Asphalt

Narrative Description

(Describe the historic and current physical appearance and condition of the property. Describe contributing and noncontributing resources if applicable. Begin with a **summary paragraph** that briefly describes the general characteristics of the property, such as its location, type, style, method of construction, setting, size, and significant features. Indicate whether the property has historic integrity.)

Summary Paragraph

The Saugatuck Gap Filler Annex occupies the top of a tall dune on the outskirts of the city of Saugatuck, Michigan. Rising above the annex and surrounding trees at the highest point of the dune is a steel antenna tower with a large fiberglass radome at the top. One of the annex's three contributing resources, the tower dominates the site and is visible for miles in all directions. The second contributing resource is the equipment and generator building, a flat roof L-shaped single story concrete block building located at the foot of the tower on its south side and containing the third contributing resource, an AN/FPS-18 radar set and related equipment. Tower, building, radar equipment, and perimeter fence are original to the annex and in their original locations. Nearly all of the radar equipment remains in place in both the radome and building and the exterior appearance of the site is substantially as it was during the period of significance with the exception of some deterioration and ventilation hoods and louvers having been removed or covered. Not original to the site, a large illuminated star, webcam, and some small radio antennas have been attached to the tower, a security fence erected around its base, and some contemporary electronic equipment is mounted or scattered about inside the radome. These additions are minor and do not permanently compromise the historical or architectural integrity of the structure or alter the stern aspect of the radar annex which has survived nearly unchanged since it was constructed.

Deleted: The downtown area of Saugatuck lies directly to the east across the river.

Comment [C1]: Generally referred to as the "equipment building" or "equipment and generator building" in official documents. No formal standard found.

Comment [WT(2)]: Did this building have a technical name during its operation? "Control building," or something to that effect. If so, that name should be used in throughout the text.

Deleted: , T

Deleted: other

Deleted: but none of these in a manner that

Deleted: s

Deleted: . Although now surrounded by mature trees not present during the period of significance,

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property

County and State

Narrative Description

Setting

The Saugatuck Gap Filler Annex is located in Mount Baldhead Park in the city of Saugatuck on the west edge of Allegan County, Michigan, about seventy miles north of the Indiana border and four tenths of a mile inland from Lake Michigan. The installation was built at the top of Mount Baldhead, a 230 foot dune rising from a narrow strip of land between the lake and Kalamazoo River, which runs just inland of the eastern foot of the dune with downtown Saugatuck immediately across and slightly south on the east bank.

Deleted: ¶

Deleted: Sited at the top

Deleted: .

Mount Baldhead has played a dominate role in the area from prehistory and has been known by that name since at least the early 1800s in reference to a lack of vegetation on its upper flanks and crest. The dune is visible from many points in Saugatuck and well inland and was a gathering place for native Americans long before the arrival of the first settlers in the area. It became a major draw for tourists travelling primarily by ship from Chicago decades prior to the introduction of the automobile. Nearby hotels and resorts advertised view's of the dune from their establishments and visitors proudly proclaimed having made the climb to the top, a substantial undertaking before the construction of the first stairs sometime in the late 1800s. In 1884 a forty foot observation tower was erected approximately where the radar annex is today, and in 1886 a picnic pavilion was built at the eastern foot of the dune in a tree shaded area favored by campers along the river.¹ It is probable a Ground Observer Corps (GOC) observation post was located at the top of the dune but no documentation has been found to support this. It is inferred due to being the highest elevation in the area and from newspaper accounts of the GOC seeking a new location for the post at the time construction of the annex was scheduled to begin.

Surprisingly, virtually no reaction from residents has been found in area newspapers when plans to build the radar station on this local landmark were announced. A hint of what little response there may have been might be indicated by the village president's slightly defensive tone when he said, "We are getting a lot more than we are giving." while justifying leasing the land to the Air Force.²

The radar antenna tower and equipment and generator building are on a small parcel of land of about two tenths of an acre at the top of the dune, enclosed by a chain link security fence surrounded by mature trees. The annex is perched on a high point on the spine of a line of deeply wooded dunes rising from a broad pocket in the Lake Michigan shoreline where it bows westward to both the north and south. The location was ideal for a "gap filler" radar, designed to fill gaps in the coverage of long range radars due to the curvature of the earth or terrain blocking their view, such as the dunes along Lake Michigan.

Deleted: annex's

Deleted: park and

Deleted: are

Deleted: .

From a vantage above the trees on the tower, the lake extends as far as the eye can see to the west and clouds follow the arc of the sky from beyond the horizon. The low roar of waves piling

¹ Lane, Kit, The Wreck of the Hippocampus and Other Tales of Saugatuck, 1992, Pavilion Press

² Commercial Record, The, Saugatuck, Michigan, June 8, 1956, We get more than we give, p. 1

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

onto the beach carries clearly to the annex and, even on a nearly calm day, there is generally a substantial wind at the platform beneath the tower's dome. On the average day the line of dunes marking the shoreline is visible thirty or forty miles to the south, trending slightly west before vanishing into the haze. To the north the view is usually more sharply defined, the beach rapidly transitioning from waves to the steep faces of the dunes standing high above the lake. The shoreline, bending north and west fifty or sixty miles distant, is defined by the trace of the dunes' sandy slopes shimmering in the sun between the waves and the forest flowing inland from the ridges. The Kalamazoo River emerges from between the dunes one mile to the north, where it empties into Lake Michigan. The Macatawa River channel and Big Red lighthouse at Holland, Michigan, are clearly visible seven miles further up the shoreline. Closer, the municipal water reservoir is visible through the trees on Lone Pine dune immediately north of the annex.

The stark white radome at the top of the antenna tower is an iconic landmark clearly visible for many miles in all directions and has been used as a navigational aid for mariners far from shore seeking Saugatuck or nearby ports since it was placed on the tower. It has frequently been depicted in the work of area artists and was prominently featured for many decades on the first page flag of the local newspaper.

Adjoining the annex immediately to its south is the large wood deck of Mount Baldhead Park at the top of 302 stairs which climb the inland side of the dune from a gravel parking lot on Park Street (Photos 0003, 0004, & 0027). Park Street runs north and south at the inland foot of the dunes, paralleling the west bank of the Kalamazoo River, and provides the primary access to Mount Baldhead and the Gap Filler Annex site today. From the deck, visitors can survey points miles inland in every direction. The City of Saugatuck is immediately across the river to the east and the City of the Village of Douglas just beyond Kalamazoo Lake to the south. A popular trail leads west from the deck on the crest of the dune, and forks into two paths, each leading to Oval Beach on the Lake Michigan shore. One branch, makes a gradual descent down a winding ridge, while the other, which has been used over the years to move equipment to and from the radar site, runs directly down the west side of the dune through thick pine trees and deep sand.

General Characteristics

The Saugatuck Gap Filler Annex consists of a large radome supported on a seventy foot tall three legged steel antenna tower immediately adjacent to a one story flat roofed concrete block building built on a standard L-shaped floor plan with an AN/FPS-18 radar set inside, all enclosed within a chain link security fence (Photo 0007).

The antenna tower is positioned at the north end of the fenced enclosure with the equipment and generator building at the south side of its base. The building is of concrete slab construction with two rooms of approximately 1,150 square feet total area and walls ten-feet-eight-inches in interior height. The larger of the two rooms is the equipment room and it forms the west half of the building with its north wall being the top of the "L." The smaller generator room is about one half the size of the equipment room and forms the lower leg of the "L," extending toward the east from the south end of the building. Layout and structural details of building and tower

Deleted: over

Deleted: where it

Deleted: branch

Deleted: following

Deleted: path down a

Deleted: ,

Deleted: , following a trail which has been used over the years to move equipment to and from the radar site

Deleted: L-shaped

Deleted: within a perimeter of a

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

follow the standard plan³ for most of the gap filler annexes built, with minor modifications to accommodate the location.

A line drawn thru the centers of the two southern most tower legs at ground level would run parallel to the north wall of the equipment **and generator** building, about nine feet away. A line drawn through the center of the equipment room long axis would run approximately through the center of the tower's footprint and lie about 13° to the west of north.

Both tower and building are enclosed in a chain link security fence which forms the perimeter of the parcel upon which the annex is sited. The fence is of heavy construction supported by a mix of tubular and I-beam cross section steel posts in concrete footings. Three rows of barbed wire run along the top, slanted outward, now missing in many places. The fence is original to the annex and is nearly completely intact in fair condition with the exception of a missing eighteen-foot section on the south side which spanned the area between the double gate to the west and single gate to the east, both still in place. The missing section was removed within the last twenty years or so.

Antenna Tower and Radome

Looming above the building and dominating the annex, the antenna tower with its radome – **the spherical fiberglass dome enclosing the radar antenna** – is a landmark clearly visible for miles in every direction. The legs of the tower are fastened to three square concrete piers thirty inches to a side and twenty-four inches tall, each oriented to face the center of tower footprint and arranged with their centers forming the points of an equilateral triangle sixteen feet, six inches on a side. These piers, tilting inward to follow the angle of the legs, are merely the tip of a concrete iceberg, each a small extension of three broad hexagonal footings sunk deep into the dune. Each tower leg begins as a massive steel beam one half inch thick, the cross section forming a flattened “U” with its sides spread to one hundred twenty degrees, approximately six inches on a side with the sides joined by radius of perhaps twelve inches. The bottom of each leg is bolted to two very substantial angle iron brackets, three-quarters of an inch thick, which are in turn welded to an inch-and-a-half-thick steel plate measuring sixteen inches by eighteen inches, fastened to the concrete pier by six one-and-one-half-inch-diameter studs and nuts. The legs are built in five sections, each of a slightly smaller cross section as it ascends, each lapping inside the next lower section and bolted at the laps.

The legs slope inward as they rise to support the antenna deck, with horizontal angle iron cross braces tying them together at the laps. On all three sides of each leg section, diagonal bracing of heavy steel rods form large Xs with lugs made of thick steel plate at both ends, one end bolted to the laps of the leg sections and the other to plates at the centers of the Xs. There are no means to adjust the tension of the diagonal braces which, despite this, appear to be very taut.

³ Most AN/FPS-14 gap filler annexes followed the standard plan of an L-shaped two room flat roofed slab construction concrete block building as depicted in MIL-HDBK-162A, Department of the Army Technical Manual TM 11-487C-1, Military Standardization Handbook, United States Radar Equipment, Volume 1, Section 1, December 15, 1965, Radar Set AN/FPS-14. **The building was standardized for the original FPS-14 radar, later replaced by an FPS-18 which is extant today.**

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

Starting at the southwest leg of the tower steep metal stairs wrap their way up the periphery in five flights, each flight ending in a landing attached to a leg and doubling back to the next flight. A switch mounted to the tower leg at the bottom of the stairs is connected to lights positioned to illuminate each flight. The stairs are of open grating stamped into heavy bent sheet metal treads bolted to angle iron risers and railings, all in a black finish which appears to be paint. There are seventy-one steps leading to a platform of metal bar grating at a height of sixty-two feet above the ground. Seventy feet above the ground, the antenna deck forms a ceiling over the platform. A final flight of seven treads leads from the platform to the sliding steel door that provides access to the interior of the radome, with one last step up to the antenna deck, for a total of seventy-nine.

Deleted: hatch

The circular steel plate antenna deck is twenty feet in diameter and extends out well beyond the top of the tower legs. The deck is supported at its periphery by six diagonals of heavy angle iron sloping down and inward, attached to the tower legs. Made of 1/8" thick fiberglass, the radome is twenty-six feet in diameter at its equator, arcs to approximately twenty-two feet, eight inches above the deck, and is truncated at a diameter of twenty feet at the base where it attaches to a heavy c-channel ring affixed to the framework supporting the periphery of the deck.⁴

Deleted: and

On a sunny day, amber light filters through flaws in the finish of the fiberglass dome. The AN/FPS-18 radar antenna dominates the space, frozen on its pedestal facing slightly south of west at the point it stopped rotating decades ago (Photos 0028, 0029, & 0030). In the form of a rectangular section of a parabola made of fine wire mesh supported on a welded tubular aluminum frame, the antenna's reflector is nominally eleven feet, five inches tall and spans seventeen feet, eight inches in width across the chord at the bottom, eighteen feet at the top. Tangles of wire snake around the deck leading to a few pieces of relatively modern electronic communication equipment and antennas, most simply lying on the deck, some mounted on tripods or poles, some to the frame of the radar antenna. The dome is formed of fifty-four individual curved panels arranged in nine vertical longitudinal segments of three panels each, all held together by steel bolts through the flanges forming the edges of each panel (Photos 0031, 0032, and 0033 are of panel section part numbers). The segments meet at a final circular section at the dome's apex approximately six feet, nine inches above the top edge of the antenna where an oval hatch provides access for maintenance of the exterior and the pair of red lights on top. A ladder has been placed at the front of the antenna framework leaning to the top of the reflector to facilitate access to the hatch, the feet bolted to C-channel which is bolted to the antenna frame, the top tied to the reflector frame with rope.

Deleted: steel

Deleted: eighteen

Deleted: and about twelve feet in height.

The metal structure of the tower, finished in a black coating dulled with age, appears basically as it did when new with only the most minor surface rust evident. The dome has had occasional maintenance but is once again beginning to show some deterioration, its smooth surface giving way to strands of unprotected fiberglass with rough grayish patches where the resin and white paint have weathered away.

Deleted: dull

⁴ Davis, Phillip et al, staff, MIT Lincoln Laboratory, Rigid Radome Design Considerations, Electronics Magazine, April 17, 1959, Vol. 32, No. 16, McGraw-Hill, p. 66

Saugatuck Gap Filler Annex
Name of Property County and State

Allegan County, MI

Equipment and Generator Building Exterior

The walls of the equipment and generator building are constructed of eight-inch-thick concrete block on the outside with a veneer of four-inch concrete block on the inside. The only exception is the wall dividing the equipment and generator rooms, which also extends north beyond the generator room to form the east wall of the equipment room. This wall is made of eight-inch block with no veneer. Also, on the left side of the equipment room door, the lower seven courses are six-inch block on the outside with a two-and-one-half-inch gap between those and the four-inch block veneer on the inside, forming a recess about sixteen inches deep the purpose of which is not evident.

The main entrance to most gap fillers would have been on what is the west wall of the Saugatuck annex to most effectively accommodate the standard equipment layout. Here, a steep grade does not allow a practical approach to this side of the building so the west wall is an uninterrupted forty-one-foot expanse of cement block with no openings or appurtenances other than the weathered remains of two floodlight fixtures at the far opposite top corners (Photo 0018). Instead, at the west end of the south, or "front" wall, there is a seven-foot-wide concrete apron extending four feet from the building, sloping upward nine inches from ground level to the threshold of an eight-foot-tall double door, five-feet-four-inches wide (Photos 0008 and 0019). Somewhat crudely fabricated of thick diamond plate steel with heavy hand made hinges, the door is mounted nearly flush with the outer surface of the wall and is not original to the building although it is in the original opening.

Deleted: Painted dull black and s

Deleted: does not appear to be

The east half of the front wall is the south wall of the generator room and near the south east corner are two large openings. The larger of the two is just in from the corner, measuring five-feet-ten-inches in width and running from floor level to a height of six-feet-eight-inches. Once housing a substantial quarter round steel ventilator hood which occupied the entire upper half of the opening, it is now covered by two overlapping steel plates, neither original, both welded in place. Immediately to the left of this opening is a smaller one, four-feet-wide and five-feet-four-inches tall from floor level to top, apparently having served as access to remove and install the generator and other equipment. This opening is covered with sheet metal screwed into place at numerous points around the periphery. The sheet metal cover may be original to the building.

Deleted: and painted flat black

Deleted: and finished in flat black paint which is wearing away to reveal a galvanized surface

Deleted: down

Deleted: parallel to the

Deleted: of the terrain

Deleted: and painted in the familiar flat black livery

Deleted: and floor

Deleted:

Deleted: appears to have

Deleted: perhaps two

Deleted: down

Deleted: floor

A pipe runs up the east exterior generator room wall from beneath the ground near the corner, apparently a vent for the underground fuel oil tank, no longer present, that supplied the diesel generator and water heater. Midway along the wall, a concrete landing five-feet-four-inches wide slopes four feet away from the threshold of the generator room's exterior door (Photos 0010 and 0011). Standing seventeen inches above grade, the landing's top surface slants down at a fairly substantial incline. The door opening is now covered with a heavy sheet of diamond plate steel welded in place on a steel frame fastened to the block walls. Beneath the door, a large section of foundation has become unmoored from the rest of the structure, tilting slightly and sliding about four inches toward the east slope of the dune. The door frame, landing, and center section of the wall have traveled with the foundation while other portions and the floor remain in their proper

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

places, resulting in a slight bulge at the center of the wall, most noticeable to the right of the door opening.

Deleted: in

Deleted: .

Deleted:

Deleted: floor and

The movement of the generator room's foundation is also evident on the front wall, having caused a narrow crack vertically spanning six concrete blocks to the left of the large ventilator opening. Separation has also occurred between the blocks at top right corner of the opening extends in a stair step pattern toward the upper right corner of the wall, spreading perhaps two inches at its widest. Of the entire annex, only the south and east generator room walls show evidence of significant deterioration, although not sufficiently progressed to threaten the integrity of the structure as of this nomination (2022).

On the generator room's north exterior wall, six feet, ten inches above the grade, is an opening now covered with a heavily weathered four-foot-by-six-foot sheet of three-quarter-inch plywood, long axis horizontal. This opening apparently once held a ventilation grille or hood to accommodate the diesel generator, acting in companion with the large hood on the south wall. At the top right corner of this wall, near its juncture with the east equipment room wall, is the battered remnant of a photo electric switch which appears to have operated the floodlights positioned at most upper corners of the walls all around the building. The east wall of the equipment room is a featureless span of concrete block with the exception of a weathered floodlight fixture at the top of the northeast corner, its empty socket gazing blindly across toward another at the top northeast corner of the generator room north wall.

Deleted: at head height

Deleted: and painted flat black

On the north end of the building is an area enclosed by a security fence with the antenna tower at the center (Photos 0012 and 0015). The north wall of the equipment room forms the center section of the enclosure's south boundary which is otherwise made of heavy tight weave wire cloth spanning metal fence poles and topped with concertina wire. Intended specifically to discourage access to the tower, this fence is separate from the perimeter fence and is not original to the annex. A contractor stated he installed this fence around 1986 but no documentation or independent accounts have been found to support this.

Deleted: the

Deleted: but the date of its addition could not be determined

Inside the enclosure are two large cooling units mounted toward the outer ends of the north equipment room wall (Photo 0016). Each is about the size and shape of a medium sized refrigerator with its base nominally fifty-five inches above the grade at the wall, supported by heavy angle iron diagonals sloping down and attached to the wall. Curved intake hoods extend from both sides at the bottom of each unit, openings facing downward. Large exhaust hoods on top the units reach nearly to roof level and curve to face downward at slightly more than a forty-five-degree angle. Containing fans and a V-shaped arrangement of radiators, these units dissipated heat from the fluid cooling the klystron final output amplifier of each corresponding radar transmitter.

Deleted: at about shoulder height

Between the cooling units, two conduits, emerge from an opening high on the center of the wall which also accommodated the rectangular microwave waveguide, no longer present. The conduits curve upward to join a waveguide and a third conduit, cropped off with a wire or two hanging out of it, all following the centers of the tower's south side cross braces to the top. The conduits protect wires which supplied electricity to the tower and carried signals to and from the

Deleted: and a stub of the rectangular microwave waveguide

Deleted: at its center

Deleted: where the waveguide resumes after the missing curved section, all joining

Deleted: and

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

radar antenna pedestal. The waveguide once fed the output of the radar transmitters to the antenna and channeled return signals back to the receivers. These are the only substantial connections between the building and the tower. There are also a number of separate wires, apparently of relatively recent vintage, connected to a few antennas mounted on the tower legs and to various communications equipment and antennas in the radome.

Deleted: communications

Deleted: the associated

At the top of the building's walls is a fascia of two-inch-by-eight-inch boards lapping the top edge of the top row of concrete block by an inch or so and extending widthwise above it. The fascia runs around the perimeter of the entire building, with all butt joints beveled and lapped and corners neatly mitered. Seriously deteriorating in some areas, the upper half of the fascia was originally protected by large heavy copper drip edges, mostly still present but now missing or hanging loose in many places.

The roof of the annex is flat and made of multiple plies of asphalt impregnated roofing felt covered with tar and protected by a layer of crushed stone granules (Photo 0027). The surface appears surprisingly sound for the most part but shows substantial deterioration in places, primarily at the edges, with patches of grass and vegetation taking root here and there and a few holes visible. The roof over the equipment room slopes down the height of one concrete block from the center of the building to the west for drainage. The roof of the generator room also slopes down one block height from south to north. A cement block parapet one block wide and two tall, capped with copper coping, runs down the center of the roof from the south end of the building to a point adjacent to the north generator room wall. The parapet is the top of the wall separating the equipment and generator rooms.

A group of four T-shaped ventilators, standing perhaps four feet in height, are spaced evenly down the center of the equipment room roof, the group slightly offset to the south end of the roof. The two at the outer ends are air intakes, each supplying fresh air to the building interior through eight furnace filters. The two center ventilators are connected to a large duct inside the building, running down the center of the equipment room ceiling to pull out hot air generated by the equipment. Once apparently painted black, all have powered fans and three appear to be in fairly good condition with only surface rust evident. The northern-most ventilator has rusted through leaving a hole roughly twelve inches in diameter near the center of the top which is slightly dented downward.

Remnants of the partially collapsed metal chimney for the diesel fired water heater stand at the northeast corner of the generator room roof. The base of a now missing vent pipe is visible at the south edge of the generator room roof next to the parapet, its original use unknown.

The building's exterior was repainted by volunteers in 2021 with paint supplied by the city of Saugatuck, its color closely approximating the original "antique linen." Prior to this the covers of the various openings around the building were painted flat black, reminiscent of blackboard surfaces and inspiring occasional small patches of graffiti; a few inoffensive scrawls in red, white and green paint, remarkable primarily for their scarcity. From period black and white images it appears the main door and various covers were once gray and they were restored to that color during the painting. Most of the wooden trim and drip edges at the top of the exterior walls

Deleted: The dull black paint on each of

Deleted: is

Deleted: has inspired

Deleted: that are now painted black

Deleted: , with t

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

and the ventilators on the roof retain their previous flat black finish. In period images the tower appears to have been finished in a lighter color rather than the present black.

Deleted: painted

Deleted: and the balance of the building white

Deleted: similar to that of the building walls. It's possible the current finish is black primer exposed by the original paint having weathered away

Equipment and Generator Building Interior

The equipment room, the upright of the building's L-shape, is largely filled with two parallel rows of electronics cabinets arranged down the long axis of the room and positioned toward the north end (Photo 0020). There is a single short cabinet beyond them, centered close to the north wall. A little past midway between the south wall and these rows of cabinets there are marks on the tile floor that show where a row of cabinets extended across the width of the room, offset to the east to allow passage around the west end. Of these, only one remains in place near the east wall. Against the south wall, just east of the door, is a cabinet which contained telephone system electronics and, slightly east of that, a cabinet of fairly modern communications equipment.

A diesel generator once occupied the southeast quarter of the adjoining generator room but is no longer present. Two rotary regulators still occupy most of the southwest quarter of the room between the generator mounting pad and the wall dividing the generator room from the equipment room (Photo 0026). In the northwest corner near the dividing wall the control cabinet for the rotary regulators juts into the room from the north wall (Photo 0025). A fuel fired boiler stands in the northeast corner, and various heavy electrical devices, conduit, diesel fuel pumps, fuel tank, and plumbing are arrayed throughout the balance of the room on the floor and walls.

The front door of the building opens into the southwest corner of the equipment room. With a rectangular floor area of 780 square feet, thirty-nine-feet-eight-inches deep and nineteen-feet-eight-inches wide, this room forms the entire west half of the building. Blue-green twelve inch square vinyl tiles still cover perhaps half of the floor area, and appear to be in fairly good condition though covered with a thick layer of dirt and debris. In other areas they have completely crumbled away to reveal the concrete slab. Much of the white paint on the concrete block walls retains its gloss but is dulled and peeling in other places. The ceiling is of corrugated metal sheet supported by open web steel joists which bear on top the uninsulated block walls. While the original finish of the ceiling and its structure is now obscured in many places beneath a thickening layer of rust, vestiges of white remain on the steel joists with various expanses of gray surviving on the corrugated steel. At intervals, incandescent lights in large green enameled steel reflectors extend down from the joists on lengths of white painted conduit.

Comment [WT(3): Did this room have a technical name during its operation?

Comment [C4]: Equipment room is the de facto standard name.

Deleted: the larger of the two rooms,

An AN/FPS-18 radar occupies most of the interior of the equipment room. The AN designation is derived from the Joint Army-Navy Nomenclature System (AN System), a standard for identification of electronic and associated equipment. In the instance of AN/FPS-18, AN/ specifies the AN System, F means "Fixed Ground", P designates "Radar" (referring to the Pulsed output), and S stands for "Search".⁵

Deleted: fills

⁵ Winkler, David et al., Searching the Skies - The Legacy of the United States Cold War Defense Radar Program, 1997, United States Air Force Air Combat Command, p. 73

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

The FPS-18 consists of two redundant sets of transmitters, receivers, and related accessories, facing each other across a central aisle formed by their two parallel rows of identical heavy steel electronics cabinets. The row on the west side of the room was the “A” or active channel, the other being the “B” or backup channel. Doors on the fronts and backs of the cabinets provide access for maintenance from the center aisle and from aisles running between the backs of the cabinets and the walls. Deterioration due to the passage of decades without upkeep is evident and there has been minor vandalism but, to a large extent, everything remains in surprisingly good condition. Despite a layer of light to moderate rust generally evident on exterior surfaces of the cabinets, the electronic equipment inside is in uniformly good shape with few exceptions, as are the external instrument panels with their rows of meters and indicator lights. Most of the vacuum tubes have been removed and a few other electronic components are missing, but there is little evidence of smashed or broken items one would associate with vandalism and no graffiti on the walls or equipment.

Two heavy regulating transformers are mounted on the floor against the walls, one on each side of the room toward the north end. Centered beyond the north end of the FPS-18 cabinets, near the north wall, is the Control Monitor which continually checked the operation of the radar equipment and provided visual alerts when malfunctions were detected. A hand-crank sound powered telephone was mounted on the right side of the monitor cabinet, probably once connected to another in the radome. High on the north wall is an opening where the rectangular waveguide, now absent, passed through to the tower from a large mechanical waveguide switch mounted just beneath the joists, centered between the two radar sets and midway between them and the wall above the Control Monitor. Waveguides conduct microwave energy just as wires conduct electricity. Because microwaves only travel on the “skin” of a conductor, waveguides are formed of light rectangular tubing, often silver plated on the inside to improve conductivity, and are used instead of wire because they are more efficient and reduce distortion of the microwaves. The waveguide switch was used to couple the operating radar set to the antenna while isolating the spare set and diverting its output into a “dummy load” which mimicked the antenna and allowed the equipment to be operated during maintenance or repair without interfering with the function of the other set. The switch selects between the transmit/receive duplexers above each of the two radar sets from which waveguides run to each transmitter (Photo 0023) and receiver (Photo 0022). The duplexers protected the sensitive receivers from the powerful outgoing transmitter pulses.

A rectangular galvanized metal air duct runs down the center of the ceiling between the radar sets. Two smaller rectangular ducts run parallel to the main duct, one to either side, joined to it by a central cross duct. Each smaller duct is positioned directly above one row of the equipment cabinets with individual flared rectangular intakes extending down above each cabinet to carry away the heat generated by the vacuum tube electronics. The ductwork is attached to the joists and connects to the bases of large ventilators on the roof which protrude down through the ceiling. Some white paint remains on the ducts but has largely given way to the oxidized galvanized surface beneath.

At the south end of the main duct is a “T” with air intakes suspended above an empty space once occupied by a row of four electronics cabinets containing the dual redundant AN/FST-1

Deleted: at the far north end of the room

Deleted: which was on standby

Deleted: It

Deleted: is connected to

Deleted: the

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

Coordinate Data Transmitter Set. This is the only major piece of original equipment that is no longer in place in the room, having been removed by a private party at some point, probably in the mid 1990s. One cabinet of this unit has been recovered with some of the electronic modules but the location of the rest is unknown. At the east end of this row was a fifth cabinet containing the AN/FSW-1 Control Monitor Set which is still in place near the east wall.⁶ This unit allowed the essential functions of the annex to be monitored and controlled over telephone lines. It is distinct from the FPS-18 Control Monitor mentioned earlier but communicated with it.

On the ceiling, midway between the mostly absent row of FST-1 equipment and the south wall, the base of the southernmost ventilator on the roof protrudes down and connects to a plenum holding eight furnace-type filters to supply cooling air to the room. There is another identical to it near the north end of the room.

On the south wall, just to the east of the door, is a Bell System rack cabinet which once contained various digital electronics modules associated with the phone system. The modules are of vacuum tube design and are still in the building, but most have been removed from the cabinet which now contains some fairly modern computer equipment connected to a TV camera mounted on the antenna tower.

The wall separating the equipment room from the generator room was not originally provided with a communicating door, apparently meant to act as a firewall. Access to this room was through a door centered on the east wall which has since been closed off with a steel plate. At some point in relatively recent years a number of blocks were removed from the separating wall to provide passage between the two rooms through a cramped rough hole (Photo 0020, far right).

The generator room has a floor area of 370 square feet measuring nineteen-feet-eight-inches south to north by eighteen-feet-eight-inches in width, extending slightly north of east from the building's south end forming the foot of its J-shape. A diesel driven generator was once mounted in the southeast quarter of the room but is no longer present, although a large galvanized plenum still extends from the south wall to where the diesel engine's radiator once was. The two original rotary regulators remain in place on their heavy steel skids in the west half of the room. Standing on the floor near the dividing wall and extending perpendicularly into the room from its place against the east wall is a large electrical enclosure containing controls associated with the regulators and switch gear for the generator. A squat vertical fuel oil fired water heater stands in the northeast corner of the room connected to an expansion tank suspended from the ceiling and, via pipes running across the ceiling and through the dividing wall, to a heating unit mounted near the ceiling toward the south end of the equipment room. Various other electrical boxes, pipes, valves are mounted here and there about the room. On the floor at the southeast corner of the room two fuel pumps driven by electric motors are connected to a large tank hanging from the ceiling. The tank and all associated plumbing are painted orange. The pumps, augmented by a manual pump mounted above them on the east wall, appear to have been transfer pumps from the fuel tank which was below grade outside the building,

Deleted: point

Deleted: fresh

Deleted: and

Deleted: lower leg of an

Deleted: "

Deleted: "

Deleted: with the equipment room as the vertical leg

Deleted: half

Deleted: compact

Deleted: separating

⁶ MIL-HDBK-162A, Department of the Army Technical Manual TM 11-487C-1, Military Standardization Handbook, United States Radar Equipment, Volume 1, Section 1, December 15, 1965, Control Monitor Set AN/FSW-1

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

since removed. Some of the original brick red paint remains visible on the floor which, in places, is scattered deeply with assorted debris. The walls, not quite ten feet in height, are still covered with white paint, peeling in places and dulled by time. Gypsum board or some similar material covers the ceiling, its original finish uncertain and now faded to a sooty color, detaching in many places and fallen or hanging in strips. Visible through patches of missing ceiling, the roof structure is identical to that in the equipment room. A number of light fixtures hang down from the ceiling on conduit, with incandescent lamps in green enamel shades. This room exhibits more deterioration than the equipment room, with heavier rust evident on all of the remaining equipment and paint in worse condition on all surfaces of structure and machinery.

Historical Integrity

Deleted: and Architectural

The Saugatuck Gap Filler Annex retains integrity through its location, design, setting, and materials. Workmanship, feeling, and association also contribute to the ability of the property to convey significance. The property appears today almost exactly as it did during the period of significance, with the exception of the mature trees surrounding the site which were not present at that time. The antenna tower, equipment and generator building, and security fence remain in their original locations, nearly completely intact with no major alterations, as does the radar equipment inside the equipment and generator building and radome.

Location

The location of the property high atop Mount Baldhead and overlooking Lake Michigan was a determining factor in its function and construction. The building and structures retain integrity of location including the antenna tower, equipment and generator building, and security fence.

Design

The property retains its original design elements in structural form, plan, roof design, window and door placement, and tower construction. There have been few additions or changes to the design of the property and none threaten the integrity of the property from its period of significance.

Changes to design include a chain link fence surrounding the tower structure and the addition of several small communication antennas and a webcam located high on the tower structure. Neither compromises the structure's architectural integrity.

An illuminated star twenty-four feet in height, fabricated with an aluminum frame is also attached to the tower structure, facing east. A star was first placed on the Mount Baldhead site in 1953.⁷ Although not original to the annex, the new star was built to closely replicate its wooden predecessor. The original star was mounted on a utility pole where the radar annex now stands and was moved to a new utility pole in November 1956 to accommodate construction of the annex.⁸ This star was illuminated during the holiday season for fifty-nine years. It was connected

Deleted:

Deleted: , with later light features attached to the tower structure in 1969 and in operation for more than fifty years. The current star was constructed and installed in 2012.¶

Deleted: constructed in 1953

⁷ Commercial Record, The, Saugatuck, Michigan, Mt. Baldy Star To Shine Again, December 13, 1957, p. 1

⁸ Commercial Record, New Pole For Xmas Star, November 9, 1956, p. 1

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

to electricity from the annex by the radar technicians in December 1958, just months after the radar became operational, and powered by the annex thereafter.^{9, 10} When Saugatuck bought the annex in 1969 the original star was moved to the present location on the antenna tower. The current star replaced the original on the tower December 14, 2012.¹¹

Setting

As with location, the physical environment of the property was an intrinsic part of its function and use during the period of significance and remains important to the present day. The height and topography of Mount Baldhead makes the property distinctive as a Cold War military site (see Background – The Cold War, below). The experience of ascending a wooden staircase to the radar site maintains continuity with the past; visitors today must climb the steps to reach the annex just as military operators and contractors did in the mid-20th century. Four or five sets of stairs have been built to the top of Mount Baldhead from as early as the late 1800s. A new set was built as part of the radar installation in 1956; the current stairs were built on the same site in 2009. There is additional vegetation and tree cover around the radar site than in the period of significance but it does not undermine the integrity of setting.

Deleted: , a dune 235 feet high

Deleted: reach

Deleted: 300

Deleted: property

Deleted: Five

Deleted: ascend

Deleted: 1884

Deleted: The US Army built

Deleted: stairs

Deleted: 8

Deleted: 8

Materials

The property retains key materials from its original construction. Cinderblock, steel trusses, ventilator hoods, doors, windows, steel tower elements bolted together, and fiberglass radome all remain in place. The site is free from the distracting use of new materials or replacement doors and windows.

Workmanship

As a Cold War era utilitarian structure, the radar station relies on standardized and modular construction methods. This in itself is evidence of the technological practices and aesthetic principles of modernism in the mid-20th century.

Feeling

The feeling evoked by the Saugatuck Gap Filler Annex is distinctive and powerful. The remoteness of the site and necessity of climbing to the top of Mount Baldhead to view it creates an experience similar to that of the builders and radar operators who used the station in its period of significance. The lack of significant alterations or intrusive elements allows the site to convey its historic feeling.

Association

The direct link between the Saugatuck Gap Filler Annex and the history of the communities of Saugatuck and Douglas is most powerful as a visible landmark in Saugatuck's cultural landscape from the Cold War era through to the present day. As a soaring natural feature situated between Lake Michigan and the Kalamazoo River, Mount Baldhead has long served as a landmark for the community. Since the 1950s, the radar tower and its iconic white dome has become a

⁹ Commercial Record, The, Saugatuck, Michigan, Star Shining on Mount Baldhead Thanks to Scouts, December 12, 1958, p. 1

¹⁰ Commercial Record, Observations, December 19, 1968, p. 8

¹¹ Holland Sentinel, The, Holland, Michigan,

City council thanks Brent Birkholz, volunteers for work on holiday star, January 15, 2013

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

recognizable feature that distinguishes the Saugatuck area from other communities along the Lake Michigan shore region. This association is well documented in the visual arts and promotional images of the community as well as playing an important role in shaping Saugatuck's cultural identity for residents and visitors.

Deleted: The Saugatuck Gap Filler Annex appears today almost exactly as it did during the period of significance, with the exception of the mature trees surrounding the site which were not present at that time. The antenna tower, equipment and generator building, and security fence remain in their original locations, nearly completely intact with no major alterations, as does the radar equipment inside the equipment and generator building and radome.¶

The only substantial addition to the grounds not original to the annex is the fence surrounding the tower. A few small communication antennas and a webcam which are not original have been attached to the tower structure, but not in a manner that compromises the structure's architectural integrity. A twenty-four foot illuminated star built on an aluminum frame is also attached to the tower structure, facing east. Although not original to the annex, the new star was built to closely replicate its wooden predecessor constructed in 1953¹². The original star was mounted on a utility pole where the radar annex now stands and was moved to a new utility pole in November 1956¹³ to accommodate construction of the annex. This star was illuminated during the holiday season for fifty-nine years. It was connected to electricity from the annex by the radar technicians¹⁴ in December 1958, just months after the radar became operational, and powered by the annex thereafter¹⁵. When Saugatuck bought the annex in 1969 the original star was moved to the present location on the antenna tower. The current star replaced the original on the tower December 14, 2012¹⁶.¶

¶ While the original illuminated star was not actually mounted on the radar tower during the period of significance, it was closely adjacent to and powered by the annex the entire time the radar was in operation. Rather than negatively impacting the integrity of the site, the new star maintains a nearly seventy year continuity.

8. Statement of Significance

Applicable National Register Criteria

(Mark "x" in one or more boxes for the criteria qualifying the property for National Register listing.)

- A. Property is associated with events that have made a significant contribution to the broad patterns of our history.
- B. Property is associated with the lives of persons significant in our past.
- C. Property embodies the distinctive characteristics of a type, period, or method of construction or represents the work of a master, or possesses high artistic values, or represents a significant and distinguishable entity whose components lack individual distinction.
- D. Property has yielded, or is likely to yield, information important in prehistory or history.

Criteria Considerations

(Mark "x" in all the boxes that apply.)

- A. Owned by a religious institution or used for religious purposes
- B. Removed from its original location
- C. A birthplace or grave
- D. A cemetery
- E. A reconstructed building, object, or structure
- F. A commemorative property
- G. Less than 50 years old or achieving significance within the past 50 years

Saugatuck Gap Filler Annex
Name of Property County and State

Allegan County, MI

Areas of Significance

(Enter categories from instructions.)

MILITARY

ENGINEERING

Period of Significance

1956-1969

Significant Dates

1956

1963

1968

1969

Significant Person

(Complete only if Criterion B is marked above.)

N/A

Cultural Affiliation

N/A

Architect/Builder

Statement of Significance Summary Paragraph (Provide a summary paragraph that includes level of significance, applicable criteria, justification for the period of significance, and any applicable criteria considerations.)

The Saugatuck Gap Filler Annex is one of the few remaining radar installations from the vast Cold War era Semi-Automatic Ground Environment (SAGE) air defense system, designed to automatically detect and respond to Soviet bombers attacking from the north. An enormous

Deleted: The Saugatuck Gap Filler Annex is one of few remaining of the hundreds of radar installations in the vast Cold War era Semi-Automatic Ground Environment air defense system, designed to automatically detect and respond to Soviet bombers attacking from the north. SAGE, an enormous continent-wide network of computers and radars, was the eyes and ears of the North American Air Defense Command. The Saugatuck Gap Filler Annex is one of only four SAGE radar sites to have survived externally intact and is, at most, one of two to have retained nearly all of the electronic equipment. As such, the annex is a vanishingly rare and complete representative of the nation's SAGE Cold War defense system and is nominated for inclusion in the National Register under Criterion A with military significance at the national level spanning the period of 1956, when construction began, to 1969, when the Air Force sold the structures and equipment on the site to the City of Saugatuck. The antenna tower with dome are also nominated under Criterion C with architectural significance as are the radar transmitters, receivers, antenna, and associated electronic equipment, all with engineering significance, all at the national level.

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

continent-wide network of computers and radars. SAGE was the eyes and ears of the North American Air Defense Command.¹⁷ The SAGE project was so important in the Cold War era that it was more expensive and involved more people than even the Manhattan Project which developed the first atomic bomb. Magnetic-core memory was invented for SAGE and real-time computing, interactive graphics, modems, and wide area networking were first implemented in the SAGE system. The Saugatuck Gap Filler Annex is one of only four SAGE radar sites to have survived in its original location with the antenna tower and building intact and is, at most, one of two to have retained nearly all of the pioneering and once classified electronic technology inside the original building. It is the only nearly complete SAGE facility in public hands. As such, the annex is a lone time capsule of the nation's SAGE Cold War defense system and is therefore nominated for inclusion in the National Register under Criterion A with military significance at the national level spanning the period of 1956, when construction began, to 1969, when the Air Force sold the structures and equipment on the site to the City of Saugatuck. The antenna tower and dome are nominated under Criterion C as are the radar transmitters, receivers, antenna, and associated electronic equipment, all with engineering significance at the national level.

Deleted: The SAGE project was so important in the Cold War era that it was more expensive and involved more people than even the Manhattan Project which developed the first atomic bomb. Magnetic-core memory was invented for SAGE and real-time computing, interactive graphics, modems, and wide area networking were first implemented in the SAGE system.

Narrative Statement of Significance

Background – The Cold War

Early in World War II, the United States, United Kingdom, and Union of Soviet Socialist Republics (Soviet Union) joined forces in the Grand Alliance against the Axis Powers; primarily Germany, Italy, and Japan. That the Grand Alliance was often referred to as the “Strange Alliance” is indicative of the strain between the allies, particularly the United States and the Soviet Union. Aggravated by the United States and the United Kingdom excluding the Soviet Union from their secret development of the atomic bomb – the Manhattan Project – the long held wariness between the former two allies and the latter grew into nearly open hostility as they and their post war partners vied to reinforce and extend their influence in Europe after the conclusion of the war, mid 1945.

The atomic bombs that were used against Japan in August 1945 are widely credited with having ended World War II in the Pacific, but it is also largely viewed that Japan's surrender was imminent, the bombings unnecessary, and carried out primarily to intimidate the Soviet Union. A significant number of the Manhattan Project physicists, including the director, had strongly expressed their fears that failure to involve the Soviet Union in the project would engender deep distrust and trigger an arms race between the ex-allies after the war's conclusion.

Tensions crested when, in June 1948, the Soviets imposed a total blockade on the sectors of Berlin occupied by the United States and its post-war western allies. At the brink of open conflict with the Soviet Union, the United States and the United Kingdom launched the massive Berlin

¹⁷ Schaffel, Kenneth. *The Emerging Shield: The Air Force and the Evolution of Continental Air Defense 1945-1960*. 1991. Office of Air Force History. ISBN 0912799609. p. 268

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

Airlift which delivered critical supplies for nearly a year until the Soviets lifted the failed blockade.

Deleted: .

Despite increasing Soviet aggressions the United States felt its nuclear monopoly was an effective deterrent until mid 1949 when the Soviet Union successfully tested its first atomic bomb, about four years sooner than had been anticipated. Earlier, they had unveiled the totally unexpected TU-4 bomber, a literal copy of the United States B-29 with one-way range sufficient to carry an atomic bomb from the Soviet Union to most large cities in the continental United States.

The Berlin Blockade is generally considered to have been the opening skirmish of the “Cold War” in which the key adversaries were to be the Soviet Union and the United States. The subdued but ever present aura of fear that defined the period found its roots in the Soviet atom bomb and the TU-4, but, in 1957, the Soviets’ successful launch and orbit of Sputnik, the world’s first artificial satellite, introduced an entirely new menace: the intercontinental ballistic missile (ICBM). The space race was on, and missile technology evolved so rapidly that by the early 1960s it was displacing the long range bomber as the primary air defense threat.

Deleted: However, t

Deleted: real

Deleted: .

Throughout the 1950s and 1960s the world was immersed in an unrelenting sense of impending nuclear Armageddon as the Soviet Union and the United States engaged each other through proxy wars and traded military and political feints, peaking with the Cuban Missile Crisis, late 1962. In the United States, air raid siren tests, duck-and-cover drills, and “we interrupt this program” announcements punctuated the endless waiting-in-dread anticipation of the rumble of Soviet nuclear bombers approaching over the northern horizon or the silent fall of a nuclear missile.

Comment [NN(5): Although after the opening of the period of significance, I would suggest adding 1-2 sentences here that briefly describe how rapid advancement of missile technology made the threat of missile attack more likely than warplane attack by the mid-1960s(?), which required an entirely new generation of threat detection and response equipment. This helps to set up the overall arc of the Saugatuck story (and SAGE), from being on the cutting edge of technology in the mid-1950s, being upgraded in the early 1960s, to being largely unneeded by its closure in 1968.

Deleted: from

Deleted: by

Deterrence vs. Defense

From the end of World War II, many in the United States Air Force advocated construction of an air defense system to protect the northern approaches to the North American continent, these being the shortest route of possible attack from the Soviet Union. The official strategy of the Air Force, however, was deterrence in the form of the atom bomb and the Strategic Air Command’s massive long range bombing capability. Lacking a tangible threat and with post war military funding limited, support for the defensive systems promoted by the Air Defense Command had very low priority. This view was reassessed when the threat of potential nuclear attack emerged with the arrival of the Soviet atomic bomb and the TU-4, but it wasn’t until the Korean War, mid 1950, that any real sense of urgency developed in the Air Force, reinforced by growing public demands for effective air defense. The Soviet Union demonstrating their first thermonuclear bomb, mid 1953, provided a decisive impetus. The United States was again confronted with an adversary on equal strategic footing.

In 1949 the only vestige of a North American continental defense system was a motley collection of surplus WWII-era radars scattered sparsely across Canada and the northern United States, euphemistically named the Lashup system. By mid 1952 these had been reinforced with the

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

emerging Permanent System¹⁸ network of radars, then the Mid-Canada radar fence, capable only of detecting the passage of aircraft, not direction or speed. The Ground Observer Corps (GOC), disbanded at the end of World War II, had been brought back into service and greatly expanded to address the inability of existing radars to detect aircraft below an altitude of five thousand feet. Visual sightings of aircraft by GOC observers and those detected by radar were reported by telephone to Manual Control Centers where tracks of suspect flights and those of interceptors were plotted by hand on large plexiglass maps as controllers attempted to verbally guide fighter pilots to investigate potential attackers.

The manual control approach exhibited significant difficulties with filtering duplicate sightings, sorting legitimate air traffic from potential attackers, and slow communication and reaction times. These issues were aggravated by numerous gaps in long range "heavy" radar coverage of the northern approaches to the continent and low level blind spots where terrain blocked the view of the heavy radars. Simulated exercises repeatedly demonstrated this system was easily overwhelmed by even small numbers of attacking bombers. As a result, the United States Air Force commissioned a series of studies early in the 1950s to determine the best approach to providing effective air defense capabilities.

These studies concluded that the manual component of continental defense had to be minimized. Among other things it was recommended that ground observers be replaced with radars and that all radars should be capable of transmitting data directly to high speed digital computers which would track flights, compare them with airline and military flight plans to identify suspect aircraft, and determine the most effective of the available responses. The computer would present a rapidly updated composite of all this information on graphical displays from which Air Force personnel would select the most appropriate intercept options with the press of a button.

The lack of radar coverage, both low altitude and long range, was fairly simple to address by building more radars, but no digital computers existed that were capable of processing the huge volumes of data generated by those radars in "real time," rapidly enough to support effective interception of potential threats. At that point there was not even an adequate method of transmitting the data from radars to computers.

Deleted: level

SAGE

The Saugatuck Gap Filler Annex was a single unit of an immense, continent-wide network of automated and manned installations which sought to identify, track, and respond to airborne attackers. Known as the Semi-Automatic Ground Environment (SAGE), this system was controlled by the most capable real-time digital computers of its era and led the cutting edge of digital processing, networking, and communications.

Deleted: To understand the Saugatuck Gap Filler Annex's place in history, some knowledge of the Semi-Automatic Ground Environment (SAGE) and the context in which it was developed is helpful.

¹⁸ Center of Military History, United States Army, History of Strategic Air and Ballistic Missile Defense: Volume I, 1945-1955, 1975, p. 61

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

The SAGE system was originally planned to consist of more than thirty air defense sectors covering the entire United States, its coastal waters, and portions of Mexico and Canada. Each SAGE sector controlled by a Direction Center located within the sector. Direction Centers were huge concrete blockhouses, each containing an enormous AN/FSQ-7 vacuum tube digital computer, the physically largest computers ever built. SAGE was the first non-research implementation of stored program real-time computers, modems, graphical interfaces, light pens – a precursor to the mouse, wide area networking,¹⁹ and numerous other digital computer related “firsts,” including magnetic-core memory which was invented for SAGE and revolutionized processing speeds and reliability.

The Massachusetts Institute of Technology (MIT) had played a critical role in radar development during World War II. In the late 1940s, researchers there began constructing a powerful digital computer named Whirlwind, transferring some of the very short electronic pulse technology developed for radar to achieve the fastest digital computer processing speeds of the era. Whirlwind, originally designed for aircraft flight simulation, was one of few digital computers in existence at that time. It was the only computer that offered the potential of sufficient speed and capability for the air defense application despite being built almost completely with vacuum tube technology due to the recently invented transistor having not yet achieved adequate reliability or availability.

In early 1950 the Air Force contracted with MIT to investigate the feasibility of a computer automated air defense system. Before the year was out Whirlwind had successfully communicated with a single radar a few miles away, graphically displaying the track of an aircraft in real-time from digital data sent over telephone lines. In 1951 Whirlwind’s capability was expanded to presenting flight tracks from a network of several distant radars on a single display. From this, the project grew exponentially, ultimately employing nearly two thousand engineers and technicians. By 1955 Whirlwind was controlling a fully functional prototype SAGE “subsector,” processing the data from thirteen radars and demonstrating the ability to simultaneously display the tracks of forty eight aircraft and the locations and range of available anti-aircraft resources while guiding manned interceptors to investigate potential attackers. With the basic concept proven, IBM was contracted to design and produce a more capable computer based on the architecture of Whirlwind which was then further optimized for the air defense application. Initially dubbed Whirlwind II this computer was officially named the AN/FSQ-7 as it moved from the prototype stage into production.

The SAGE system became operational on June 26, 1958, with the commissioning of two Direction Centers, both in New York state but covering separate multi-state sectors. The AN/FSQ-7 computer at each Direction Center processed the immense amounts of data from all the radars in its sector of responsibility. As additional Direction Centers came online each FSQ-7 communicated with those in adjacent Direction Centers and with similar computers in three widely dispersed supervisory Combat Centers, cumulatively maintaining an overview of every aircraft operating over northern North America which was continuously updated and graphically

Deleted: who produced a

Deleted: of what would become SAGE.

Deleted: When fully deployed in the early 1960s SAGE received data from hundreds of rapidly constructed radars sent via telephone lines and radio to Direction Centers placed at intervals along the northern border in the United States, with one in Canada. Sources vary on the total number of Direction Centers, twenty-three being most often cited, but each was responsible for monitoring all air traffic in an area called a SAGE subsector.

Deleted: Direction Centers were huge concrete blockhouses containing enormous AN/FSQ-7 vacuum tube digital computers, the physically largest computers ever built. SAGE was the first non-research implementation of stored program real-time computers, modems, graphical interfaces, light pens – a precursor to the mouse, wide area networking,²⁰ and numerous other digital computer related “firsts,” including core memory which was invented during the Whirlwind project and that revolutionized processing speeds.¶

Deleted: FSQ-7 computers

Deleted: their sub

Deleted: They

¹⁹ Grometstein, Alan. MIT Lincoln Laboratory - Technology in Support of National Security. 2011. Lincoln Laboratory. ISBN 9780615428802. p. 33

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

displayed on multiple computer consoles and huge projected maps at each center. The FSQ-7 computers compared radar flight tracks with flight plans filed by airlines and the military from which each aircraft was determined to be either a legitimate flight or an unknown. The positions and headings of suspect aircraft were presented on the display consoles with the nearest available interceptor aircraft and missiles also shown and automatically selected. Flight officers need only authorize the most appropriate response after which the FSQ-7 directed interception. Fighter pilots performed the takeoff, then the FSQ-7 took over. If required, missiles were launched and guided to their targets and anti-aircraft artillery batteries were controlled directly by SAGE.

As SAGE became functional more Direction Centers were rapidly being built. When fully deployed in the early 1960s SAGE received data from hundreds of swiftly erected radars sent via telephone lines and radio to Direction Centers, most placed at intervals along the northern border of the United States with one in Canada. Sources vary on how many Direction Centers were placed into service but, of the more than thirty originally planned, twenty-three is most often cited as the total actually constructed.

The number of heavy and gap filler radars in the network that reported to SAGE was continually in flux but reached a peak in 1962 with nearly 250, from the Permanent and Mobile Systems,²⁴ distributed primarily across the northern United States with some in Canada, their squadron assignments and command hierarchy constantly changing. To augment the Permanent System heavy radars and address low altitude blind spots around 240 gap filler radar sites were planned between 1956 to 1962. Not all of those were constructed and, even if actually built, not all had the radar equipment and tower installed. As funding was reduced due to emphasis shifting toward missile defense in the early 1960s, production of radar sets decreased and equipment was often transferred from existing installations to newer gap filler locations that offered some advantage. Ultimately, a maximum of 131 gap fillers were in service at any one time.²⁵

Also reporting to SAGE were the Distant Early Warning (DEW) Line radars just north of the arctic circle, Canada's Mid-Canada Line radar fence, and the Pine Tree Line radars, mostly in Canada but wandering across the border in places. To these were added a small number of radars carried by early warning aircraft and radar picket ships which operated off both coasts, a few dirigibles, and three ill-fated oil-rig-like "Texas Tower" radar installations built on the continental shelf off the New England coast. One of the Texas Towers was lost with all hands in a storm in 1961. Within two years of that catastrophe, the others were decommissioned due to structural, functional, and safety issues.

The SAGE project was initially the responsibility of the United States Continental Air Defense Command (CONAD). After its creation on May 12, 1958, the North American Air Defense Command (NORAD) assumed control of all air defenses in the United States and Canada including SAGE. The defense assets available to SAGE during an attack on the North American continent varied constantly across the period it was operational. At its peak, SAGE was

²⁴ Winkler, David et al., Searching the Skies - The Legacy of the United States Cold War Defense Radar Program, 1997, United States Air Force Air Combat Command, p. 37

²⁵ Winkler, p. 36

Deleted: a graphic

Deleted: ¶

Two Direction Centers were located in Michigan DC-06 at Custer Air Force Station near Battle Creek in the Lower Peninsula to which the Saugatuck Gap Filler Annex would eventually report, and DC-14 at K.I. Sawyer Air Force Base south of Marquette in the Upper Peninsula. When it first became operational DC-06 was responsible for coverage of the Detroit Air-Defense Sector which included Michigan's southern over peninsula and portions of Indiana and Ohio.²¹ As with all Direction Centers, DC-06's sector of responsibility and the number of radars feeding data to it was changing.¶

¶ SAGE initially operated under the command of United States Continental Air Defense Command (CONAD), then the North American Air Defense Command (NORAD), after its creation on May 12, 1958. NORAD had command of all air defenses in the United States and Canada. The resources under control of SAGE during an attack on the North American continent varied continuously across the period it was operational. Ultimately, SAGE was authorized to take command of more than forty squadrons totaling hundreds of interceptor aircraft from the Strategic Air Command fighter escort wings, Tactical Air Command, Air Defense Command, and, under NORAD, the Royal Canadian Air Force²². In addition, during an attack the SAGE system would direct the Army's anti-aircraft artillery batteries, arrayed around scores of high importance targets, and provide targeting data to their Nike missiles at over one hundred sites in North America. SAGE also had exclusive control of sixteen Bomarc missile batteries²³.¶

¶ Despite the array of resources available to it, SAGE was helpless against the ICBM. Its radars were not designed to detect objects in space and, even had they been able to, lacked the range to provide sufficiently advanced warning of missiles approaching at speeds exceeding ten thousand miles per hour. Regardless, SAGE was felt to be an essential component of NORAD, being its on (... [1]

Deleted: ¶

The number of radars in

Deleted: reporting

Deleted: primary and gap filler radars

Deleted: In addition, there

Deleted: three ill-fated oil-rig-like "Texas Tower" radar installations built on the continental shelf off the New England coast,

Deleted: and

Deleted: ¶

To augment the Permanent System heavy radars around 240 gap filler radar sites were planned between 1956 to 1962. Not all of those were constructed and, even if actually built, not all had the radar equipment and tower installed. As fund (... [2]

Deleted: Ultimately

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

authorized to take command of more than forty squadrons totaling hundreds of interceptor aircraft from the Strategic Air Command fighter escort wings, Tactical Air Command, Air Defense Command, and, under NORAD, the Royal Canadian Air Force.²⁸ In addition, during an attack the SAGE system would direct the Army's anti-aircraft artillery batteries, positioned around scores of high importance targets, and provide targeting data to their Nike missiles at over one hundred sites in North America. SAGE also had exclusive control of sixteen Bomarc missile batteries.³⁰

Deleted:²⁷

Deleted:²⁹

Two SAGE Direction Centers were located in Michigan: DC-14 at K.I. Sawyer Air Force Base south of Marquette in the Upper Peninsula,³¹ initially responsible for the Sault Ste. Marie Air Defense Sector, and DC-06 at Custer Air Force Station near Battle Creek in the Lower Peninsula to which the Saugatuck Gap Filler Annex would eventually report. When it first became operational DC-06 was responsible for coverage of the Detroit Air-Defense Sector which included Michigan's southern Lower Peninsula and portions of Indiana and Ohio.³² As with all Direction Centers DC-06's sector of responsibility was adjusted repeatedly throughout its existence, sometimes extending as far as Minnesota, New York state, and Kentucky, although never concurrently. Accordingly, the number of radar squadrons and gap fillers reporting to the DC was also continually changing.³³

At SAGE's peak presence in Michigan there were six prime site heavy radar facilities in service. Seventeen gap fillers were planned for Michigan but only eleven were actually built.³⁴ All of these SAGE facilities were built and in service in the same approximate time frame as the Saugatuck Gap Filler Annex. There were a number of Air Force bases with interceptor aircraft in both the upper and lower peninsulas of Michigan and at least one Bomarc missile squadron just to the west of and under the responsibility of Kincheloe Air Force Base in the Upper Peninsula. In addition there were a score or so of United States Army Nike missile sites scattered about in the state, and a handful of army anti-aircraft artillery battalions positioned as the last defense around potential targets of high importance such as Detroit and the Soo Locks.

Despite the array of resources available to SAGE the system was helpless against ICBMs. The radars were not designed to detect objects in space and, even had they been able to, lacked the range to provide sufficiently advanced warning of missiles approaching at speeds exceeding ten thousand miles per hour. Nevertheless, SAGE was viewed as an essential component of NORAD, being its only resource able to detect and respond to a wave of attack by Soviet nuclear bombers which was felt to be likely following an initial nuclear missile strike. As air defense

²⁸ Winkler, David et al., *Searching the Skies - The Legacy of the United States Cold War Defense Radar Program*, 1997, United States Air Force Air Combat Command, p. 37

³⁰ Historical Reference Paper No. 11, *Nineteen Years of Air Defense*, Directorate of Command History, Headquarters NORAD, May 1, 1965, p. 28

³¹ Winkler, p. 123-125

³² Aircraft Flash, The, Official G.O.C. Magazine, Vol. 7, No. 2, October 1958, Sage System Radar Sites & Sector Boundaries map 06-16-58, p. 4

³³ Cornett, Johnson, *A Handbook of Aerospace Defense Organization 1946-1980*, December 31, 1980, Office of History, Aerospace Defense Center, Peterson AFB

³⁴ <https://www.radomes.org/museum/acwgapfiller.php>, USAF CONUS Gap-Filler Radar Sites, document undated, accessed September 2021

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

evolved into aerospace defense SAGE was slowly phased out and replaced by the Joint Surveillance System but maintained a role in defending the North American skies until 1983 when the last Direction Center was decommissioned.³⁵

The Saugatuck Gap Filler Annex - History

On June 1, 1956, the United States Air Force entered into an agreement with the City of Saugatuck, lease number DA-20-064-ENG-2130, for use of a total of 0.34 acres of land on which to build the Saugatuck Gap Filler Annex. In addition to the radar site of approximately 0.2 acres at the top of Mount Baldhead, the lease apparently also covered an area at the dune's base located about forty feet south of the stairs that contained an underground fuel tank, pumps, and other ancillary equipment. Additionally, the lease appears to have included an easement running parallel to the south side of the stairs, connecting the lower and upper sites.³⁷

Deleted: ³⁶

Construction of the equipment and generator building and the radar antenna tower foundations began in August 1956 with completion anticipated by January 1957. To prepare the site for the building and tower, the top of the dune was leveled about one foot and, as part of the lease agreement with the village, the existing stairs, climbing the east side of the dune from the parking area at its base, were replaced.³⁸ The general contractor was C & C Construction company of Ft. Wayne, Indiana, under supervision of the District Engineer of the United States Army Corps of Engineers, Detroit District. One anecdotal account attributes construction of the perimeter fence to Safe-T-Fence of Allegan, Michigan. The sparsely vegetated dune peak was stabilized with creosoted wood retaining walls while the flanks were planted with trees, bushes, and vines to control sand migration.⁴⁰ The completion date probably applies only to the building, tower foundations, fuel tanks and related plumbing at the top and foot of the dune, and electrical service related equipment. The site likely stood vacant through the balance of 1957 waiting for availability of radar equipment.

Deleted: ³⁹

Building materials were carried up the side of the dune using a tram running on a wooden framed track with steel rails, built parallel to the new stairs on their north side. At the city's request the track remained in place for many years but there is no indication it was ever used after construction was complete. Anecdotal accounts from residents and radar technicians describe the sandy trail ascending the dune from the west side being used to carry equipment to the annex during construction and in later years. There is also a very clear and steep bulldozer trail curving up the north flank of the dune from just north of the parking area at its east foot to near the northwest side of the equipment and generator building, although no accounts relating its use have been discovered.

³⁵ Winkler, David et al., Searching the Skies - The Legacy of the United States Cold War Defense Radar Program, 1997, United States Air Force Air Combat Command, p. 89

³⁷ Memorandum, E05MI0140_01.08_0003, Army Corps of Engineers, June 18, 1991, Enclosure 1, para. 1; Enclosure 3, p. 3 & 4

³⁸ Commercial Record, The, Saugatuck, Michigan, We get more than we give, June 8, 1960, p. 1

⁴⁰ Commercial Record, Progress Report, September 28, 1956, p. 1

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

The equipment and generator building was built on a standard L-shaped floor plan used at nearly all of the gap filler installations.⁴¹ Most gap fillers would have had the door to the equipment room on what is the west side of the Saugatuck annex building but, due to the dune sloping sharply away on that side, the door was located at the southwest corner of the building instead. Some gap fillers would have had larger generator rooms to accommodate as many as three diesel generators but the Saugatuck annex had only one.

Comment [C6]: I have discovered this is not true.

Deleted: This required that some of the electronic equipment be repositioned. The AN/FST-1 Coordinate Data Transmitter was located further to the east side of the room than would be standard, which necessitated placing the AN/FSW-1 Control Monitor Set near the south east corner of the room rather than at the end of the row of FST-1 cabinets where it would normally be.

Eventually the AN/FPS-14 radar equipment arrived and, after installation and testing, the annex became operational in the period between April 1 and June 30, 1958.⁴² Saugatuck's was now the southernmost air defense radar that could detect a bomber, skimming Lake Michigan along the shore on an approach from the north, before it reached the steel mills of Indiana and the city of Chicago. The annex's range extended to about the middle of the lake and slightly overlapped a gap filler near Shelby, Michigan, about seventy miles north. It augmented three heavy radar sites, one about 50 miles inland to the southeast, another 120 miles directly west, and another about the same distance to the southwest,⁴³ none of which could see an aircraft at low altitude or distinguish it against the background of the dunes.

Comment [WT(7): This text speaks to significance under Criterion C. It demonstrates that there was a typology for this facilities, that the typology had distinctive characteristics, and that this is a variation of that typology in response to environment.

Deleted: skimming Lake Michigan

Deleted: skimming Lake Michigan shore on an approach from the north

Deleted: reported to

The Saugatuck Gap Filler Annex was controlled and serviced by the 781st Aircraft Control and Warning (AC&W) Squadron, the "prime site," near Battle Creek, Michigan. During this time equipment had been installed at the prime site to allow it to receive and view radar data transmitted digitally via telephone lines from the gap fillers under its control. Also in this period, the squadron's "long association" with the 172nd Air National Guard Fighter Interceptor Squadron came to a close due to the interceptors being reassigned to reconnaissance duties. The 172nd was stationed at Kellogg Air National Guard Base, also near Battle Creek, just a few miles from the 781st. In their place, the 319th Fighter Interceptor Squadron, stationed at Bunker Hill Air Force Base, Peru, Indiana, became the prime associated interceptor squadron.⁴⁴

Deleted: .

The 781st AC&W Squadron was based at the Custer Air Force Station (AFS) where the "heavy" long range radars were located, just west of Battle Creek and about fifty miles southeast of Saugatuck. Ultimately, the squadron had responsibility for four gap filler sites: Saugatuck, Shelby, and Midland in Michigan, and a site near Richland Center, Indiana, all built in quick succession with Saugatuck the second to achieve operational status. Custer AFS was known by its Permanent System identification number, P-67. As a subordinate of Custer the Saugatuck Gap Filler Annex was designated P-67C. In the last quarter of 1958 the 781st successfully conducted operational testing of the new equipment to be used for communication with the SAGE system.⁴⁵

Deleted: .

SAGE Direction Center DC-06 became operational September 1, 1959, co-located with Custer AFS. The 781st AC&W Squadron's heavy and gap filler radars now began to send data digitally

Deleted: As the SAGE system became operational

⁴¹ MIL-HDBK-162A, Department of the Army Technical Manual TM 11-487C-1, Military Standardization Handbook, United States Radar Equipment, Volume 1, Section 1, December 15, 1965, Radar Set AN/FPS-14

⁴² AFHRA (Air Force Historical Research Agency), 600 Chennault Circle, Maxwell AFB, AL 36112-6424, microfilm reel K0388, 781st AC&W Squadron History, frame 357

⁴³ Aircraft Flash. The Official G.O.C. Magazine, Vol. 7, No. 2, October 1958, Sage System Radar Sites & Sector Boundaries map 06-16-58, p. 4

⁴⁴ AFHRA, K0388, frame 353

⁴⁵ Ibid, frame 349

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

via telephone lines directly to the AN/FSQ-7 computer at DC-06. The squadron's title changed to 781st Radar Squadron (SAGE) October 1, 1959,⁴⁶ when it officially joined SAGE and discontinued its manual control center function.

Saugatuck's AN/FPS-14 radar was removed June, 1963,⁴⁹ to be upgraded by an AN/FPS-18 radar. The FPS-18 was an improved design with a more refined ability to discriminate between fixed and moving targets and with output power of one megawatt, a little over twice that of the FPS-14.⁵⁰ A few months delay followed the removal of the old radar, waiting for the new equipment to arrive. Meanwhile, effective July 31, 1963,⁵¹ all SAGE system radar squadron designations were changed from the Permanent System "P" prefix to "Z" to indicate inclusion in the SAGE system. Custer AFS was now designated Z-67. The 781st squadron history refers to the Saugatuck annex as Z-67C for the first time in the entry reporting the installation of the AN/FPS-18 radar which became operational December 14, 1963,⁵² and remains in place in the equipment room to the present. Also noted is installation of a rigid radome by the 2863rd Ground Electronics Engineering Installation Agency (GEEIA) Squadron. This is the iconic white ball still visible for miles in all directions. Until that time, the radar antenna had been exposed and could be seen slowly rotating at the top of the tower.

The 781st Radar Squadron (SAGE) ceased operation effective March 1, 1965, and deactivated June 25 of that year,⁵³ a result of the incremental decommissioning of the SAGE system due to its inability to detect ICBMs. Control of the gap filler radar at Saugatuck was transferred to the 752nd Radar Squadron (SAGE) on January 27, 1965,⁵⁴ which was located at Empire Air Force Station, Z-34, near Empire, Michigan. The Saugatuck gap filler was redesignated Z-34G and commissioned on February 2, 1965.⁵⁵ As the missile threat continued to gain priority, the 752nd received notice on March 31, 1968,⁵⁶ that operation of all gap fillers would be terminated. The squadron was directed to drain and flush the transmitter coolant systems, tape the doors of the equipment cabinets, and prepare the diesel generators for storage.

April 1, 1968, the Saugatuck Gap Filler Annex was deactivated permanently.⁵⁷ After removing the diesel generator and all spare parts,⁵⁸ the Air Force terminated its lease of the annex site

⁴⁶ AFHRA (Air Force Historical Research Agency), 600 Chennault Circle, Maxwell AFB, AL 36112-6424, microfilm reel K0606, 781st Radar Squadron (SAGE) History, frame 884

⁴⁹ Ibid, frame 940

⁵⁰ MIL-HDBK-162A, Department of the Army Technical Manual TM 11-487C-1, Military Standardization Handbook, United States Radar Equipment, Volume 1, Section 1, December 15, 1965, Radar Sets AN/FPS-14 and AN/FPS-18

⁵¹ Winkler, David et al., Searching the Skies - The Legacy of the United States Cold War Defense Radar Program, 1997, United States Air Force Air Combat Command, p. 93

⁵² AFHRA, K0606, 781st, frame 949

⁵³ Ibid, frame 970

⁵⁴ Ibid, frame 975

⁵⁵ AFHRA, micro film reel, K0603, 752nd Radar Squadron (SAGE) History, frame 1537

⁵⁶ Ibid, frame 1648

⁵⁷ Ibid, frame 1667

⁵⁸ News Palladium, The, Benton Harbor, Michigan, Saugatuck Now Has Own Radar Station, September 13, 1969, p. 7

Comment [WT(8): This information should be earlier in the text so that the overall SAGE structure is clearer to the reader/reviewer. It might look something like:
-SAGE System
--Michigan SAGE Organization
---Saugatuck GFA

Deleted: and their

Deleted: was discontinued

Deleted: The squadron's heavy and gap filler radars now began to send data digitally via telephone lines directly to the AN/FSQ-7 computer at

Deleted: the SAGE Direction Center

Deleted: DC-06

Deleted: , co-located with the 781st at Custer AFS

Deleted: .

Deleted: At that time, DC-06 was responsible for coverage of the Detroit Air-Defense Sector which included Michigan's southern lower peninsula and portions of Indiana and Ohio.⁴⁷

Deleted: The area of DC-06's responsibility was altered repeatedly throughout its existence, sometimes extending as far as Minnesota, New York state, and Kentucky, although never concurrently. Accordingly, the number of radar squadrons and gap fillers reporting to the DC was also continually changing.⁴⁸

Deleted: to

Deleted: intercontinental missiles

Deleted: Ibid.

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

effective December 31, 1968. Possession of the land reverted to the Village of Saugatuck which purchased the building, tower, and all the radar equipment for \$250 in July 1969.^{59, 60}

There was some brief confusion as to what was to stay and what was to remain immediately prior to the sale being officially closed. Sometime in the week of July 18, 1969, a crew from the Air Force was observed dismantling the radome.⁶¹ After a flurry of telephone calls, some reportedly to the Pentagon, the misunderstanding was cleared up before the Air Force crew had proceeded very far and they cheerfully reassembled the portions of the dome they had removed and caulked the joints.

At some point the equipment related to the underground fuel tank at the bottom of the dune was removed, although no record of this was found. The fuel tank and another underground tank near the annex building were removed in 1993 by the United States Army Corps of Engineers.⁶²

Chain of command for the Saugatuck Gap Filler Annex during the period it was in operation was nebulous and ever changing but, at the time the Saugatuck annex became operational, the 781st AC&W Squadron reported to the 30th Air Division (SAGE) as its immediate superior, which in turn reported to the Air Defense Command, in turn reporting to North American Aerospace Defense Command (NORAD).⁶³ NORAD was founded in 1958 and combined the air defense capabilities of the United States and Canada under one unified command. At the end of 1960, after the 781st AC&W Squadron had been rechristened the 781st Radar Squadron (SAGE), its immediate superior was the Detroit Air Defense Sector (SAGE), which then reported to the previous command structure.⁶⁴

At the time the Saugatuck annex was deactivated, the 752nd Radar Squadron (SAGE) Empire listed its immediate superior to be the 34th Air Division which was assigned to the First Air Force, in turn reporting to the newly minted Aerospace Defense Command,⁶⁵ having previously been the Air Defense Command, both sharing the acronym ADC. For some reason the 752nd never lists NORAD in its chain of command, although the ADC reported to NORAD.

Engineering Significance

Like nearly all gap fillers, the Saugatuck annex was designed to be controlled remotely by the prime site via telephone lines and had no provisions for a permanent crew. The FPS-14 radar, ~~was~~ ~~a~~ Bendix ASR-3 airport surveillance radar, modified for unattended operation with ~~the~~ antenna,

⁵⁹ Memorandum, E05MI0140_01.08_0003, Army Corps of Engineers, June 18, 1991, Enclosure 1, para. 3

⁶⁰ Commercial Record, The, Saugatuck, Michigan, Saugatuck to Buy Dome on Mt. Baldhead, July 03, 1969, p. 1
News Palladium, Saugatuck Now Has Own Radar Station, September 13, 1969, p. 7

⁶¹ News Palladium, Hey! Leave Our Radar Installation Alone, July 25, 1969, p. 1

⁶² Environmental News, Calhoun County, Michigan, June 2006, U.S. Army Corps of Engineers, Former Saugatuck Gap Filler, p. 1

⁶³ AFHRA, micro film reel K0388, 781st AC&W Squadron History, frame 356

⁶⁴ AFHRA, micro film reel K0606, 781st Radar Squadron (SAGE) History, frame 888

⁶⁵ AFHRA, micro film reel K0603, 752nd Radar Squadron (SAGE) History, frame 1656

Deleted: ¶

During the period the Saugatuck Gap Filler Annex was in operation there were six SAGE prime site heavy radar facilities in service in Michigan and two direction centers; DC-06 at Fort Custer, as discussed above, and DC-14 at K.I. Sawyer Air Force Base south of Marquette in the Upper Peninsula.⁶⁶ responsible for the Sault Ste. Marie Air Defense Sector. Seventeen gap fillers were planned for Michigan but only eleven were actually built.⁶⁷ All of these SAGE facilities were built and in service in the same approximate time frame as the Saugatuck annex. There were a number of Air Force bases with interceptor aircraft in both the upper and lower peninsulas of Michigan and at least one Bomarc missile squadron just to the west of and under the responsibility of Kincheloe Air Force Base in the Upper Peninsula. In addition there were a score or so of United States Army Nike missile sites scattered about in the state, and a handful of army anti-aircraft artillery battalions positioned as the last defense around communities of high importance such as Detroit and the Soo Locks.¶

Formatted: Highlight

Deleted: and -18

Deleted: s

Deleted: were

Deleted: s

Deleted: s

Deleted: , The, Benton Harbor, Michigan

Deleted: (Air Force Historical Research Agency), 600 Chennault Circle, Maxwell AFB, AL 36112-6424

Deleted: Ibid

Deleted: Ibid,

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

redesigned to meet gap filler coverage requirements.⁶⁸ With the exception of equipment malfunctions, radar technicians only visited for a day or two of routine maintenance every week or so. To provide redundancy in the event of failures the site's primary electronic equipment, the initial AN/FPS-14 and later FPS-18 radar and the AN/FST-1 Coordinate Data Transmitter, each consisted of two identical sets that could be monitored, selected, and controlled remotely.

Deleted: two

Deleted: pieces of

Deleted: 8

The FPS-18 radar had fairly conservative capabilities, even for the era, apparently designed to closely match the limitations of the FST-1. The FPS-18's "range," the distance between the radar and a target, is generally reported to have been about sixty-five miles at its maximum, although anecdotal accounts and notes found on test equipment from the Saugatuck annex suggest it may have exceeded one hundred miles (Photos 34 & 35). The radar had a beam that fanned thirty degrees vertically with the lower edge elevated a half degree above the horizon to enable it detect any object from just above the lake's surface to a fairly high altitude while avoiding reflections from waves. Its specifications state it could detect a jet fighter sized aircraft at seventeen thousand feet altitude thirty-five miles away.⁶⁹ Range resolution, while unstated, was probably similar to that of the FPS-14's one-ninth of a mile. Horizontally the beam spread 1.4 degrees, which provided horizontal angular "azimuth" resolution of around one mile at sixty-five miles.

Deleted: been closer to

Radars transmit an extremely short pulse of radio frequency energy in a tight beam then measure the time required for it to reflect off any distant object and return. The speed of radio waves is known, so range is easily calculated from the time required for the round trip. Like all "search" radars of the era, the FPS-18 could discern only azimuth and range. Altitude was interrogated by a height finder radar at the prime site if an aircraft was determined to be of interest.

As the FPS-18 antenna rotated at 5.33 revolutions per minute the transmitter swept a continuous train of pulses across the horizon, each revolution taking just over 11 seconds and each pulse lasting one millionth of a second. The receiver streamed an analog signal containing any "returns" to the AN/FST-1 Coordinate Data Transmitter, along with a "north pulse" each time the antenna passed north. The antenna pedestal – the motorized mount on which the antenna rotated – was also equipped to send continuous position data via a device called a synchro, presumably to the FST-1. The FST-1 utilized electronics at the leading edge of the era's technology. It processed the raw analog data from the radar receiver, rejected stationary and spurious echoes to determine which were actual aircraft, then digitized and transmitted the data to the prime site via leased telephone lines. It was a combination analog and digital device, built primarily with vacuum tube technology. At its heart was the first modem ever used in an actual application and an RCA 6499 Radechon barrier grid storage vacuum tube, a device designed as computer memory and made available just prior to being incorporated into the FST-1.⁷⁰

Comment [NN(9)]: I realize you do state this later, but it may also be helpful to add in here that this is one full revolution in just over 11 seconds, perhaps in parenthesis.

Deleted: .

The FST-1 stored all of the radar returns from one rotation of the antenna into a circular grid of 256 azimuth sectors in the barrier grid storage tube, each representing 1.43°, basically the FPS-

⁶⁸ [Bendix Radio Foundation Oral History, Cramer Bacque interview, July 19, 2006, p. 24](#)

⁶⁹ MIL-HDBK-162A, Department of the Army Technical Manual TM 11-487C-1, Military Standardization Handbook, United States Radar Equipment, Volume 1, Section 1, December 15, 1965, Radar Set AN/FPS-18

⁷⁰ Grometstein, Alan, MIT Lincoln Laboratory - Technology in Support of National Security, 2011, Lincoln Laboratory, ISBN 9780615428802, p. 21

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

18's beam width. 256 is a common number in digital electronics, represented in one eight bit byte of binary data. The choice of 256 rather than 365 sectors is indicative of the digital nature of the FST-1. Each sector was divided into 64 "range blocks," the number 64 also common in binary math. One complete sweep of the antenna produced a total of 16384 digital bits of data, one bit for each of 64 range blocks in each of 256 sectors, all which had to be transmitted down the telephone lines in the 11.26 seconds it took the antenna to complete a revolution. The FST-1's modem could transmit at about 1600 bits per second which allowed just enough time to send all of the data before it was cleared from memory by the north pulse, ready for the next sweep.

While the FPS-18 had nominal range of 65 miles with resolution of around one-ninth of a mile, the FST-1 had a "presentation range" of only 48 miles, setting the actual limit for the range of the radar annex.⁷¹ Because there were only 64 range blocks, the FST-1 could record distance to a resolution of only about three-quarters of a mile. Thus, the gap filler reported the position of any target with an overall resolution averaging roughly just under one mile, range and azimuth, throughout most of its range.

Deleted: The

Deleted: but

Deleted: of

The resolution of the gap filler as a system does not seem very high by modern standards and the range of the FPS-18 radar was conservative even for its era, but the capability of the FST-1's digital electronics was pushing the technology of the day to the very edge despite being implemented primarily with vacuum tube technology. Most important, it was able to consistently and reliably alert SAGE to the presence and flight track of any aircraft in its range.

Deleted: it

Other Surviving SAGE Radar Installations

There is no official, available documentation regarding how many of the original gap filler annexes still exist in some form or another or, for that matter, how many were built. The most accurate tally of planned and remaining gap fillers is maintained by The Air Defense Radar Veterans' Association, an organization of United States and Royal Canadian Air Force veterans. The cofounder of this association states they have done the most complete research and are therefore the most authoritative source on cold war era radar sites and that there are only three gap filler annexes surviving externally intact,^{72,73} located at Saugatuck and Emery, Michigan, and Bridgewater, Maine.

Utilizing the Air Defense Radar Veterans' Association's database of gap filler installations and satellite and street level imagery available on the internet,⁷⁴ an exhaustive survey was conducted prior to preparation of this nomination to determine which of the approximately 240 gap filler sites originally planned still exist in any form in the United States and if the antenna tower and dome are present. Where internet imagery was inconclusive the locations were physically visited or owners or parties responsible for those sites were contacted to ascertain if the radar equipment

⁷¹ MIL-HDBK-162A, Department of the Army Technical Manual TM 11-487C-1, Military Standardization Handbook, United States Radar Equipment, Volume 1, Section 1, December 15, 1965, Coordinate Data Transmitting Set AN/FST-1

⁷² Page, Tom, cofounder radomes.org, email dated May 31, 2020

⁷³ Page, Tom, email dated August, 24, 2021

⁷⁴ <https://www.radomes.org/museum/acwgapfiller.php>, USAF CONUS Gap-Filler Radar Sites, document undated, accessed September 2021

Deleted: Ibid

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

was still present. Numerous other sources were also reviewed – published, online, and anecdotal – to add support to the conclusions presented here.

This investigation reveals the vast majority of gap filler sites have been demolished and most of those still existing have been repurposed for agricultural use or storage, a few as residences or offices. Surviving buildings are frequently altered to the degree they bear little or no resemblance to the original gap filler, and in most instances, the antenna tower has been removed. The tower is still present at a small number of these sites, but the radome remains in place on the tower at only three. The conclusion of this thorough research with available information is that, at most, only two gap filler annexes retain their radar equipment in place in the equipment and generator building, including Saugatuck which is the only one of those two in public ownership.

Deleted: research

Deleted: Most probably

Deleted: As a result

Deleted: , it is likely

Deleted: which

Deleted: still have the

The most likely candidate for another gap filler site that is nearly intact is that near Emery, Michigan, northeast of Ann Arbor. Physical visits to the site reveal that, externally, it is very complete. The radome is on the tower, although in very poor condition. This indicates the antenna is nearly certainly still in place because the radome would have to be at least partially dismantled to remove the antenna. All original wall mounted ventilation hoods and louvers that could be observed are still in place as are the original doors, but the ventilators that are prominent on the roof of most gap filler buildings are absent. With that exception, every indication suggests the radar equipment is potentially still in place in the building, but numerous attempts to contact the private owner to determine this were not successful.

Another possibly complete site is the gap filler annex located on Number 9 Mountain near Bridgewater, Maine, where building, tower, and dome are present and in fair condition. The tower is not typical of gap fillers, having four legs and a fire look-out cabin at the top, just beneath the radome. The equipment and generator building is now used to house Maine's state radio operations equipment. An email from the emergency services director of the county in which the gap filler is located states it is his understanding the original equipment has long since been removed.⁷⁵ Although attempts to verify this with state personnel were not successful, the number of modern radio antennas mounted on the building and tower suggest the need for substantial floor space to accommodate the associated radio equipment. A fairly contemporary peaked roof installed over the rear half of the equipment room closest to the tower and non-standard heating and ventilation equipment also evident on that portion of the building, all strongly suggest the radar equipment has been removed to make room for radio equipment.

The gap filler near Andes, New York, was considered by some sources to be fairly complete. It is not included among the potentially intact three sites, above, but discussed here to eliminate any ambiguities. Satellite imagery and inspection of the site reveal the radome and antenna, while still on site, are not in place on the tower. A serviceman with the 2861st GEEIA stated he participated in the removal of the radar equipment from this location.⁷⁶ Information provided by

Deleted: Communications with

⁷⁵ Woods, Darren, Director, Aroostook County Emergency Management, Caribou, Maine, email dated January 9, 2019

⁷⁶ Sibel, Vince, 2861st GEEIA Message Board, entry April 29, 2007, Andes FPS-18 removal

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

the present owner, including a hand sketch of alterations to the equipment room to accommodate county radio equipment, firmly establish the radar equipment is no longer in place.⁷⁷

Subsequent History

A period of heightened public interest followed Saugatuck's purchase of the radar in 1969 but quickly faded. Marine communications equipment on the tower took the place of grand plans such as a viewing platform. Reduced to storage of maintenance materials for the park's stairs and deck, the annex was left to weather the years in benign neglect. By the 1990s a fair amount of equipment and small items had been removed from the building both by souvenir collectors and by those protecting it from being lost and from the leaking roof. In 2009 the stairs built on the east side of the dune during construction of the annex were replaced with the current set.⁷⁸ By the late 2010s the electronics cabinets were rusting badly and Saugatuck was considering demolition of the building.

In 2016 the annex was the subject of a well attended presentation at the Saugatuck-Douglas History Center. It then took a central place in the 2017 and 2018 History Center museum exhibits with a display of restored equipment and a visit by an United States Air Force technician who serviced the radar during the early 1960s (Photo 35). Saugatuck again considered demolition of the building mid 2020, actually setting aside funds for the purpose, but concerned residents alerted the city to the historic importance of the site and a workgroup was commissioned by the city to stabilize the site and examine alternatives for its future. Heavy vegetation that was overtaking the grounds and structures was removed, security was improved, and temporary repairs were made to the roof and walls. The public was solicited for return of objects removed from the annex resulting in a number of important artifacts being recovered. As of the writing of this nomination (June 2022) a 501(c)(3) nonprofit is being organized to accept funds with which to address the shifting foundation and perform long term repairs on the roof.

Conclusion

Like Michigan's treasured Fort Mackinac and its roll in military conflicts in the 18th and 19th centuries, the Saugatuck Gap Filler Radar Annex is a mid-20th century example of the national strategic importance of the Great Lakes region and one of the few intact outposts of the Cold War displaying the rapid advances in technology that have shaped the world we know today.

The annex was only a small part of the immense continent wide Cold War SAGE system when it was in operation, but it is now one of, at most, two SAGE system radar sites of any type with nearly all of the original equipment in place in the original location and the only such site in public hands.

Deleted: Throughout the period the Saugatuck Gap Filler Annex was in operation, SAGE was NORAD's eyes and ears,⁷⁹

Deleted: .

Deleted: constantly alert for Soviet bombers approaching the North American continent. While t

Deleted: .

Deleted: one of only four remaining SAGE system radar sites that retain their cold war era features externally intact in their original location. The Saugatuck annex is

Deleted: gap filler radars

Deleted: one

⁷⁷ Bartlem, David, owner of gap filler, Andes, New York, email dated March 24, 2017

⁷⁸ Hamilton Herald, The, September 4, 2009, Plaggemars builds Mount Baldhead stairs

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

~~Described as “a real museum” by a respected cold war radar expert,⁸⁰ the annex and the AN/FPS-18 radar and associated equipment offer the only public opportunity to study details, in situ or otherwise, of the technology and construction of Cold War era radar transmitters, receivers, and associated electronics and the structures that housed them. Of specific importance are the remaining portions of the AN/FST-1 Coordinate Data Transmitter, an artifact representing the bridge between vacuum tube analog electronics, digital electronics, and the computer era.~~

~~Once a stern sentinel, the annex now stands in solitary testimony to a vanished era. But much more than that, the Saugatuck Gap Filler Annex is a historic military artifact of national significance, a frozen snapshot of Cold War air defense technology.~~

Deleted: The domed tower of the Saugatuck Gap Filler Annex exemplifies the stark utilitarian structure of Cold War radar facilities that were spread across the northern United States border and are now gone. While perhaps a dozen of the towers still exist, there are only two of the standard three legged towers in existence with the radome still in place at the top and the antenna within. Saugatuck’s tower is one of these completely intact examples of this distinctive architecture which once could be seen standing solemnly on high points of the horizon the breadth of the nation.¶

Deleted: The

Deleted: which remain in the equipment room at the Saugatuck Gap Filler Annex are the last of their type available for public study. The only other set which might still be in place is in private hands and its actual existence uncertain. Described as “a real museum” by an expert on the genre⁸¹, the equipment in the Saugatuck annex

Deleted: s

Deleted: gap filler

Deleted: of, perhaps, the most intense period of the Cold War

Deleted: SAGE was a marvel of electronic and digital technology, a nationwide system of which there are now few remnants. Saugatuck’s Gap Filler Annex stands as, at most, one of the last two nearly complete representatives of this incredible engineering feat.¶

Deleted: The stark white radome at the top of the antenna tower is an iconic landmark clearly visible for many miles in all directions, used as a navigational aid for mariners far from shore seeking Saugatuck or nearby ports.

Deleted: the

Deleted: and the transition from analog to digital

⁸⁰ Page, Tom, cofounder radomes.org, email dated August, 25, 2021

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property

County and State

9. Major Bibliographical References

Bibliography (Cite the books, articles, and other sources used in preparing this form.)

Publications:

Bashe, Charles and Lyle Johnson, John Palmer, Emerson Pugh
IBM's Early Computers, 1986
MIT Press, ISBN 0262022257

CMH

Center of Military History, United States Army
History of Strategic Air and Ballistic Missile Defense: Volume I 1945-1955, 1975
History of Strategic Air and Ballistic Missile Defense: Volume 2 1956-1972, 1975

Freeman, Eva C. ed.

MIT Lincoln Laboratory - Technology in the National Interest, 1995
Lincoln Laboratory, ISBN 0964572001

Grometstein, Alan A. ed.

MIT Lincoln Laboratory - Technology in Support of National Security, 2011
Lincoln Laboratory, ISBN 9780615428802

Lane, Kit

The Wreck of the Hippocampus and Other Tales of Saugatuck, 1992
Pavilion Press, ISBN 1-877703-22-2

Redmond, Kent and Thomas Smith

Project Whirlwind: The History of a Pioneer Computer, 1980
Digital Equipment Corporation ISBN 0932376096

Redmond, Kent and Thomas Smith

From Whirlwind to Mitre: The R&D Story of The SAGE Air Defense Computer, 2000
MIT Press, ISBN 0262182017

Schaffel, Kenneth

The Emerging Shield: The Air Force and the Evolution of Continental Air Defense 1945-1960, 1991, Office of Air Force History, ISBN 0912799609

Ulmann, Bernd

AN/FSQ-7: The Computer That Shaped The Cold War, 2014
Oldenbourg Wissenschaftsverlag GmbH, ISBN 9783486727661

Deleted: Winkler, David F., and Julie Webster¶
Searching the Skies - The Legacy of the United
States Cold War Defense Radar Program,¶
1997, United States Air Force Air Combat
Command¶

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

Internet resources:

radomes.org

Tom Page, and Gene McManus
Information for Saugatuck, MI,
<https://www.radomes.org/museum/showsite.php?site=Saugatuck,+MI>
Document undated; accessed September 2021

USAF CONUS Gap-Filler Radar Sites, (AN/FPS-14 and AN/FPS-18), 1957 - 1970
<https://www.radomes.org/museum/acwgapfiller.php>
Document undated; accessed September 2021

fortwiki.com

John Stanton, 2018 "Custer Air Force Station"
http://fortwiki.com/Custer_Air_Force_Station
Document revised July 2021, accessed September 2021

Included on nomination CD:

Aircraft Flash, The

Official G.O.C. Magazine, Vol. 7, No. 2, October 1958

[Aircraft Flash Official GOC Magazine Vol 7 No 2, October 1958.pdf](#)
[Aircraft Flash Sage System Radar Sites & Sector Boundaries map. p 4 06-16-58.pdf](#)

Deleted: See also, Sage System Radar Sites & Sector Boundaries chart 06-16-58.jpg

Air Force Historical Research Agency (AFHRA)

600 Chennault Circle, Maxwell AFB, AL 36112-6424

[AFHRA microfilm reel K0388 781st AC&W Squadron Ft. Custer Jan 58 thru Sep 59.pdf](#)
[AFHRA microfilm reel K0606 781st Radar Squadron \(SAGE\) Oct 59 thru Jun 65.pdf](#)
[AFHRA microfilm reel K0603 752nd Radar Squadron \(SAGE\) Sep 60 thru Sep 70.pdf](#)

Deleted: K0388, microfilm reel, 781st AC&W Squadron History

Deleted: K0606, microfilm reel, 781st Radar Squadron (SAGE) History

Deleted: K0603, microfilm reel, 752nd Radar Squadron (SAGE) History

Bartlem, David

Bartlem, David, owner Andes NY gap filler, email, no equipment 03-24-17.[pdf](#)
Bartlem, David, 625 Herr Road GAF plan view 03-24-17.[pdf](#)

[Bendix Radio Foundation](#)

[Bendix Radio Foundation, Bacque Transcript 2006, FPS-14 based on ASR-3.pdf](#)

Commercial Record, The, Saugatuck, Michigan

[Commercial Record 1956 June 8 p 1, We get more than we give.pdf](#)
[Commercial Record 1956 September 28 p 1, Progress report.pdf](#)
[Commercial Record 1956 November 9 p 1, New Pole For Xmas Star.pdf](#)
[Commercial Record 1957 December 13 p 1, Mount Baldy Star To Shine Again.pdf](#)
[Commercial Record 1958 December 12 p 1, Star Shining on Mount Baldy Thanks to Scouts.pdf](#)
[Commercial Record 1968 December 19 p 8, Observations, no power for star.pdf](#)
[Commercial Record 1969 July 3 p 1, Saugatuck to Buy Dome on Mt. Baldhead.pdf](#)

Deleted: June 8, 1956, We get more than we give

Deleted: September 28, 1956, Progress Report

Deleted: November 9, 1956, New Pole For Xmas Star

Deleted: December 13, 1957, Mount Baldy Star To Shine Again

Deleted: December 12, 1958, Star Shining on Mount Baldy Thanks to Scouts

Deleted: December 19, 1968, Observations, no power for star

Deleted: July 3, 1969, Saugatuck to Buy Dome on Mt. Baldhead

[Cornett, Lloyd and Mildred Johnson](#)

[A Handbook of Aerospace Defense Organization 1946-1980, December 31, 1980 Office of History, Aerospace Defense Center, Peterson AFB](#)
[Cornett, Johnson, A Handbook of Aerospace Defense Organization 1946-1980.pdf](#)

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

Davis, Phillip and Albert Cohen, staff, MIT Lincoln Laboratory
Rigid Radome Design Considerations, Electronics Magazine, April 17, 1959,
Vol. 32, No. 16, McGraw-Hill
[Electronics-1959-04-17, CW-413 FPS -18 dome dims p. 66.pdf](#)

[Hamilton Herald, The](#)
[Hamilton Herald-Holland Sentinel 2009 September 4 Plaggemars builds Mount Baldhead stairs.pdf](#)

Holland Sentinel, The
[Holland Sentinel 2013 January 15, Saugatuck council thanks Birkholz for star.pdf](#)

Deleted: , Holland, Michigan, January 15, 2013

News Palladium, The, Benton Harbor, Michigan
[News-Palladium 1969 July 25 p 1, Air Force dismantling radar.pdf](#)
[News Palladium 1969 September 13 p 7, Saugatuck buys radar.pdf](#)

Deleted: July 25, 1969

Deleted: September 13, 1969

[NORAD](#), Historical Reference Paper No. 11
Nineteen Years of Air Defense, Directorate of Command History, Headquarters NORAD
May 1, 1965
[NORAD, Paper No 11 Nineteen Years of Air Defense \(1965\) Full Release.pdf](#)

[Page, Tom](#)
[Page, Tom, Radomes.org, various emails 08-31-21.pdf](#)
[Tom Page, Cofounder of The Air Defense Radar Veterans' Association and radomes.org](#)

Deleted: ¶

Deleted: , various emails 08-31-21.docx

radomes.org
[www.radomes.org_museum_acwgapfiller.php Gap Filler Radar Systems 09-02-21.pdf](#)
[www.radomes.org_museum_showsite.php_site=Saugatuck,+MI 10-05-21.pdf](#)

Deleted: https_www.radomes.org_museum_acwgapfiller.php Gap Filler Radar Systems 09-02-21.pdf

Deleted: https://www.radomes.org/museum/showsite.php?site=Saugatuck,+MI

Sibel, Vince
[Sibel, Vince, 2861st GEEIA Message Board, Andes FPS-18 removal 4-2007.pdf](#)

Deleted: 2861st GEEIA Message Board, Andes FPS-18 removal 4-2007.pdf

[United States Army Center of Military History](#)
[History of Strategic Air and Ballistic Missile Defense, Volume I 1945-1955, U.S. Army Center of Military History](#)
[U.S. Army Center of Military History, History of Strategic Air and Missile Defense 1945-55.pdf](#)

[United States Army, MIL-HDBK-162A](#)
Department of the Army Technical Manual TM 11-487C-1, Military Standardization Handbook United States Radar Equipment, Volume 1, Section 1, December 15, 1965
[MIL-HDBK-162A, TM-11-487C-1, 15 December 1965 Extract FPS-14.pdf](#)
[MIL-HDBK-162A, TM-11-487C-1, 15 December 1965 Extract FPS-18.pdf](#)
[MIL-HDBK-162A, TM-11-487C-1 15 December 1965 Extract FST-1.pdf](#)
[MIL-HDBK-162A, TM-11-487C-1 15 December 1965 Extract FSW-1.pdf](#)

Deleted: Memorandum¶
E05MI0140_01.08_0003, U.S. Army Corps of Engineers, June 18, 1991¶

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property County and State

USACE (United States Army Corps of Engineers), Louisville District

[USACE, Environmental News, Former Saugatuck Gap Filler, 172101-0807, June 2006.pdf](#)

Calhoun County, Michigan, June 2006, U.S. Army Corps of Engineers,
Former Saugatuck Gap Filler, p. 1

Deleted: Environmental News, June 2006

[USACE, Memorandum E05MI0140_01.08_0003 a August 27, 1991.pdf](#)

Deleted: Memorandum E05MI0140_01.08_0003,
June 18, 1991

Woods, Darren

[Woods, Darren, email, Bridgewater equipment removed 01-09-19.pdf](#)

[Darren Woods](#), Director, Aroostook County Emergency Management, Caribou, Maine

Deleted: , email, Bridgewater equipment removed
01-09-19.pdf

[Winkler, David F., and Julie Webster](#)

[Searching the Skies - The Legacy of the United States Cold War Defense Radar Program,](#)

[1997, United States Air Force Air Combat Command](#)

[Searching the skies, the legacy of the United States Cold War defense Radar Program 1997](#)

[OCR'd.pdf](#)

Previous documentation on file (NPS):

- preliminary determination of individual listing (36 CFR 67) has been requested
 previously listed in the National Register
 previously determined eligible by the National Register
 designated a National Historic Landmark
 recorded by Historic American Buildings Survey # _____
 recorded by Historic American Engineering Record # _____
 recorded by Historic American Landscape Survey # _____

Primary location of additional data:

- State Historic Preservation Office
 Other State agency
 Federal agency
 Local government
 University
 Other

Name of repository: Saugatuck-Douglas History Center
130 West Center Street, Douglas, Michigan 49406

Historic Resources Survey Number (if assigned): _____

Saugatuck Gap Filler Annex
Name of Property County and State

Allegan County, MI

10. Geographical Data

Acreage of Property 0.2 acres

Use either the UTM system or latitude/longitude coordinates

Latitude/Longitude Coordinates (decimal degrees)

Datum if other than WGS84: _____

(enter coordinates to 6 decimal places)

- | | | |
|------------------------|-----------------------|-----------------------|
| 1. Latitude: 42.661250 | Longitude: -86.209083 | Center of annex site. |
| 2. Latitude: | Longitude: | |
| 3. Latitude: | Longitude: | |
| 4. Latitude: | Longitude: | |


Verbal Boundary Description (Describe the boundaries of the property.)

Boundaries are those of the security fence depicted in the sketch below.

Saugatuck Gap Filler Annex
Name of Property

County and State

Allegan County, MI

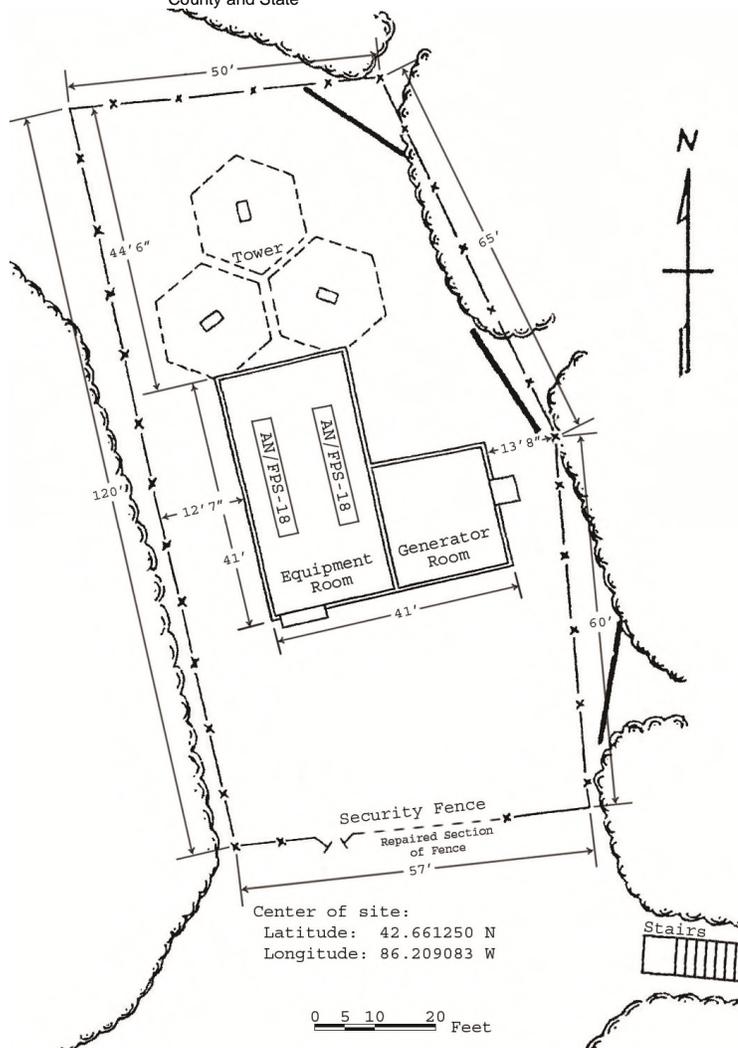

Boundary Justification (Explain why the boundaries were selected.)

The security fence is original to the radar annex and precisely defines the boundaries of the area of historical interest. Per Allegan County Geographic Information System, the Saugatuck Gap Filler Annex straddles two large parcels owned by the City of Saugatuck which have not been subdivided, thus there is no legal description of the area occupied by the annex and no survey or other description has been found.

Saugatuck Gap Filler Annex
Name of Property County and State

Allegan County, MI

11. Form Prepared By

name/title: Chuck Gustafson and Paula Bedford, Members
Eric F Gollanek, PhD, Executive Director

organization: Saugatuck-Douglas History Center

street & number: 130 W. Center Street

city or town: Douglas state: MI zip code: 49406

e-mail: mechanique@wmol.com (Chuck)
pgbedford1368@gmail.com (Paula)
director@sdhistoricalsociety.org (Eric)

telephone: Chuck 269-857-1218
Paula 734-646-2706
Eric 269-857-5751

date: 06-30-22

Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property

County and State

Additional Documentation

Submit the following items with the completed form:

- **Maps:** A USGS map or equivalent (7.5 or 15 minute series) indicating the property's location.
- **Sketch map** for historic districts and properties having large acreage or numerous resources. Key all photographs to this map.
- **Additional items:** (Check with the SHPO, TPO, or FPO for any additional items.)

Comment [C10]: Ensure maps satisfy GIS_Guidance_2013_05_15.pdf
Current as of 03-15-22

Add stairs/deck per NN




Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property

County and State

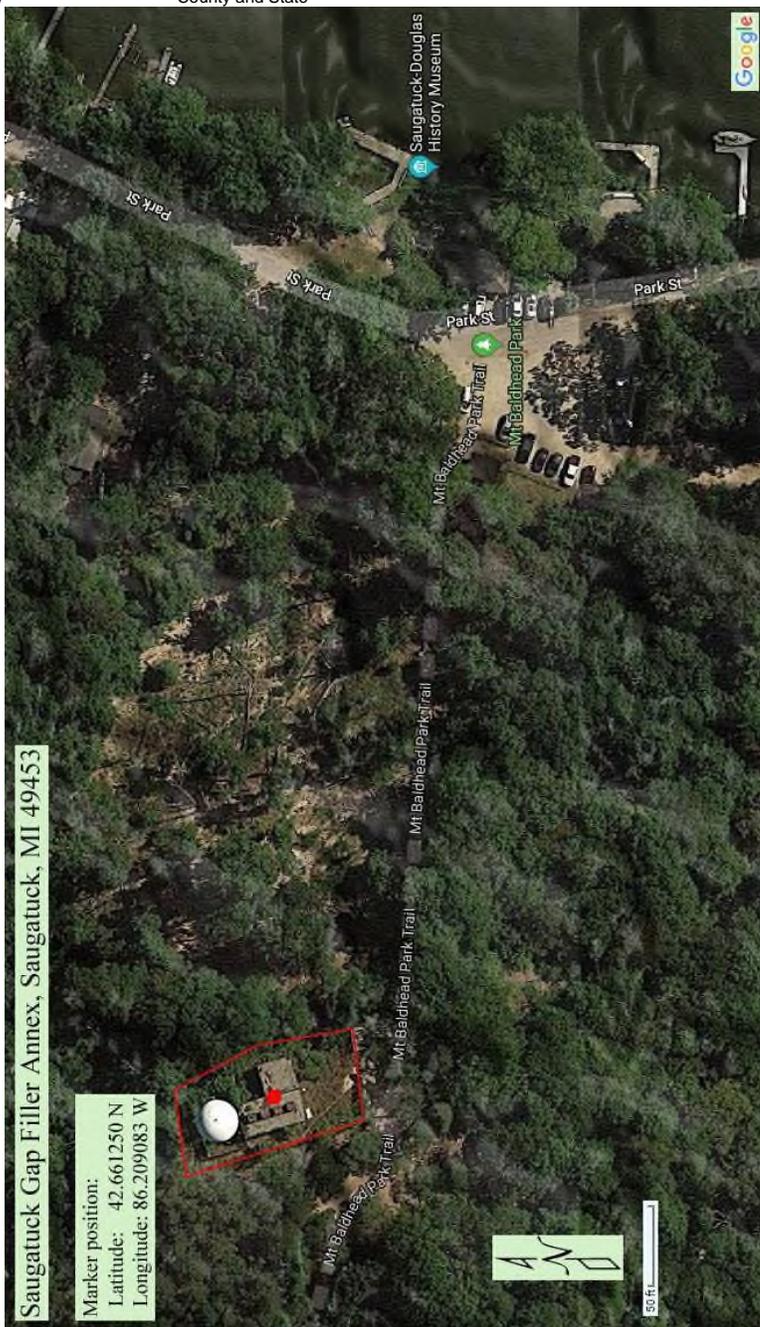


Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property

County and State

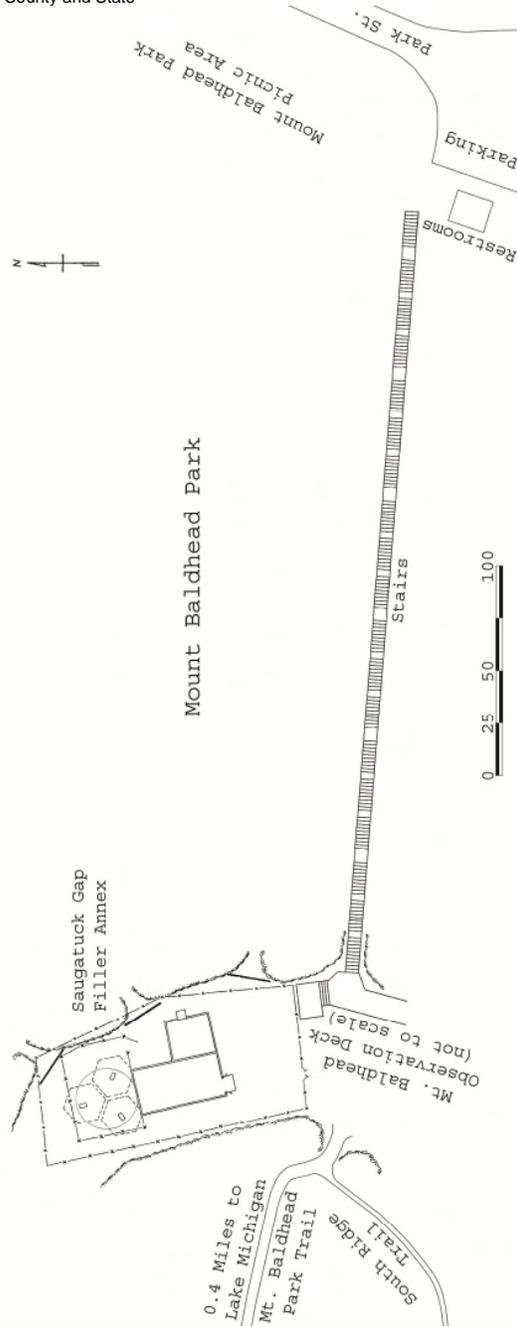

Saugatuck Gap Filler Annex
 Name of Property County and State

Allegan County, MI



Saugatuck Gap Filler Annex

Allegan County, MI

Name of Property

County and State

Photographs

Submit clear and descriptive photographs. The size of each image must be 1600x1200 pixels (minimum), 3000x2000 preferred, at 300 ppi (pixels per inch) or larger. Key all photographs to the sketch map. Each photograph must be numbered and that number must correspond to the photograph number on the photo log. For simplicity, the name of the photographer, photo date, etc. may be listed once on the photograph log and doesn't need to be labeled on every photograph.

Photo Log

Name of Property: Saugatuck Gap Filler Annex

City or Vicinity: Saugatuck

County: Allegan State: Michigan

Photographers: Chuck Gustafson unless otherwise noted,
John Kerr, Allegan County Sheriff's Office (ACSO)

Date Photographed: Various dates 2017 and January through June, 2022

Location of Original Digital Files: Saugatuck-Douglas History Center
130 W Center St, Douglas, MI 49406

- | | | |
|----------|--|-----------------------|
| 1 of 35. | MI_Allegan County_Saugatuck Gap Filler Annex_0001 | April 12, 2022 |
| | Radar antenna tower and equipment and generator building, from intersection of Mason and Water streets, Saugatuck | |
| 2 of 35. | MI_Allegan County_Saugatuck Gap Filler Annex_0002 | April 12, 2022 |
| | Pump House Museum, Mt. Baldhead Park, picnic pavilion, stairs, and radar annex, from directly east across Kalamazoo River | |
| 3 of 35. | MI_Allegan County_Saugatuck Gap Filler Annex_0003 | April 23, 2022 |
| | Mt. Baldhead Park parking area, stairs, and radar annex, from slightly south of east on Park Street | |
| 4 of 35. | MI_Allegan County_Saugatuck Gap Filler Annex_0004 | April 12, 2022 |
| | Mt. Baldhead Park observation deck and stairs foreground, Mt. Baldhead Park Trail left with Lake Michigan in background, radar annex ahead, from south | |
| 5 of 35. | MI_Allegan County_Saugatuck Gap Filler Annex_0005 | ACSO January 28, 2022 |
| | Aerial view, Saugatuck Gap Filler Annex, from northwest | |
| 6 of 35. | MI_Allegan County_Saugatuck Gap Filler Annex_0006 | ACSO January 28, 2022 |
| | Aerial view, Saugatuck Gap Filler Annex, from slightly west of south | |
| 7 of 35. | MI_Allegan County_Saugatuck Gap Filler Annex_0007 | ACSO January 28, 2022 |
| | Aerial view, Saugatuck Gap Filler Annex, from directly overhead | |

<u>Saugatuck Gap Filler Annex</u>		<u>Allegan County, MI</u>
<u>Name of Property</u>	<u>County and State</u>	
8 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0008 Front of equipment and generator building, from south		June 23, 2022
9 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0009 Closer view of antenna tower, from southeast		April 12, 2022
10 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0010 Generator room exterior, ventilator openings, door, from southeast		June 14, 2022
11 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0011 Generator room east exterior wall and door, from east		April 12, 2022
12 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0012 Equipment room east exterior wall, antenna tower security fence, from southeast		June 14, 2022
13 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0013 Generator room north and equipment room east exterior walls, from northeast		June 14, 2022
14 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0014 View of wooden retaining wall, annex perimeter fence, antenna tower fence, tower base, equipment and generator building, from north		April 12, 2022
15 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0015 Tower security fence from northwest corner of perimeter fence		June 27, 2022
16 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0016 Equipment room north wall, cooling units, from north beneath tower		June 14, 2022
17 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0017 View of antenna tower, from slightly south of west		June 23, 2022
18 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0018 Equipment room west wall, from slightly north of west		June 14, 2022
19 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0019 Equipment and generator building, west fence line, antenna tower security fence, antenna tower, from southwest		June 27, 2022
20 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0020 Equipment room from door, foreground to background; telephone cabinet, opening to generator room, FSW-1 Control Monitor Set, FPS-18 cabinet rows, FPS-18 Control Monitor, voltage regulating transformer (west/left wall), one of two		June 14, 2022
21 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0021 Equipment room, two rows of redundant FPS-18 radar equipment Cabinets, A-Channel on right, B-Channel on left, with receivers closest, FPS-18 control monitor near far north wall, from south		June 27, 2022

Saugatuck Gap Filler Annex		Allegan County, MI
Name of Property	County and State	
22 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0022	June 14, 2022	
A-Channel FPS-18 radar receiver, from west		
23 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0023	June 14, 2022	
A-Channel FPS-18 radar transmitter, from west		
24 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0024	June 27, 2022	
Equipment room from north, foreground; transmitter power supplies, transmitters, receivers and other cabinets not clearly visible. Background right to left; door, telephone equipment cabinet with doors open and relatively modern computer monitor in front, modern computer equipment cabinet		
25 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0025	April 12, 2022	
Generator room, rotary regulator motor generators and control panel, access hole in wall to equipment room, from east		
26 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0026	April 12, 2022	
Generator room, foreground to background from west; rotary regulators, diesel generator cooling air intake, fuel pumps beyond on floor, steel plate filling door opening, diesel fired water heater left corner		
27 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0027	April 12, 2022	
View from antenna tower, third landing, looking slightly east of south; star, equipment and generator building roof, southwest wooden retaining wall with Mt Baldhead Park Trail to Oval Beach just beyond descending to right, Mt Baldhead Park observation deck, and stairs descending left		
28 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0028	Kerr	May 7, 2022
Interior of radome from door on south quadrant of antenna deck: relatively modern cellular phone and microwave antennas foreground; FPS-18 radar antenna reflector, frame, rotating pedestal, and drive motor beyond with non-original ladder to hatch; fiberglass radome panels background, sunlight filtering through areas of missing exterior paint		
29 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0029	Kerr	May 7, 2022
Interior of radome from northwest, relatively modern communications equipment strewn and mounted here and there, sliding door – nearly closed – barely visible as horizontal white line on floor in background		
30 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0030	April 12, 2022	
Radar antenna reflector from west inside radome		
31 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0031	June 16, 2022	
Radome fiberglass panel identifying numbers, bottom section		
32 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0032	June 16, 2022	
Radome fiberglass panel identifying numbers, middle section		

<u>Name of Property</u>	<u>County and State</u>
Saugatuck Gap Filler Annex	Allegan County, MI
33 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0033 Radome fiberglass panel identifying numbers, top section	June 16, 2022
34 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0034 Permanent Echo chart on Range & Azimuth Indicator, a diagnostic tool used with the FPS-18 radar at the Saugatuck annex. Chart notes degrees azimuth to fixed objects returning "permanent echos," azimuth counter pulses (ACP) to same, and range in miles. Observe that longest range is 165 miles, well beyond radar's rated maximum range. This data was used to verify the radar was correctly displaying the range and azimuth to know fixed objects	April 18, 2017
35 of 35. MI_Allegan County_Saugatuck Gap Filler Annex_0035 Range & Azimuth Indicator from annex in 2017-18 Saugatuck-Douglas History Center museum exhibit with Permanent Echo chart taped to front table by 1960s radar technicians	May 24, 2017

Paperwork Reduction Act Statement: This information is being collected for applications to the National Register of Historic Places to nominate properties for listing or determine eligibility for listing, to list properties, and to amend existing listings. Response to this request is required to obtain a benefit in accordance with the National Historic Preservation Act, as amended (16 U.S.C.460 et seq.).

Estimated Burden Statement: Public reporting burden for this form is estimated to average 100 hours per response including time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding this burden estimate or any aspect of this form to the Office of Planning and Performance Management, U.S. Dept. of the Interior, 1849 C. Street, NW, Washington, DC.

Two Direction Centers were located in Michigan DC-06 at Custer Air Force Station near Battle Creek in the Lower Peninsula to which the Saugatuck Gap Filler Annex would eventually report, and DC-14 at K.I. Sawyer Air Force Base south of Marquette in the Upper Peninsula. When it first became operational DC-06 was responsible for coverage of the Detroit Air-Defense Sector which included Michigan's southern over eninsula and portions of Indiana and Ohio.¹ As with all Direction Centers, DC-06's sector of responsibility and the number of radars feeding data to it was changing.

SAGE initially operated under the command of United States Continental Air Defense Command (CONAD), then the North American Air Defense Command (NORAD), after its creation on May 12, 1958. NORAD had command of all air defenses in the United States and Canada. The resources under control of SAGE during an attack on the North American continent varied continuously across the period it was operational. Ultimately, SAGE was authorized to take command of more than forty squadrons totaling hundreds of interceptor aircraft from the Strategic Air Command fighter escort wings, Tactical Air Command, Air Defense Command, and, under NORAD, the Royal Canadian Air Force². In addition, during an attack the SAGE system would direct the Army's anti-aircraft artillery batteries, arrayed around scores of high importance targets, and provide targeting data to their Nike missiles at over one hundred sites in North America. SAGE also had exclusive control of sixteen Bomarc missile batteries³.

Despite the array of resources available to it, SAGE was helpless against the ICBM. Its radars were not designed to detect objects in space and, even had they been able to, lacked the range to provide sufficiently advanced warning of missiles approaching at speeds exceeding ten thousand miles per hour. Regardless, SAGE was felt to be an essential component of NORAD, being its only resource able to detect a wave of attack by Soviet nuclear bombers which strategists had determined was likely to follow an initial nuclear missile strike.

To augment the Permanent System heavy radars around 240 gap filler radar sites were planned between 1956 to 1962. Not all of those were constructed and, even if actually built, not all had the radar equipment and tower installed. As funding was reduced due to emphasis shifting toward missile defense in the early 1960s production of radar sets decreased and equipment was often transferred from existing installations to newer gap filler locations that offered some advantage. Ultimately, a maximum of 131 gap fillers were in service at any one time,⁴ the Saugatuck Gap Filler Annex among them.

¹ Aircraft Flash, The, Official G.O.C. Magazine, Vol. 7, No. 2, October 1958, Sage System Radar Sites & Sector Boundaries map 06-16-58, p. 4

² Winkler, David et al., Searching the Skies - The Legacy of the United States Cold War Defense Radar Program, 1997, United States Air Force Air Combat Command, p. 37

³ Historical Reference Paper No. 11, Nineteen Years of Air Defense, Directorate of Command History, Headquarters NORAD, May 1, 1965, p. 28

⁴ Winkler, David et al., Searching the Skies - The Legacy of the United States Cold War Defense Radar Program, 1997, United States Air Force Air Combat Command, p. 36