









SHACKLES TO BE 2 1/2 AND 1
3/4 DEPENDING ON HOLE SIZE.
SUPPLIED BY TOWING CO.

EYE BOLTS TO BE 1 1/2 DIA
THREAD MIN. WITH PROPER ADAPTER
HARDWARE TO HOLE SIZE.
SUPPLIED BY MMSD, CROSBY S-279
UNC S/N 9900271 OR LARGER.

WR - 1/2 DIA WIRE ROPE MIN.
SR - 3/4 DIA LOW STRETCH SYNTHETIC
ROPE MIN.

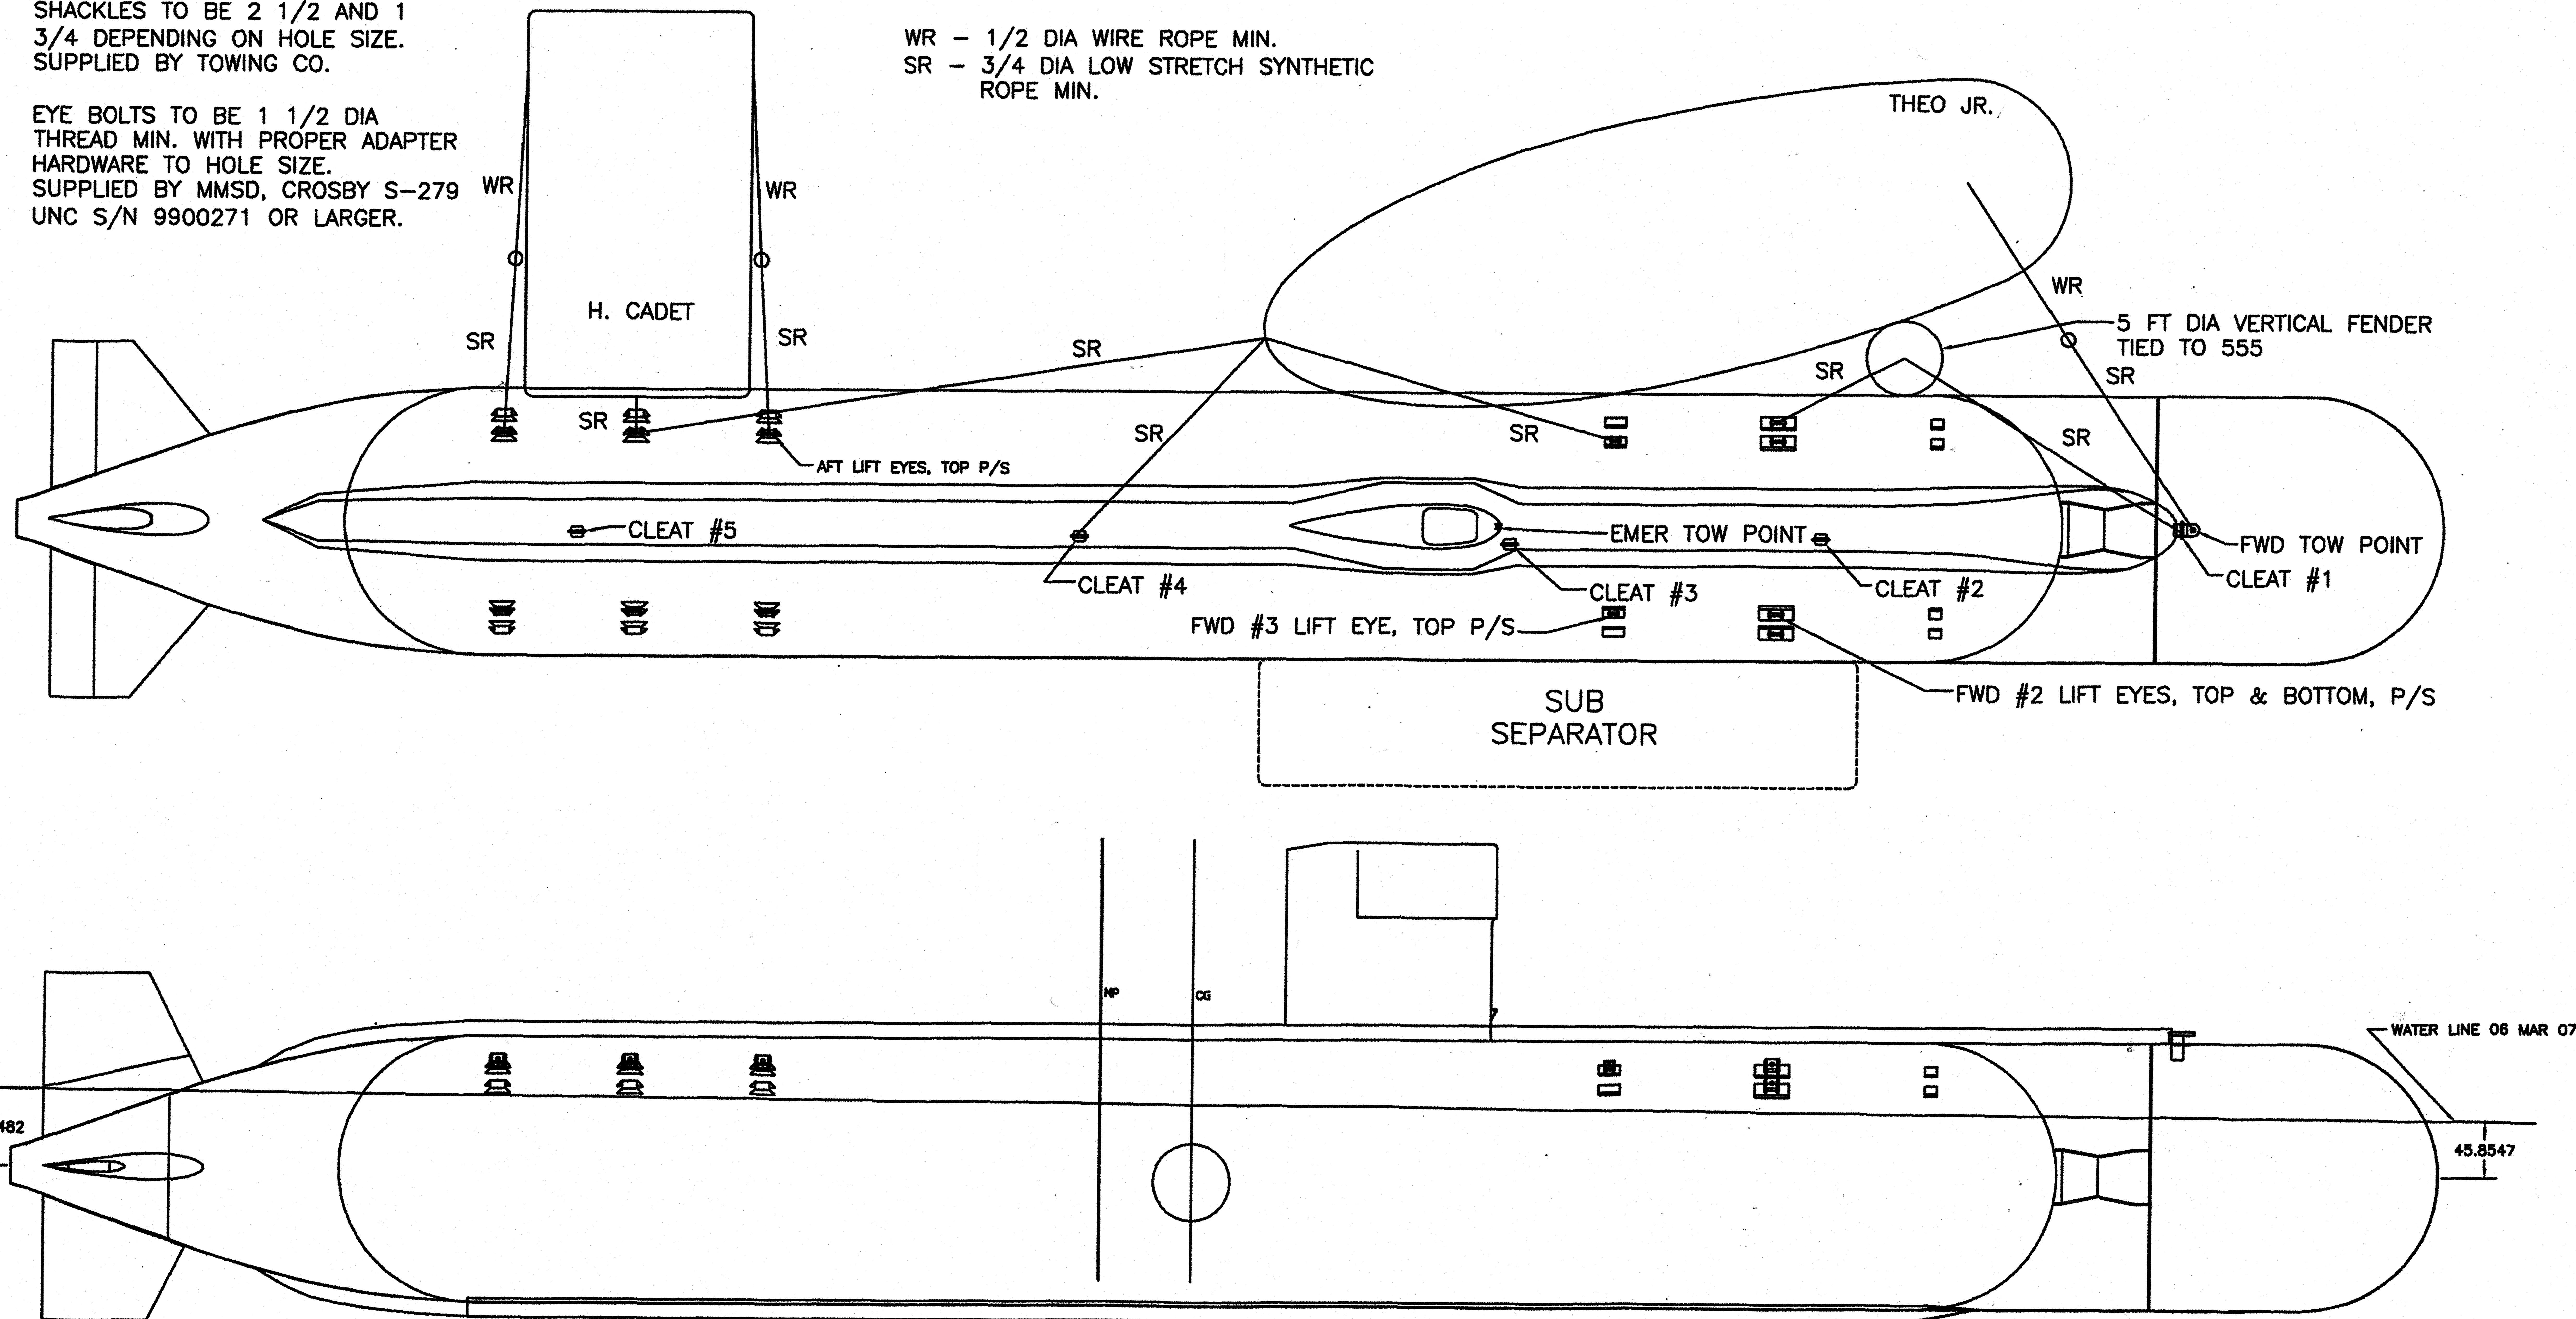

USS DOLPHIN TOW PLAN ARRANGEMENT

