

- ① LASH HEAD & THROAT.
- ② BRAIL HOLES SPACED 9".
- ③ CLEW BLOCK FOR OUTHAUL.
- ④ TACK LASHINGS OR LINES.
- ⑤ HEAD LASHINGS TO GAFF.
- ⑥ HOOP LASHINGS SPACED 3".
- ⑦ LOOSE FOOT (WIRE?).
- ⑧ HALYARD BLOCKS & DOWNHAUL EYES.
- ⑨ DOWNHAUL THIMBLES.
- ⑩ LASHINGS TO THIMBLE SLIDES.
- ⑪ CLEW HOLES FOR SHEET BLOCKS & PENDANTS.
- ⑫ TACK SHACKLE TO JIBBOOM SLIDE RING.
- ⑬ WIRE LUFF.
- ⑭ PISTON MARKS TO SLIDE RINGS ON STAY.




FORE & AFT SAILS

	LUFF	LEACH	HEAD	FOOT	THROAT TO CLEW
SPANKER	17'9"	33'8"	27'0"	33'0"	34'6"
MIZZEN STAYSAIL	32'0"	21'6"		21'6"	
MIZZEN TOPMAST STAYSAIL	16'2"	40'0"	32'0"	18'10"	24'0"
MAIN STAYSAIL	50'0"	30'2"		30'2"	
MAIN TOPMAST STAYSAIL	12'0"	48'0"	50'0"	24'0"	27'5"
MAIN TOPGALLANT STAYSAIL	9'6"	50'0"	48'0"	23'5"	28'6"
FORE STAYSAIL	35'0"	30'6"		23'3"	
FORE TOPMAST STAYSAIL	50'0"	41'10"		25'0"	
FLYING JIB	60'0"	35'9"		33'7"	


SQUARE SAILS

	HEAD	FOOT	DROP	GORE
FORE COURSE	49'	45'	32'	2'
FORE TOPSAIL	35'	49'	31'	2'
FORE TOPGALLANT	21'	33'	23'	2' 6"
MAIN COURSE	54'	56'	35'	2'
MAIN TOPSAIL	40'	53'	35'	2'
MAIN TOPGALLANT	24'	38'	25'	2'
MIZZEN TOPSAIL	25'	31'	35'	2'

* ALTERED OR CORRECTED

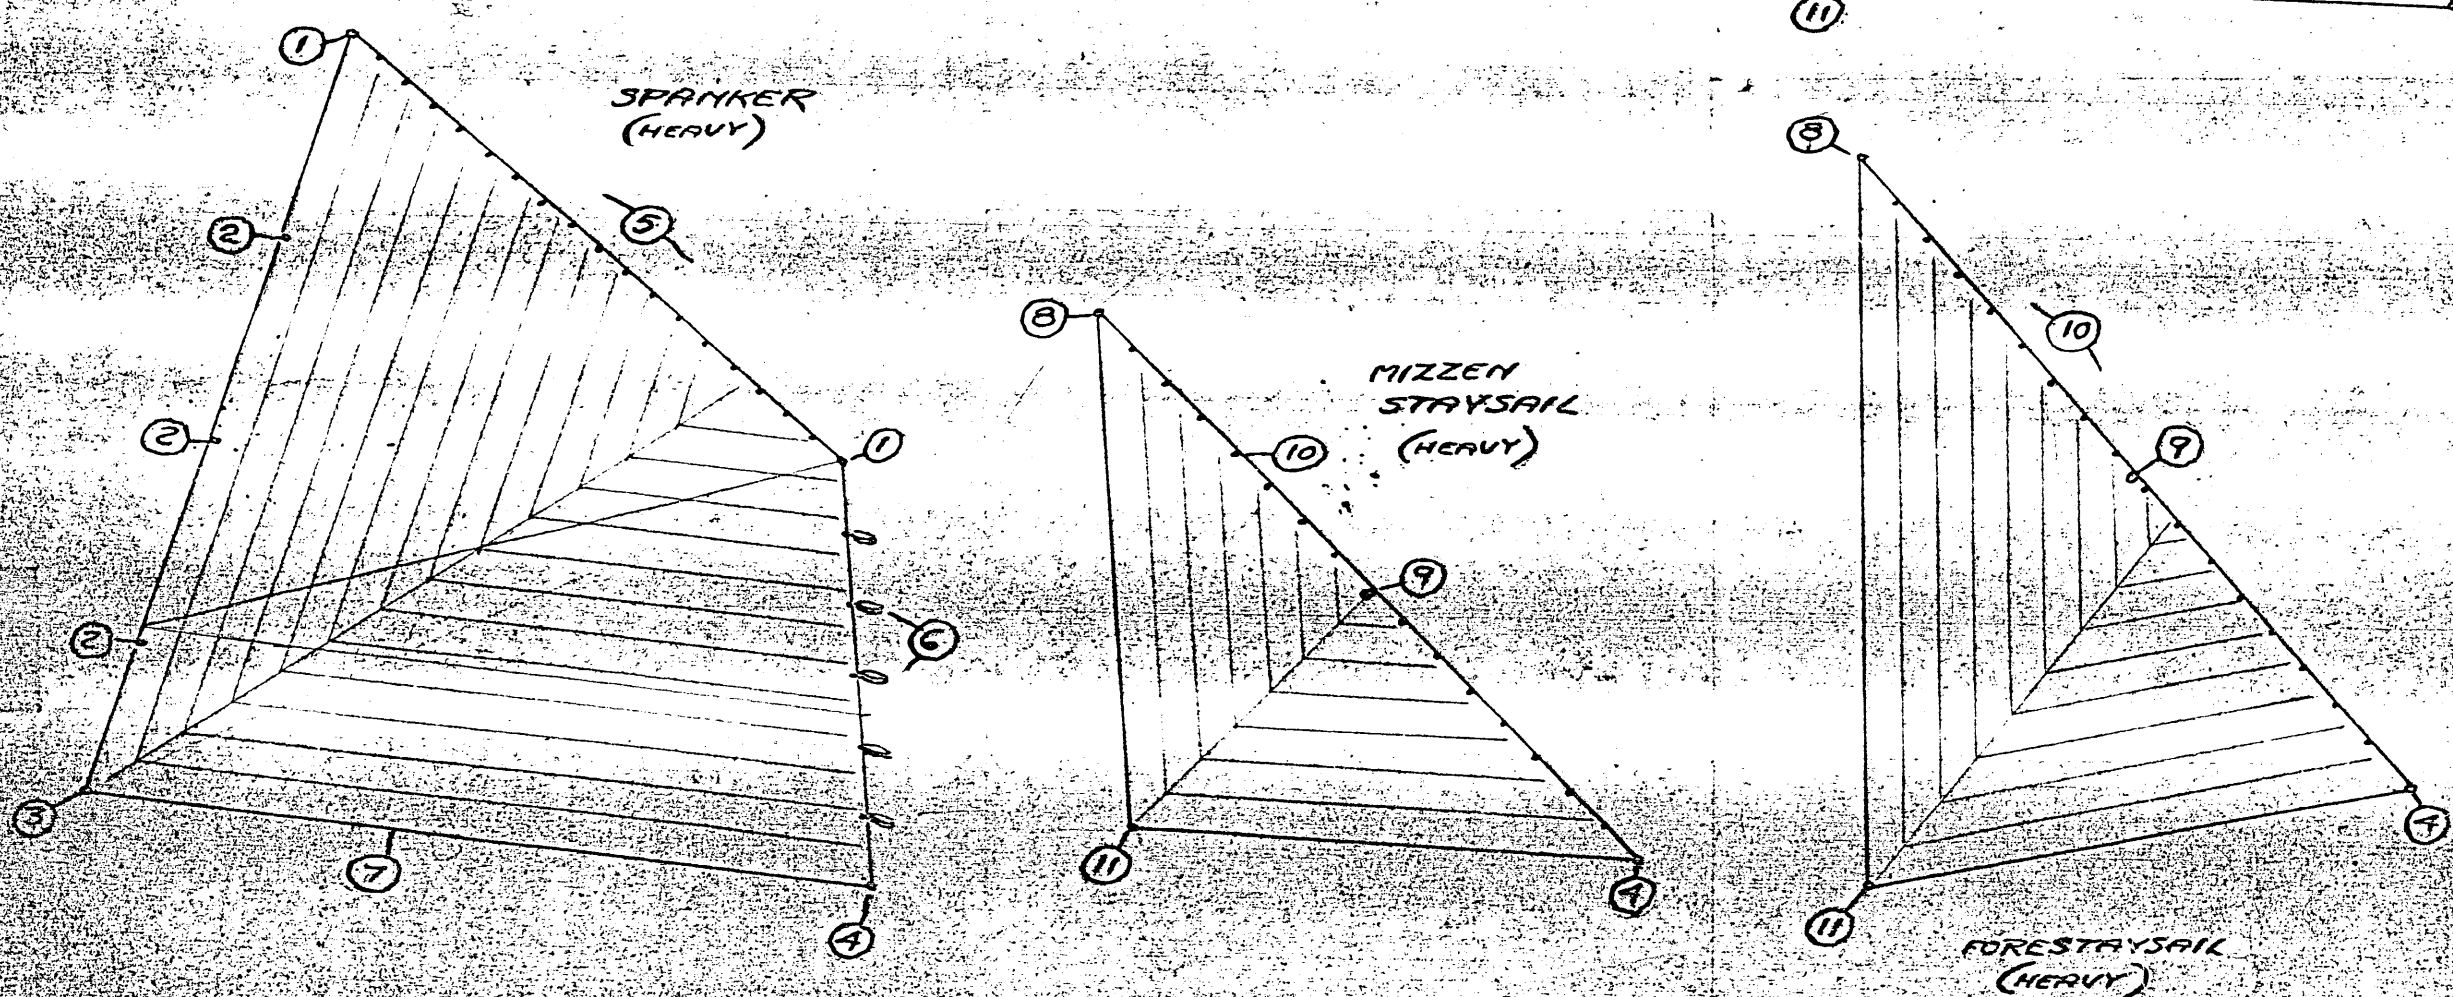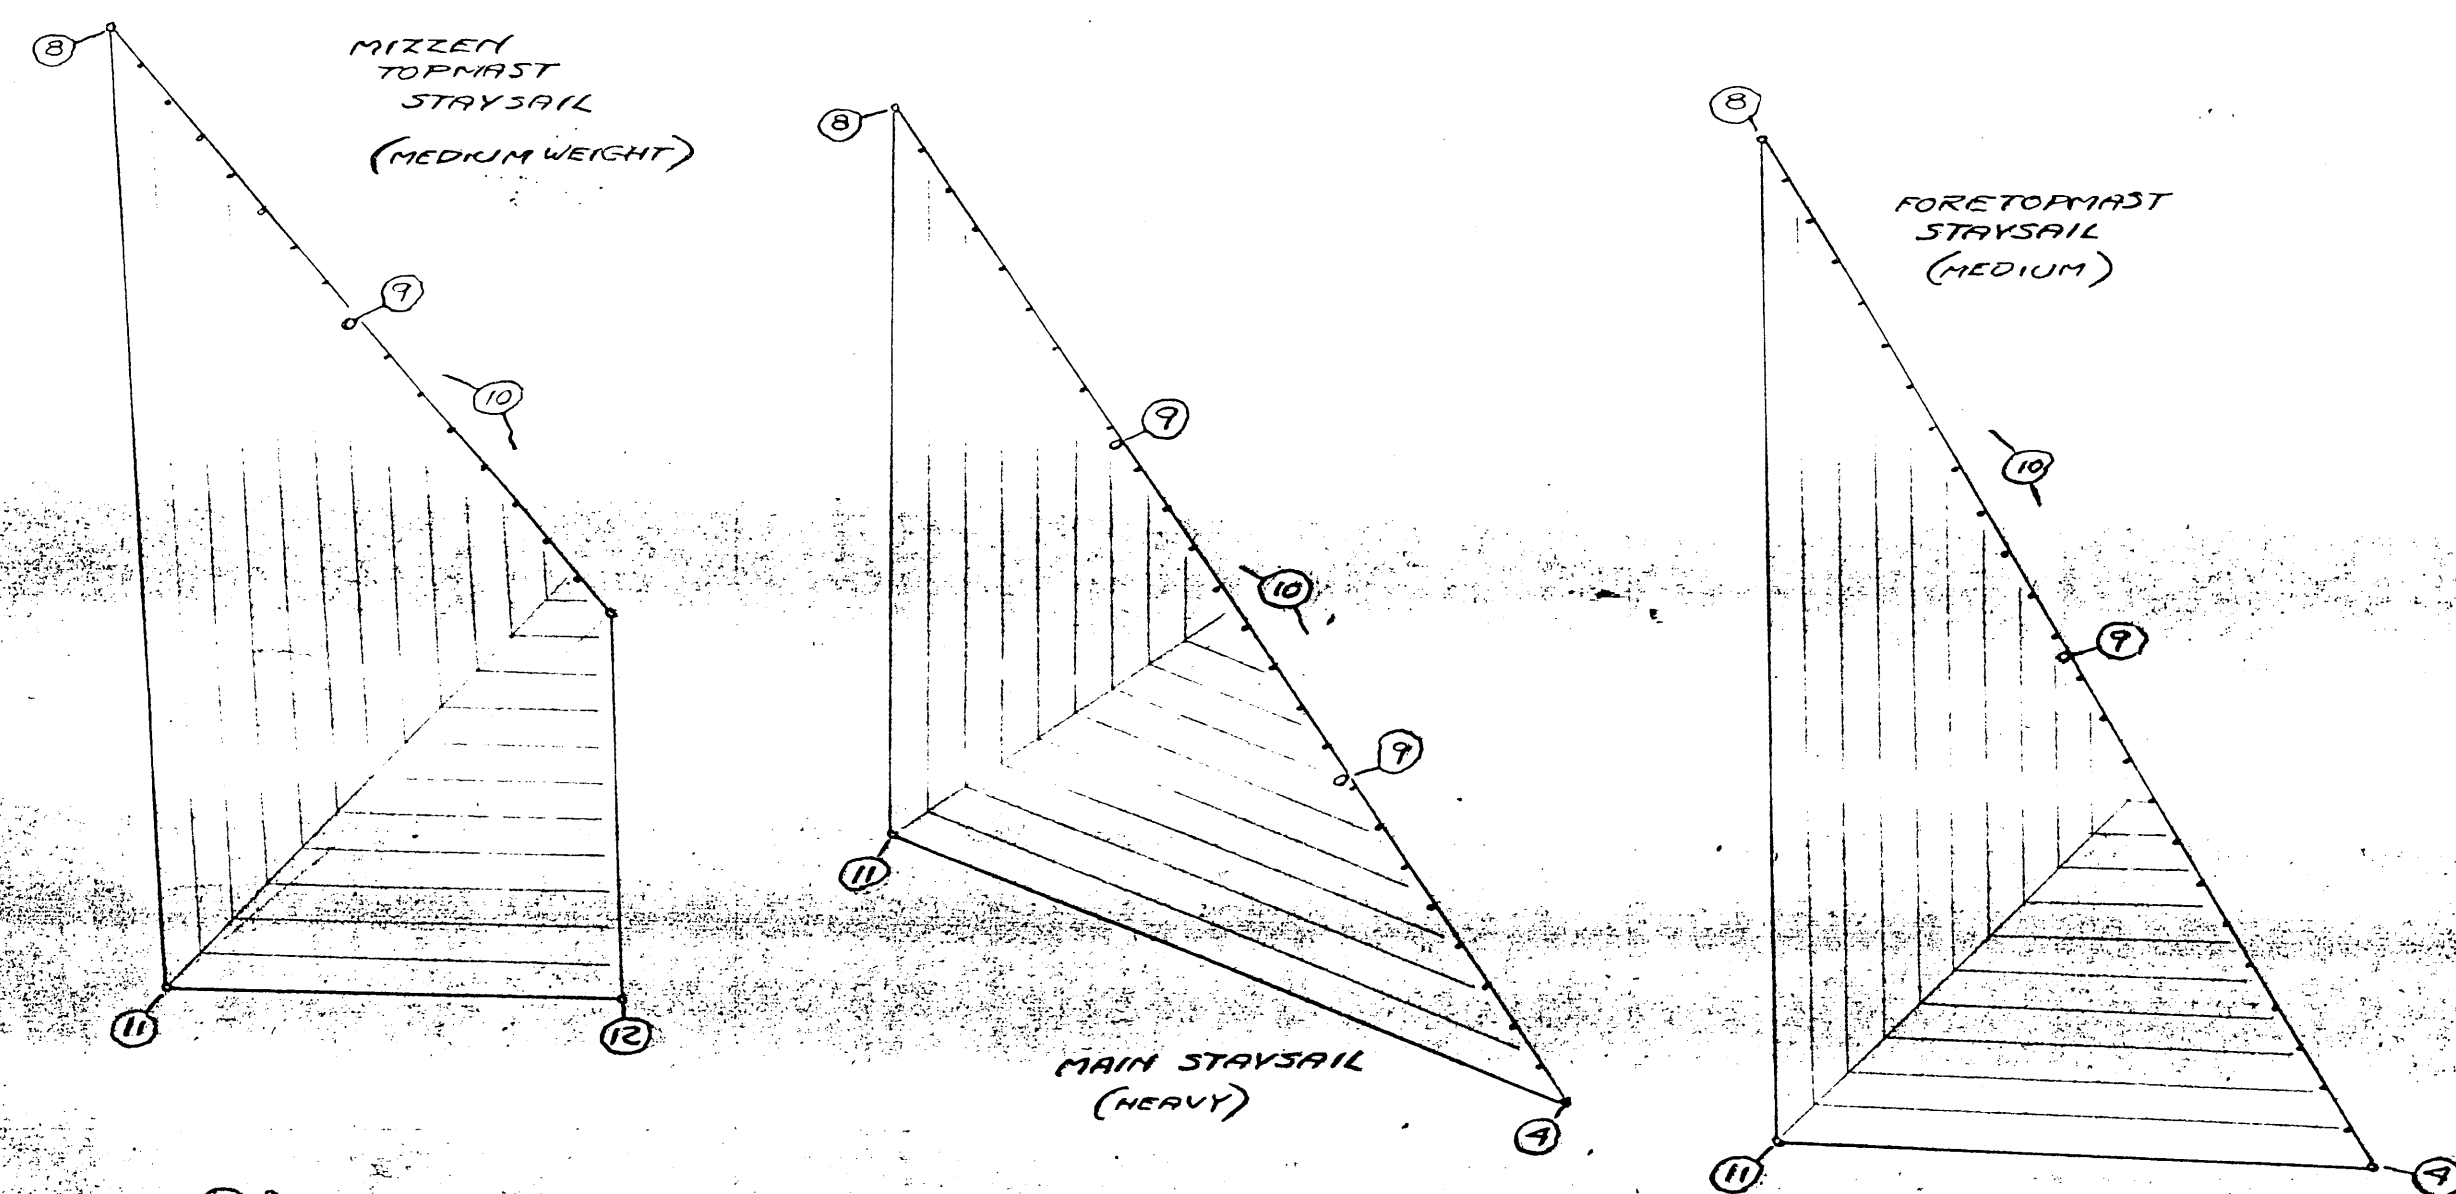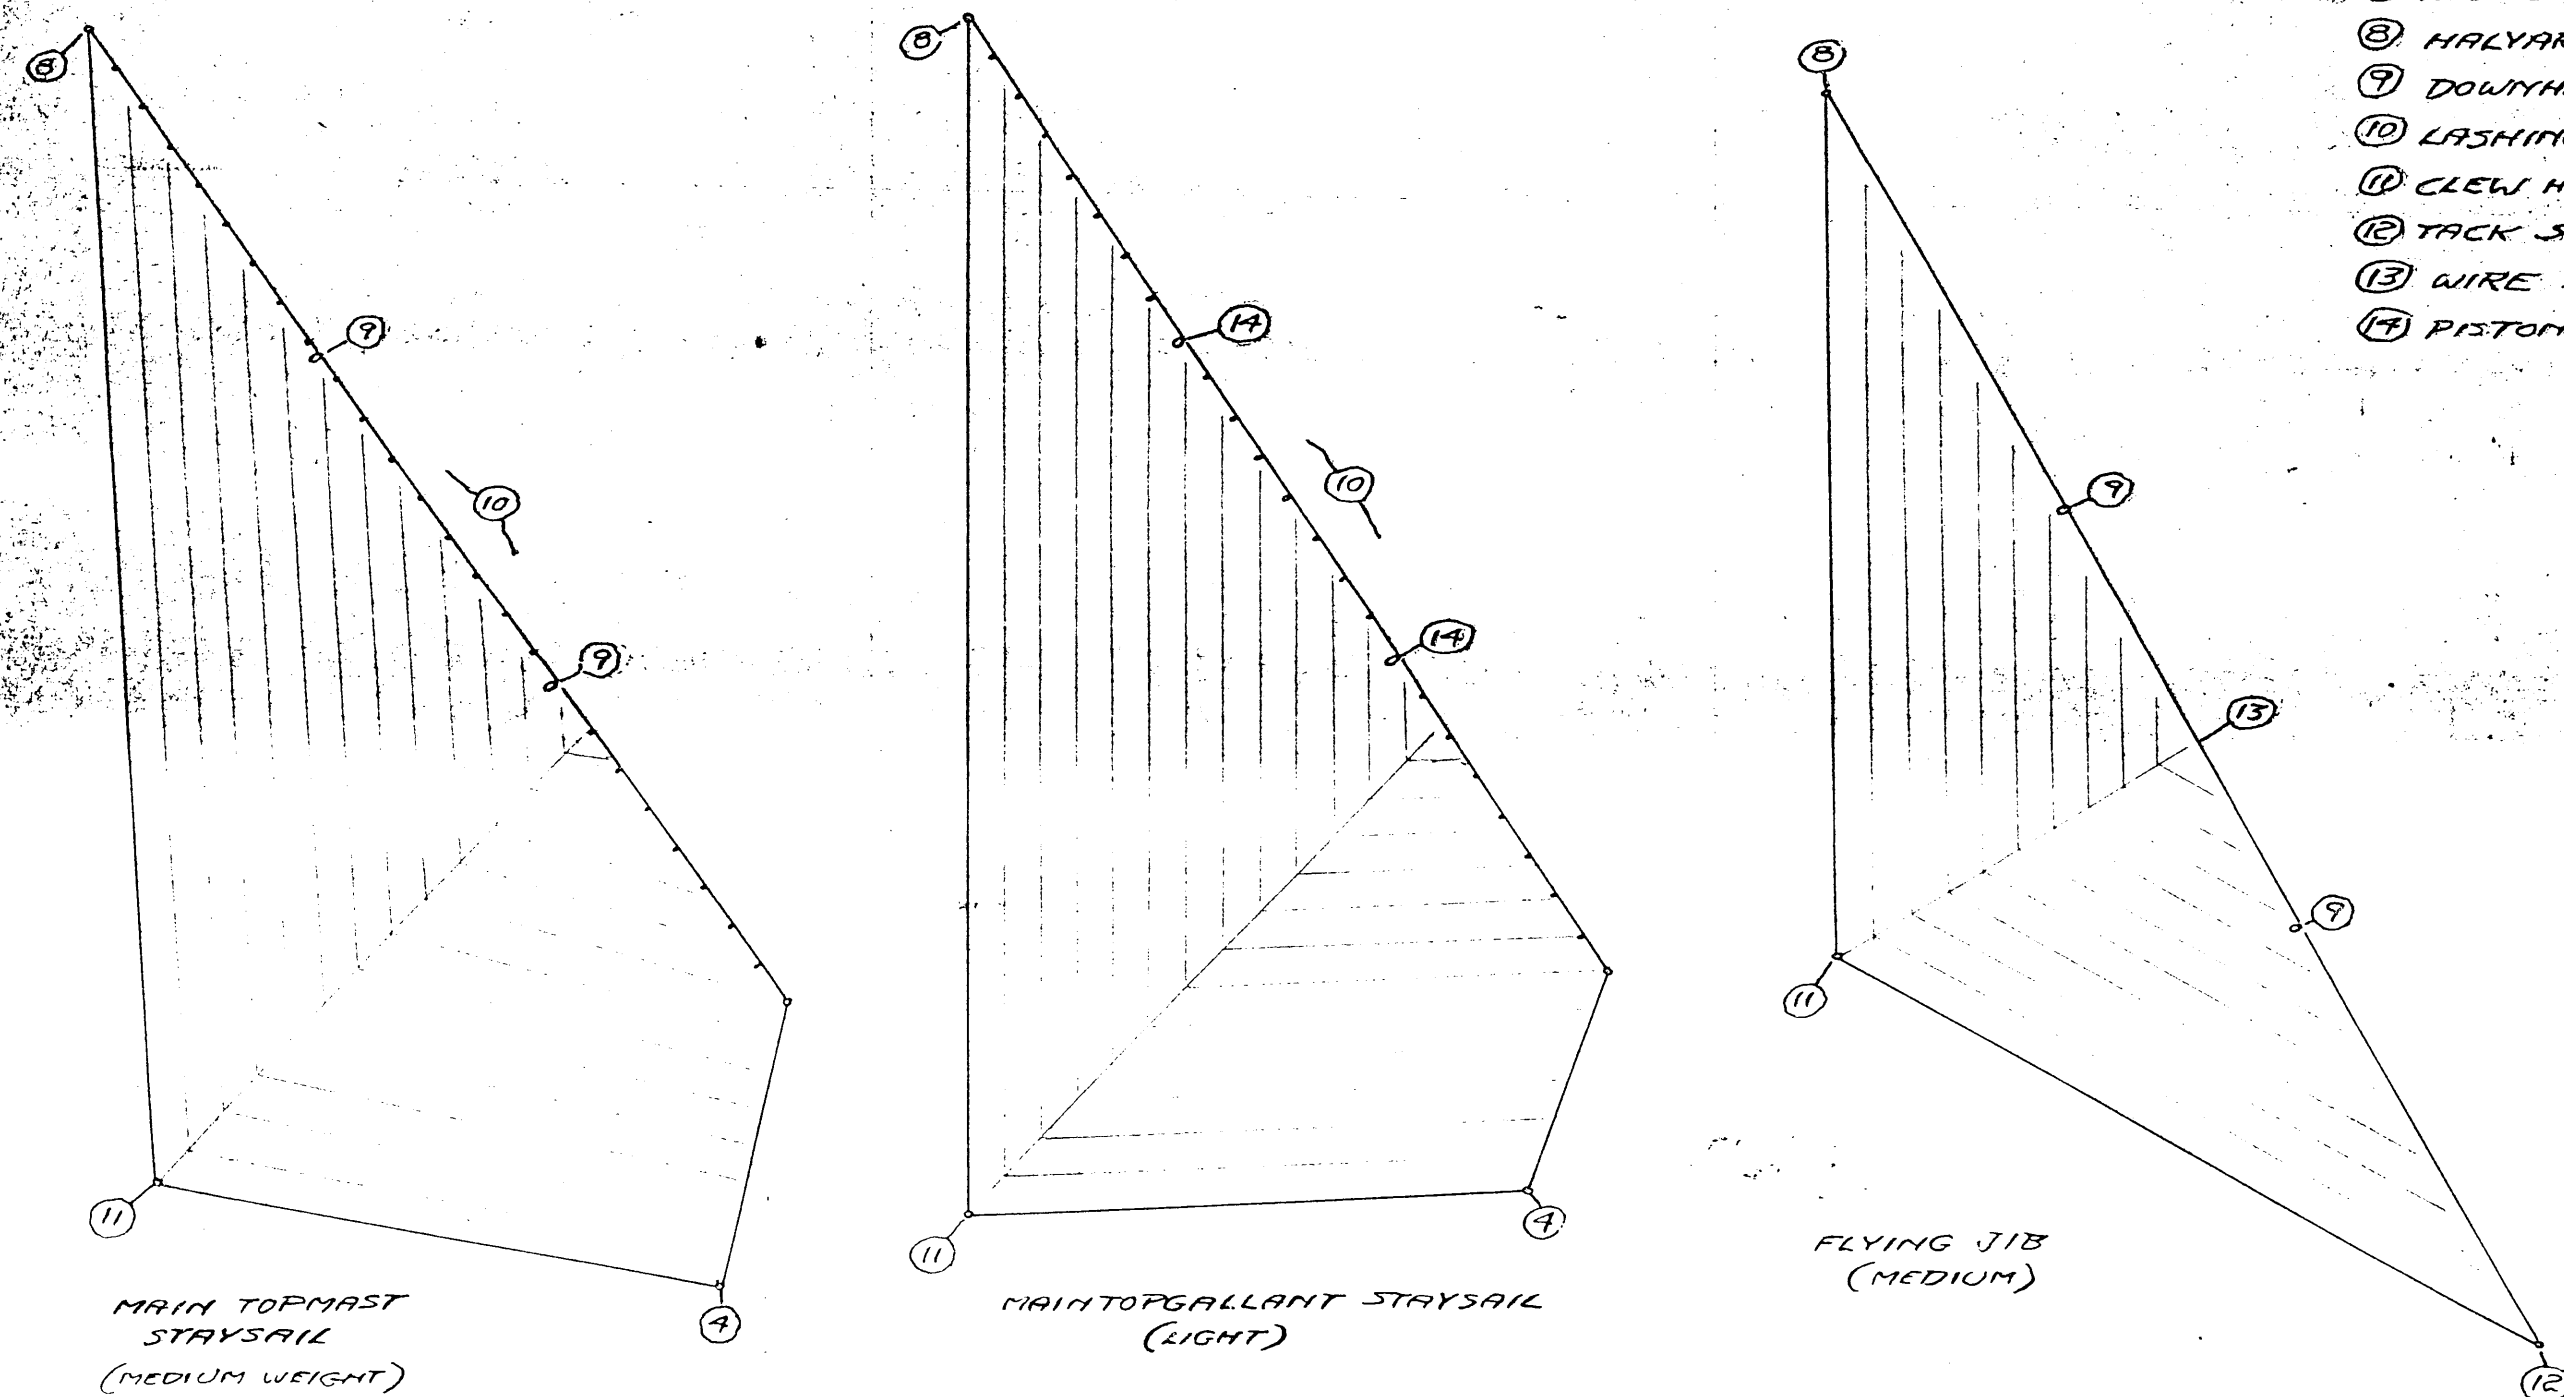

RE: ELIMINATE MITRE IN ALL CUT WITH LARCH

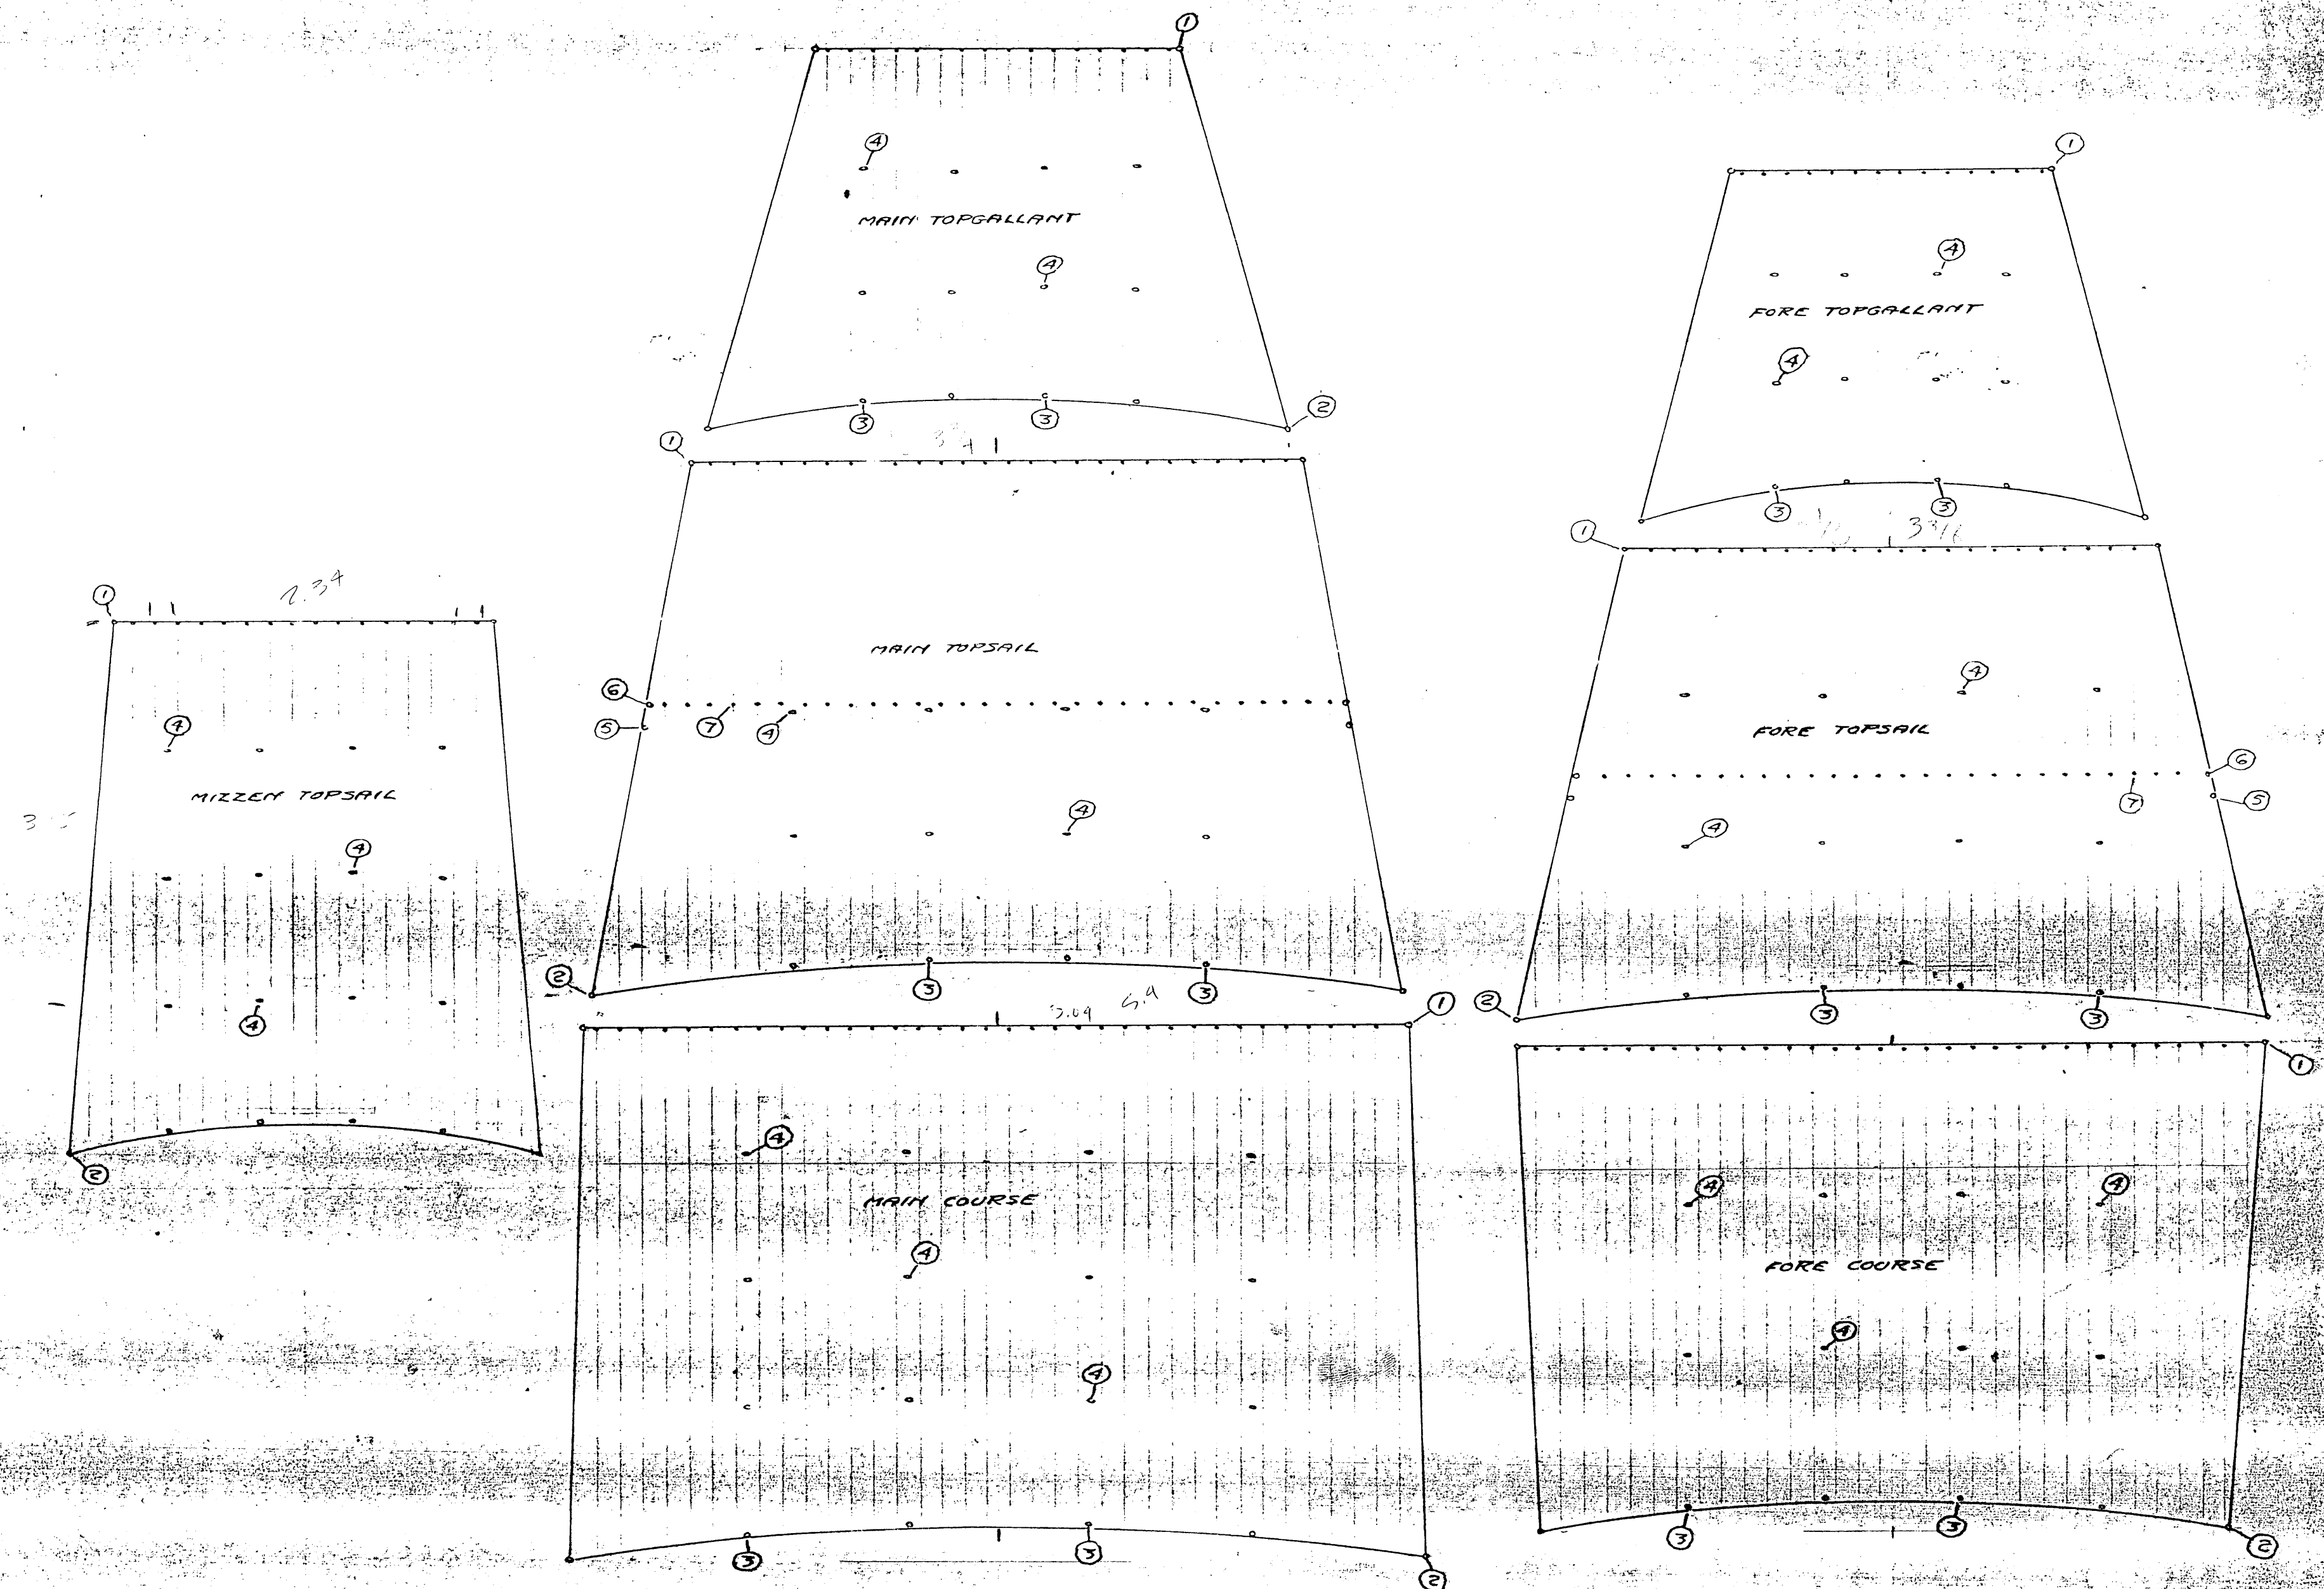

- ① EARLINE CRINGLES
- ② CLEW IRONS
- ③ BUNTLINE HOLES
- ④ BUNTLINE THIMBLES
- ⑤ REEF TACKLE CRINGLES
- ⑥ REEF CRINGLES
- ⑦ REEF POINTS

SCALE 1/8" = 1'0"

COPYRIGHT
"HMS" Rose Foundation, Inc.
One Bostwick Avenue
Bridgeport, CT 06605
P: (203) 335-1433
F: (203) 335-6793

SALES
REVISED 9/10/67