


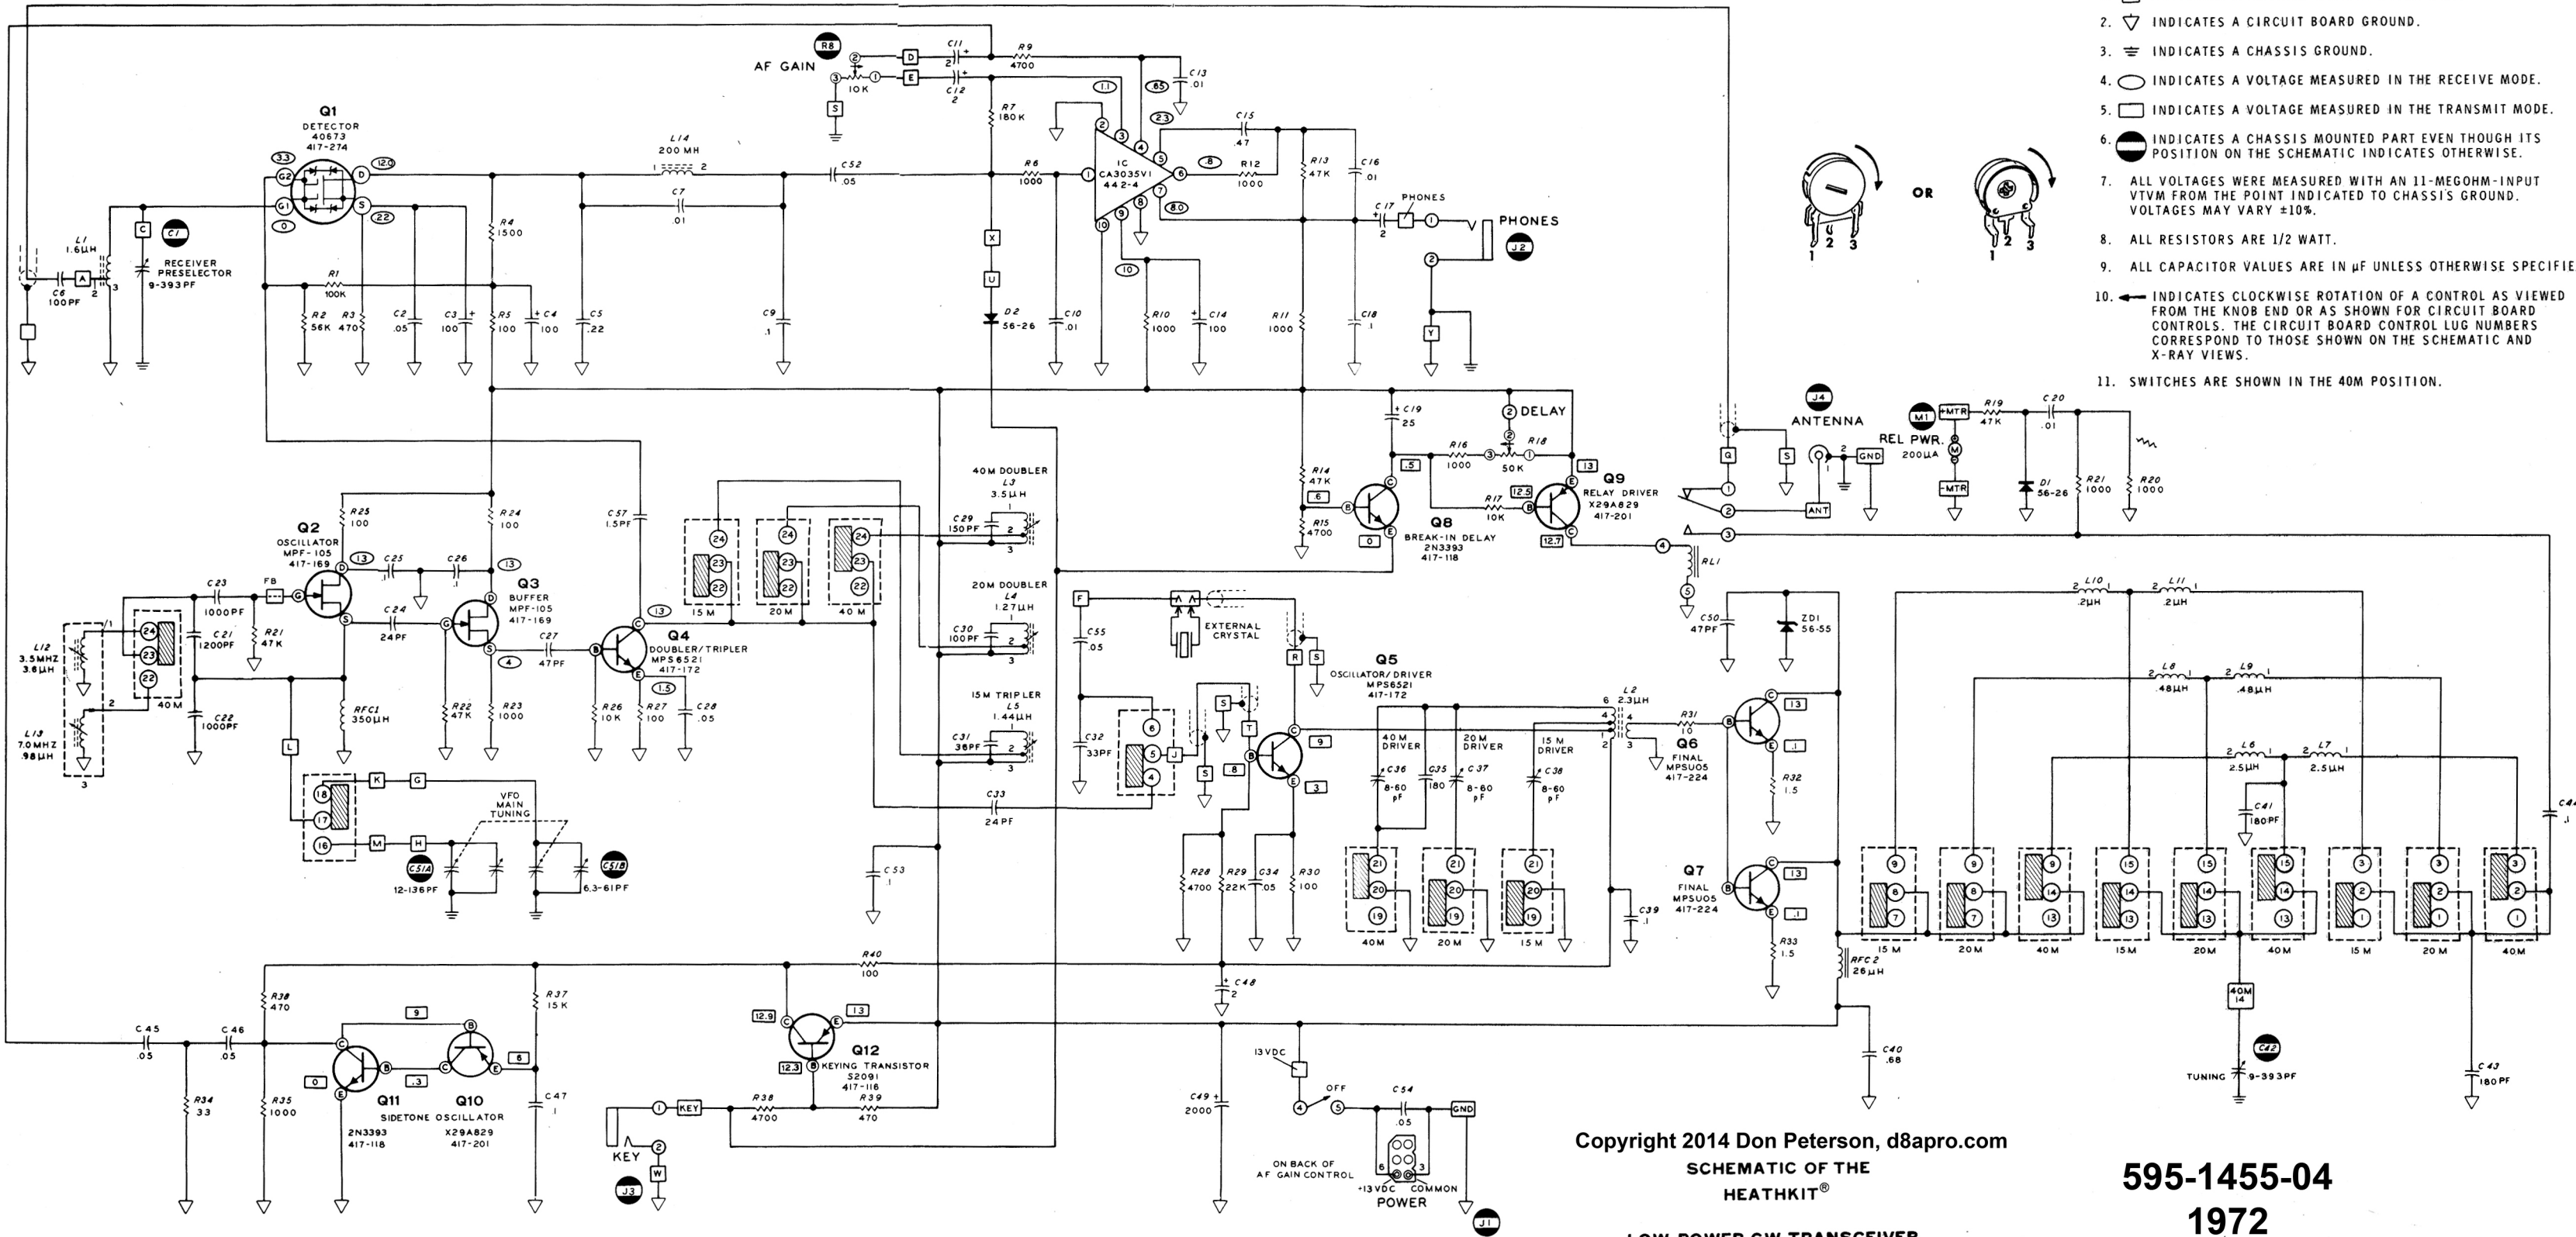

- NOTES:
1. INDICATES A LETTERED CIRCUIT BOARD HOLE.
 2. INDICATES A CIRCUIT BOARD GROUND.
 3. INDICATES A CHASSIS GROUND.
 4. INDICATES A VOLTAGE MEASURED IN THE RECEIVE MODE.
 5. INDICATES A VOLTAGE MEASURED IN THE TRANSMIT MODE.
 6. INDICATES A CHASSIS MOUNTED PART EVEN THOUGH ITS POSITION ON THE SCHEMATIC INDICATES OTHERWISE.
 7. ALL VOLTAGES WERE MEASURED WITH AN 11-MEGOHM-INPUT VTVM FROM THE POINT INDICATED TO CHASSIS GROUND. VOLTAGES MAY VARY ±10%.
 8. ALL RESISTORS ARE 1/2 WATT.
 9. ALL CAPACITOR VALUES ARE IN µF UNLESS OTHERWISE SPECIFIED.
 10. INDICATES CLOCKWISE ROTATION OF A CONTROL AS VIEWED FROM THE KNOB END OR AS SHOWN FOR CIRCUIT BOARD CONTROLS. THE CIRCUIT BOARD CONTROL LUG NUMBERS CORRESPOND TO THOSE SHOWN ON THE SCHEMATIC AND X-RAY VIEWS.
 11. SWITCHES ARE SHOWN IN THE 40M POSITION.

Copyright 2014 Don Peterson, d8apro.com
SCHEMATIC OF THE
HEATHKIT®
LOW-POWER CW TRANSCEIVER
MODEL HW-7

595-1455-04
1972