


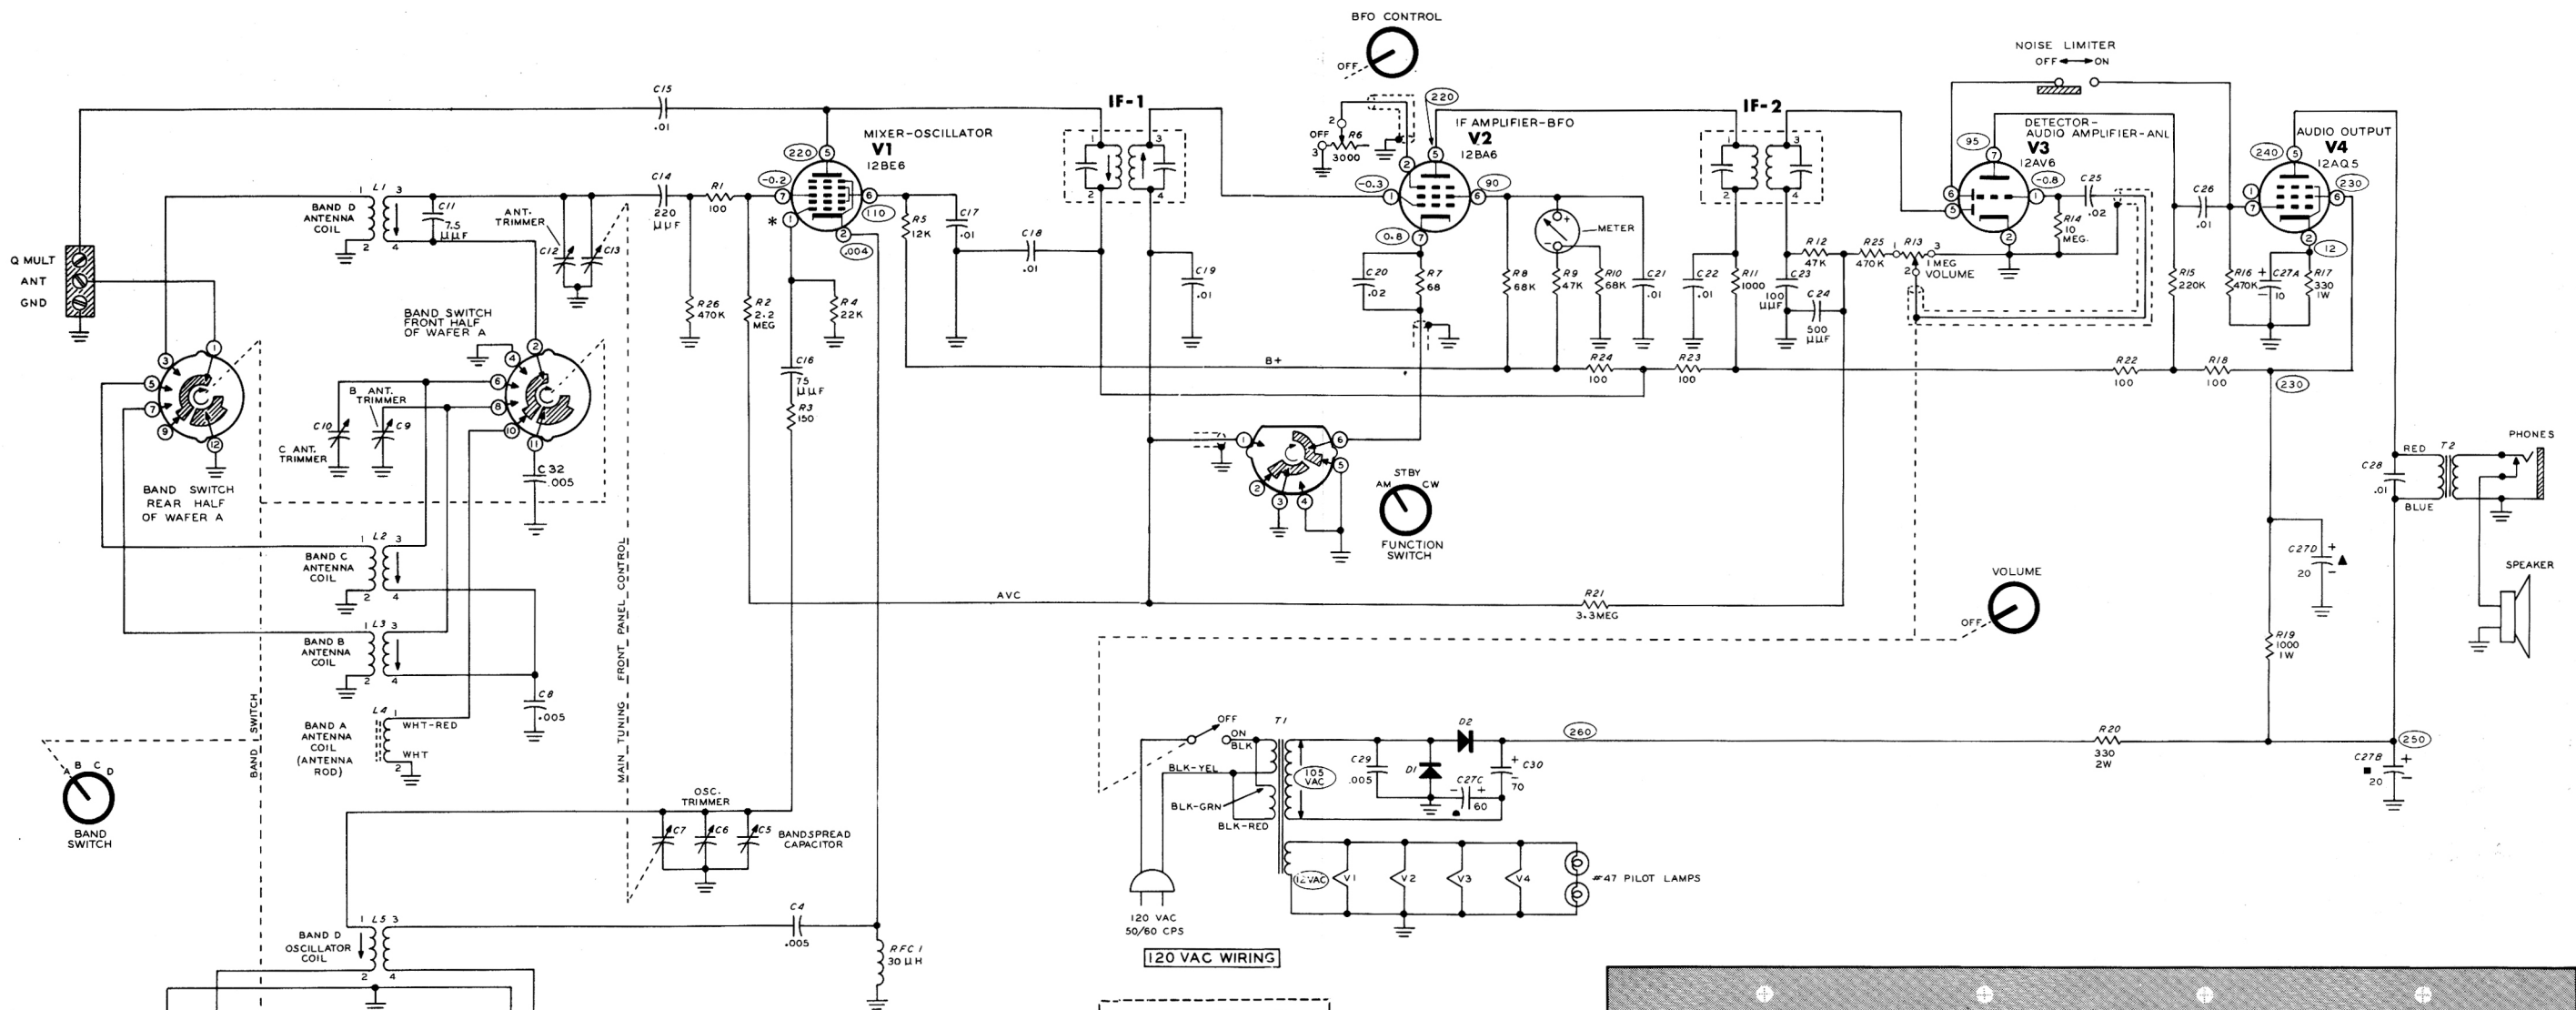

SCHEMATIC OF THE
HEATHKIT®
SHORTWAVE RECEIVER
MODEL GR-64

Copyright 2014 Don Peterson, d8apro.com

NOTES:

ALL RESISTORS ARE 1/2 WATT UNLESS MARKED OTHERWISE.
ALL RESISTOR VALUES ARE IN OHMS (K = 1,000, MEG = 1,000,000).
ALL CAPACITOR VALUES ARE IN μ F UNLESS OTHERWISE MARKED.
INDICATES VOLTAGE READING.
ALL VOLTAGES ARE DC POSITIVE UNLESS MARKED OTHERWISE.
EXCEPT AC VOLTAGES ON POWER TRANSFORMER WINDINGS.
VOLTAGE READINGS TAKEN WITH AN 11 MEGOHM INPUT VTVM.
VOLTAGES MAY VARY $\pm 10\%$.
VOLTAGES MEASURED WITH THE CONTROLS SET AS FOLLOWS:
BAND SPREAD - 10 (SET)
VOLUME - 1/4 CLOCKWISE
FUNCTION SWITCH-AM
BAND - BAND A EXCEPT WHERE SHOWN
BFO - OFF
MAIN TUNING - 550
ANL - OFF
REFER TO THE X-RAY VIEW FOR THE PHYSICAL LOCATION OF PARTS ON THE CIRCUIT BOARD.
ALL SWITCHES VIEWED FROM THE FRONT, AT FULL COUNTERCLOCKWISE ROTATION.
* BAND A - -10
* BAND B - -6.5
* BAND C - -5.8
* BAND D - -5.2

595-942-01 11-22-68

