




# 73 Tests

## Knight R-55 Receiver

Don Smith W3UZN


THE new amateur is faced with quite a problem when buying a receiver. Of course it is nice to be able to walk into the store and buy one of the \$600 ham-band-only receivers, but most of us have to start a lot more modestly. Look then, if you will, at the Knight R-55 receiver. This is a general coverage receiver, which means that even if you finally decide to go for one of the multi-hundred dollar communications receivers, you still will have plenty of use for this.

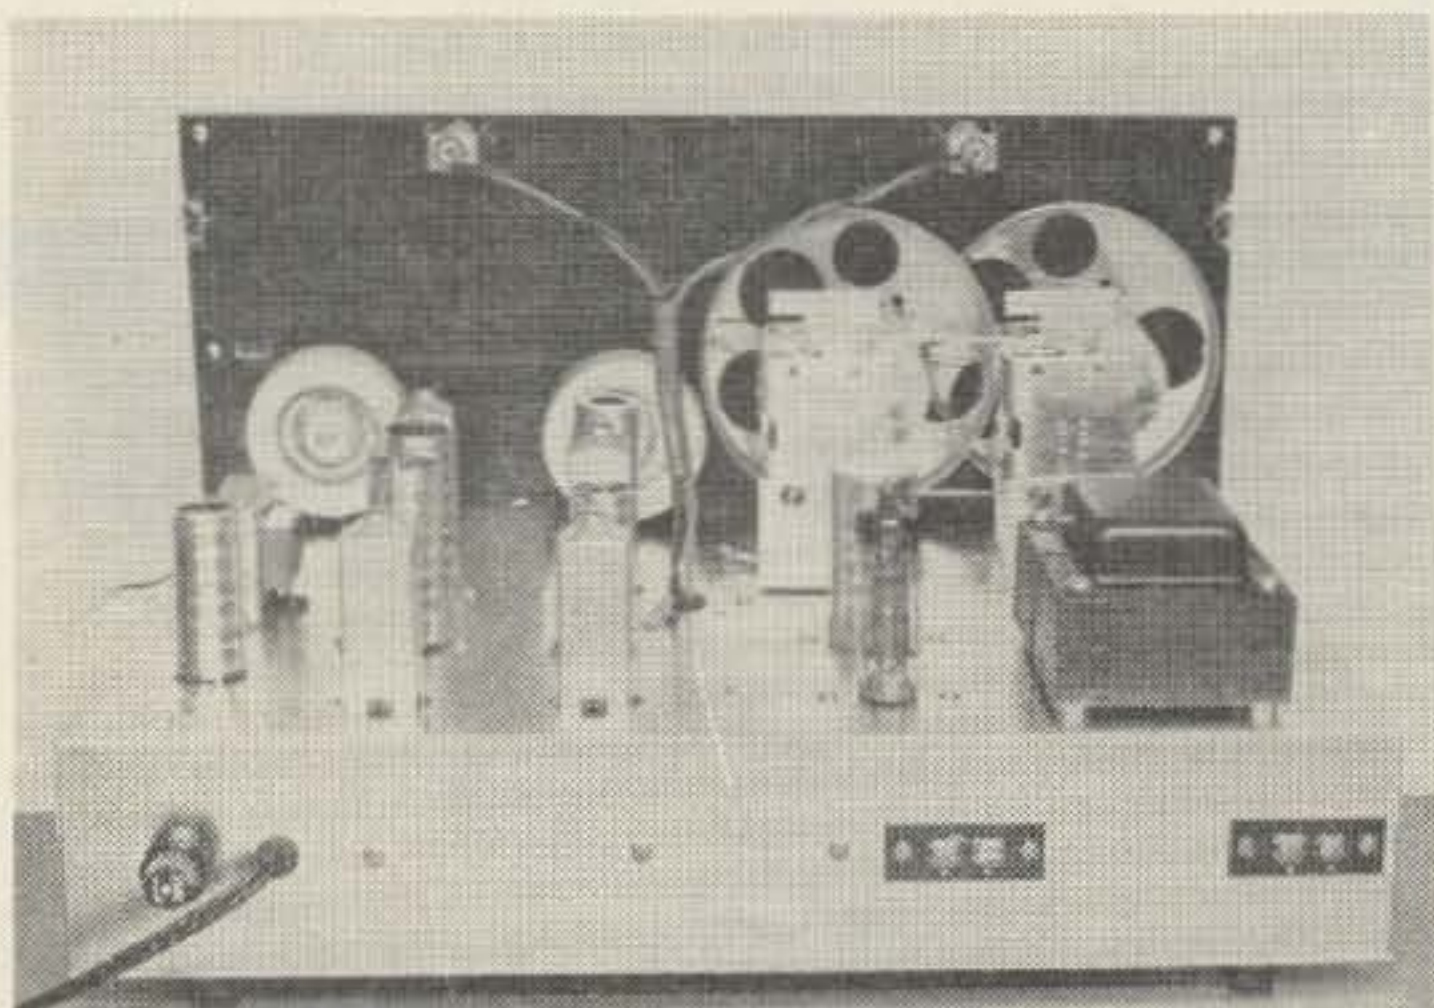

There are so many times when a general coverage receiver is needed that a ham shack certainly is incomplete without one. There are the obvious uses such as listening to the short wave broadcast stations, which can become a hobby all by itself. Or you can use it as a tunable if for a VHF converter . . . you can't do that with the bandspread receivers. WWV and CHU run interesting time programs, though I prefer the material broadcast by CHU, which

seems to have a better program director. If you decide to try RTTY you will want a receiver to copy press and weather stations. Let's not forget the broadcast band either. Plus a hundred other uses if you do any experimental work at all, or engage in three-way contacts or cross-band contacts. You can quickly check for harmonics, parasitics, and things like that. You may get the idea that a general coverage receiver is necessary . . . it is.

The Knight R-55 has several advantages. First of all is that \$67.50 price. It comes in kit form, but all the hard work is already done and the instruction manual is so simple that the rest is a breeze. It covers from 530 kc to 33 mc, which includes all of the short-wave broadcasting bands, and all of the ham bands from 160 through 10 meters. It also covers from 47-54 mc, which is the six meter amateur band. It is ac operated, using a power transformer, and has a separate BFO oscillator tube, fly-wheel tuning and an antenna trimmer for matching the receiver to your antenna.

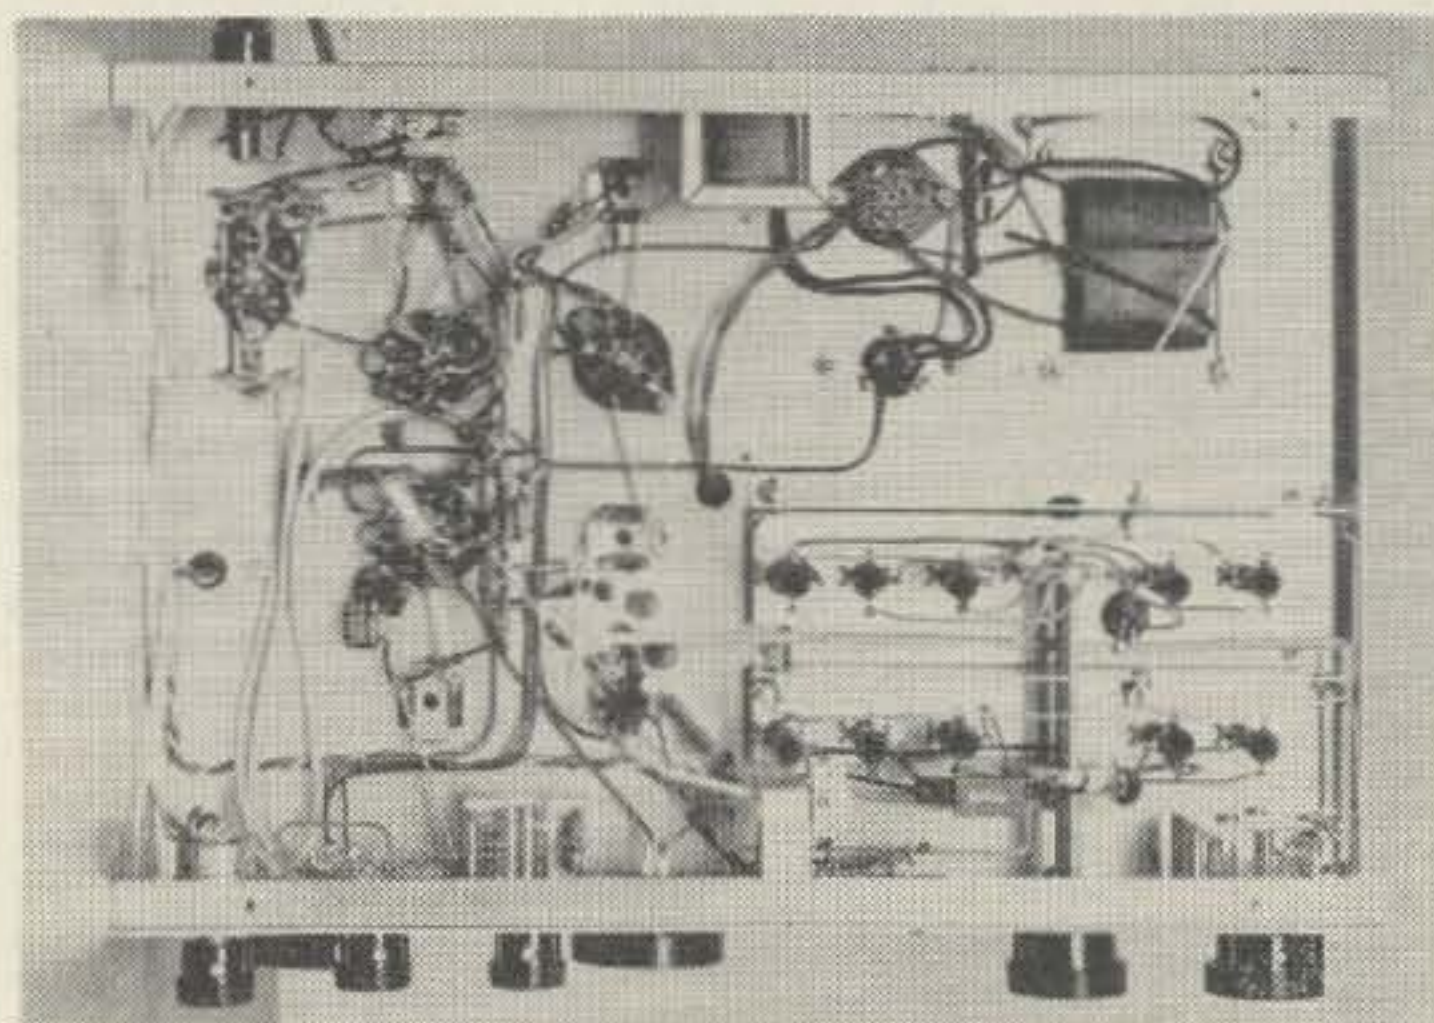

The kit is a pleasure to assemble. All wires are color coded and cut to the right length. All resistors are mounted on cards with their part number printed so you can't make a mistake, even if you are color blind. The manual is full of clear diagrams and pictures to eliminate any question about what goes where or when to put it in. Figure about ten hours for the whole job.

Now, about the results. I was surprised and pleased to use the R-55. The bandspread is ample on all amateur bands and both sensitivity and selectivity were fine. Even up on six meters there were stations coming in with

### R-55

Tuning ranges: 530 kc to 1.9 mc Band A  
1.8 mc to 6.3 mc Band B  
6.0 mc to 14.5 mc Band C  
11.5 mc to 33. mc Band D  
47 mc to 54. mc Band E

IF frequency: 1650 kc

Sensitivity: 80 meters = 4uv 40 meters = 6uv  
20 meters = 8uv  
15 meters = 7uv 10 meters = 6 uv  
6 meters = 10uv


Antenna impedance: 52 ohms  
Power consumption: 60 watts @ 117 vac  
Dimensions: 11" deep, 14 1/4" wide, 8 5/8" high  
Weight: 19 lbs.  
Price: \$67.50

good signals. I suspect that one of those Nu-  
vistor pre-amplifiers would help a lot there,  
though. On the other bands the R-55 was easy  
to tune and fun to use. For \$67.50 this is quite  
a deal. . . . W3UZN

## Using Old Transistors

Don't throw away your old transistors they  
may be useful in more ways than one. Usu-  
ally when they burn out it is between col-  
lector and emitter. Sometimes base to collec-  
tor is the bad section.

Here is the way I do it—start out with 5 v  
or 6 v ac to a pair of test leads and a pilot  
light such as a #49 something with low current  
drain so you will not ruin what is left of the  
transistor.

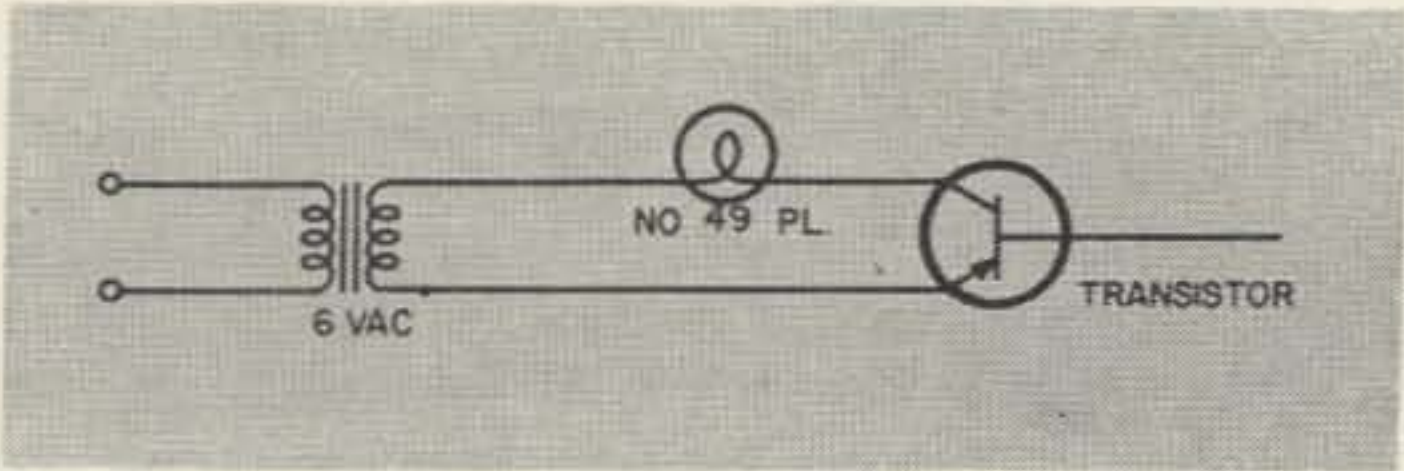

Check any two terminals of the transistor  
at a time collector to emitter, base to emitter  
etc. until you find two that pass current to  
the pilot light. Clip the unused wire and you  
have a diode for various purposes. If you  
don't have any results only thing to do is to  
throw the transistors away, it happens now  
and then. A word of caution—if for example  
the base emitter sections are okay and it is  
a P.N.P. transistor the base would be plus  
output and emitter negative etc. I have used  
them for relays noise limiters and the power  
type can be used for battery chargers—be  
sure to keep within voltage ratings.

. . . K8BYO

## TV INTERFERENCE?



A B&W low pass filter will end inter-  
ference with your neighbors TV recep-  
tion. B&W Model 424 is a three-  
section low pass filter which installs  
in the antenna coaxial line. Reduces  
all frequencies within the TV band  
by 60 db (a reduction of 1-million  
times).

The B&W Model 424 offers negligible  
filtering to frequencies below 30mc.  
Made for installation in 52 and 72  
ohm coax lines. Ideal for any trans-  
mitter (up to 100 watts) operating  
between 1.5 and 30 mc.

At your dealers for only **\$8.65**



**BARKER & WILLIAMSON, Inc.**  
BRISTOL, PENNSYLVANIA

### DUMMY LOAD

Here is a dummy load that has a flat SWR thru 6 meters  
will take 250 watts for brief periods complete with so  
239 conn. and instructions, Glo-bar type **\$4.75**  
postpaid. . . . .

**HAM KITS** BOX 175  
CRANFORD, NEW JERSEY

Give "him" the  
All-season

# Gift

**GREATEST VALUES EVER OFFERED**

INCOMPARABLE

*telrex*  
**BEAMS**



Arrays priced to every budget:

Arrays for 3/4-2-6-10-15-  
20-40 meters from \$5.95 to  
\$590.00—catalog on request.

ANTENNAS  
SINCE  
1921

Communication and TV Antennas  
**telrex** LABORATORIES

ASBURY PARK 40, NEW JERSEY, U.S.A.

The design, craftsmanship and  
technical excellence of Telrex —

"Beamed-Power"  
"Balanced-Pattern" Rotaries

have made them the standard of  
comparison throughout the world!  
Every Telrex antenna model is  
engineered, precision machined,  
tuned and matched, then calibrated  
for easy and correct assembly at  
your site for repetition of our  
specifications without 'cut and  
try' and endless experimentation.