


595-75

4-30-56

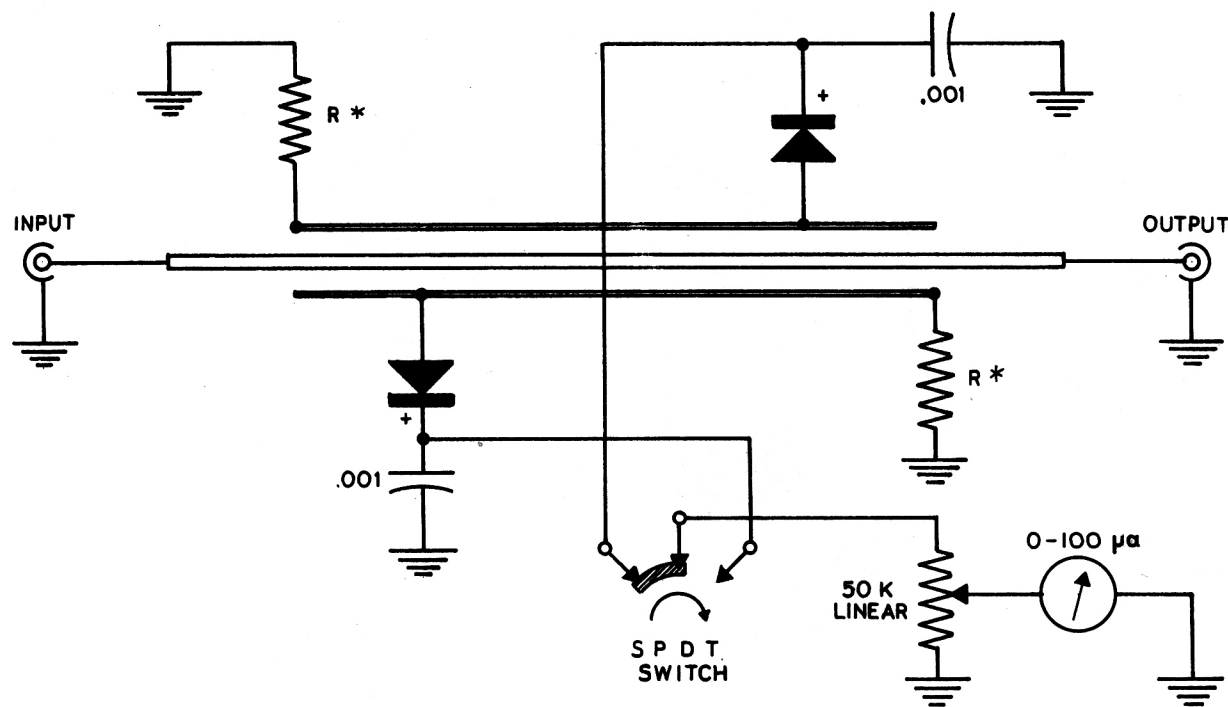

* NOTE

$R = 100\Omega$ or 150Ω

Two 100Ω resistors and two 150Ω resistors are included in the kit.

The 100Ω resistors are used for 75Ω input and output.

The 150Ω resistors are used for 50Ω input and output.

Copyright 2014 Don Peterson, d8apro.com

HEATHKIT REFLECTED POWER
AND STANDING WAVE RATIO BRIDGE
MODEL AM-2