

HAMMARLUND HX-50 TRANSMITTER/EXCITER - ADDENDA


TO INCREASE VOX SENS.

INSTALL A 47K 1/2 WATT RESISTOR BETWEEN C110 AND THE JUNCTION OF T102 AND R113. (SEE ATTACHED DRAWING).

TO REDUCE KEY CLICKS

CONNECT A 2 MFD 200 V. CAPACITOR BETWEEN THE JUNCTION OF R199 AND R200 AND GROUND. (SEE ATTACHED DRAWING).

NOTE: IF A ELECTROLYTIC CAPACITOR IS USED THE POSITIVE TERMINAL SHOULD BE CONNECTED TO THE CHASSIS (GROUND).

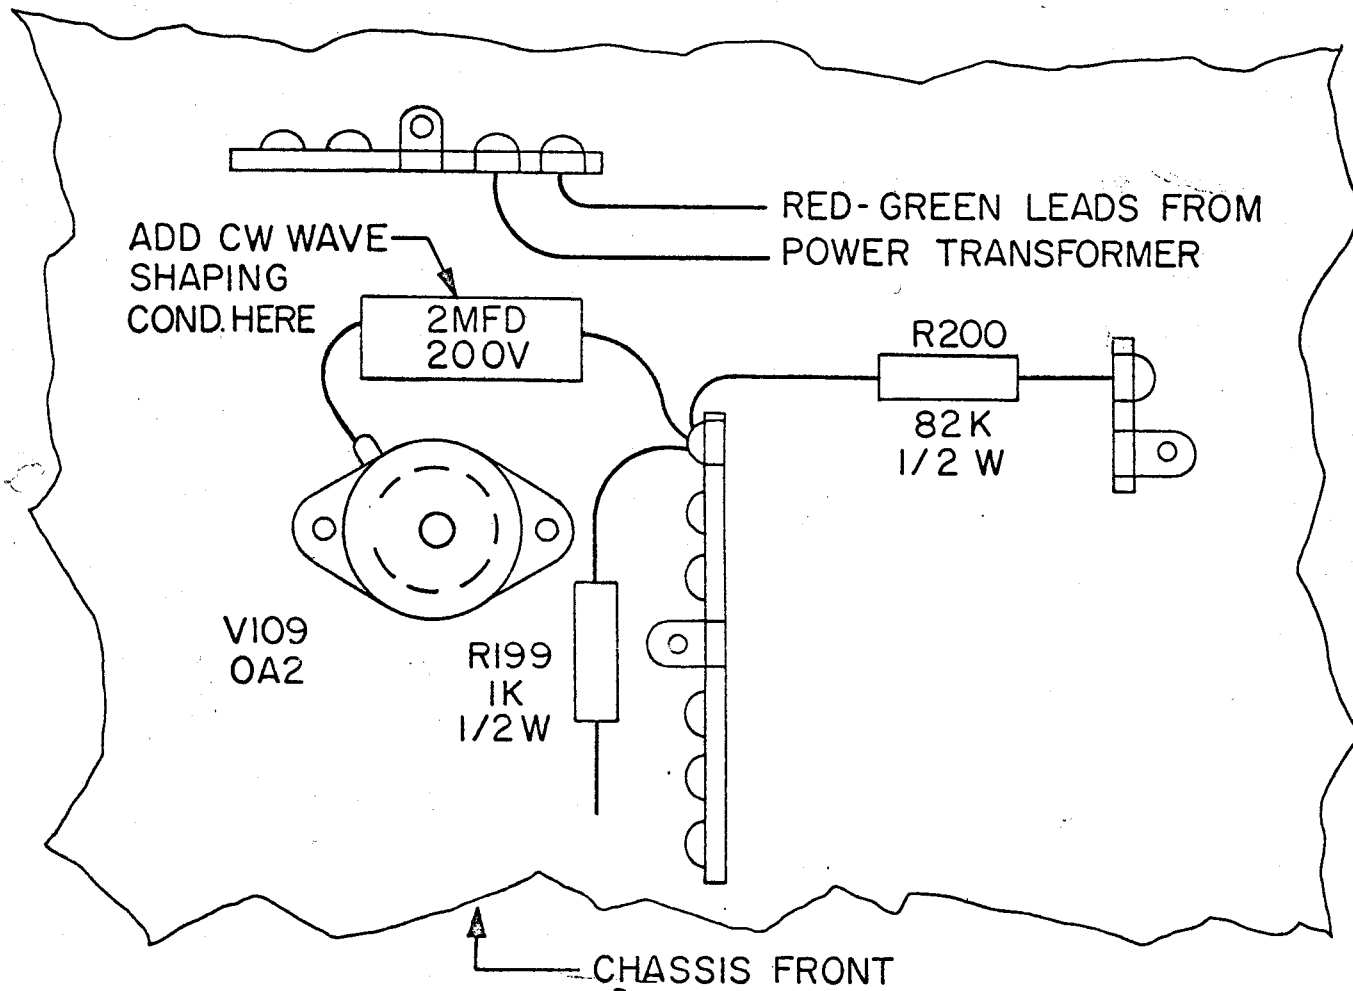

TO REDUCE KEY CLICKS

