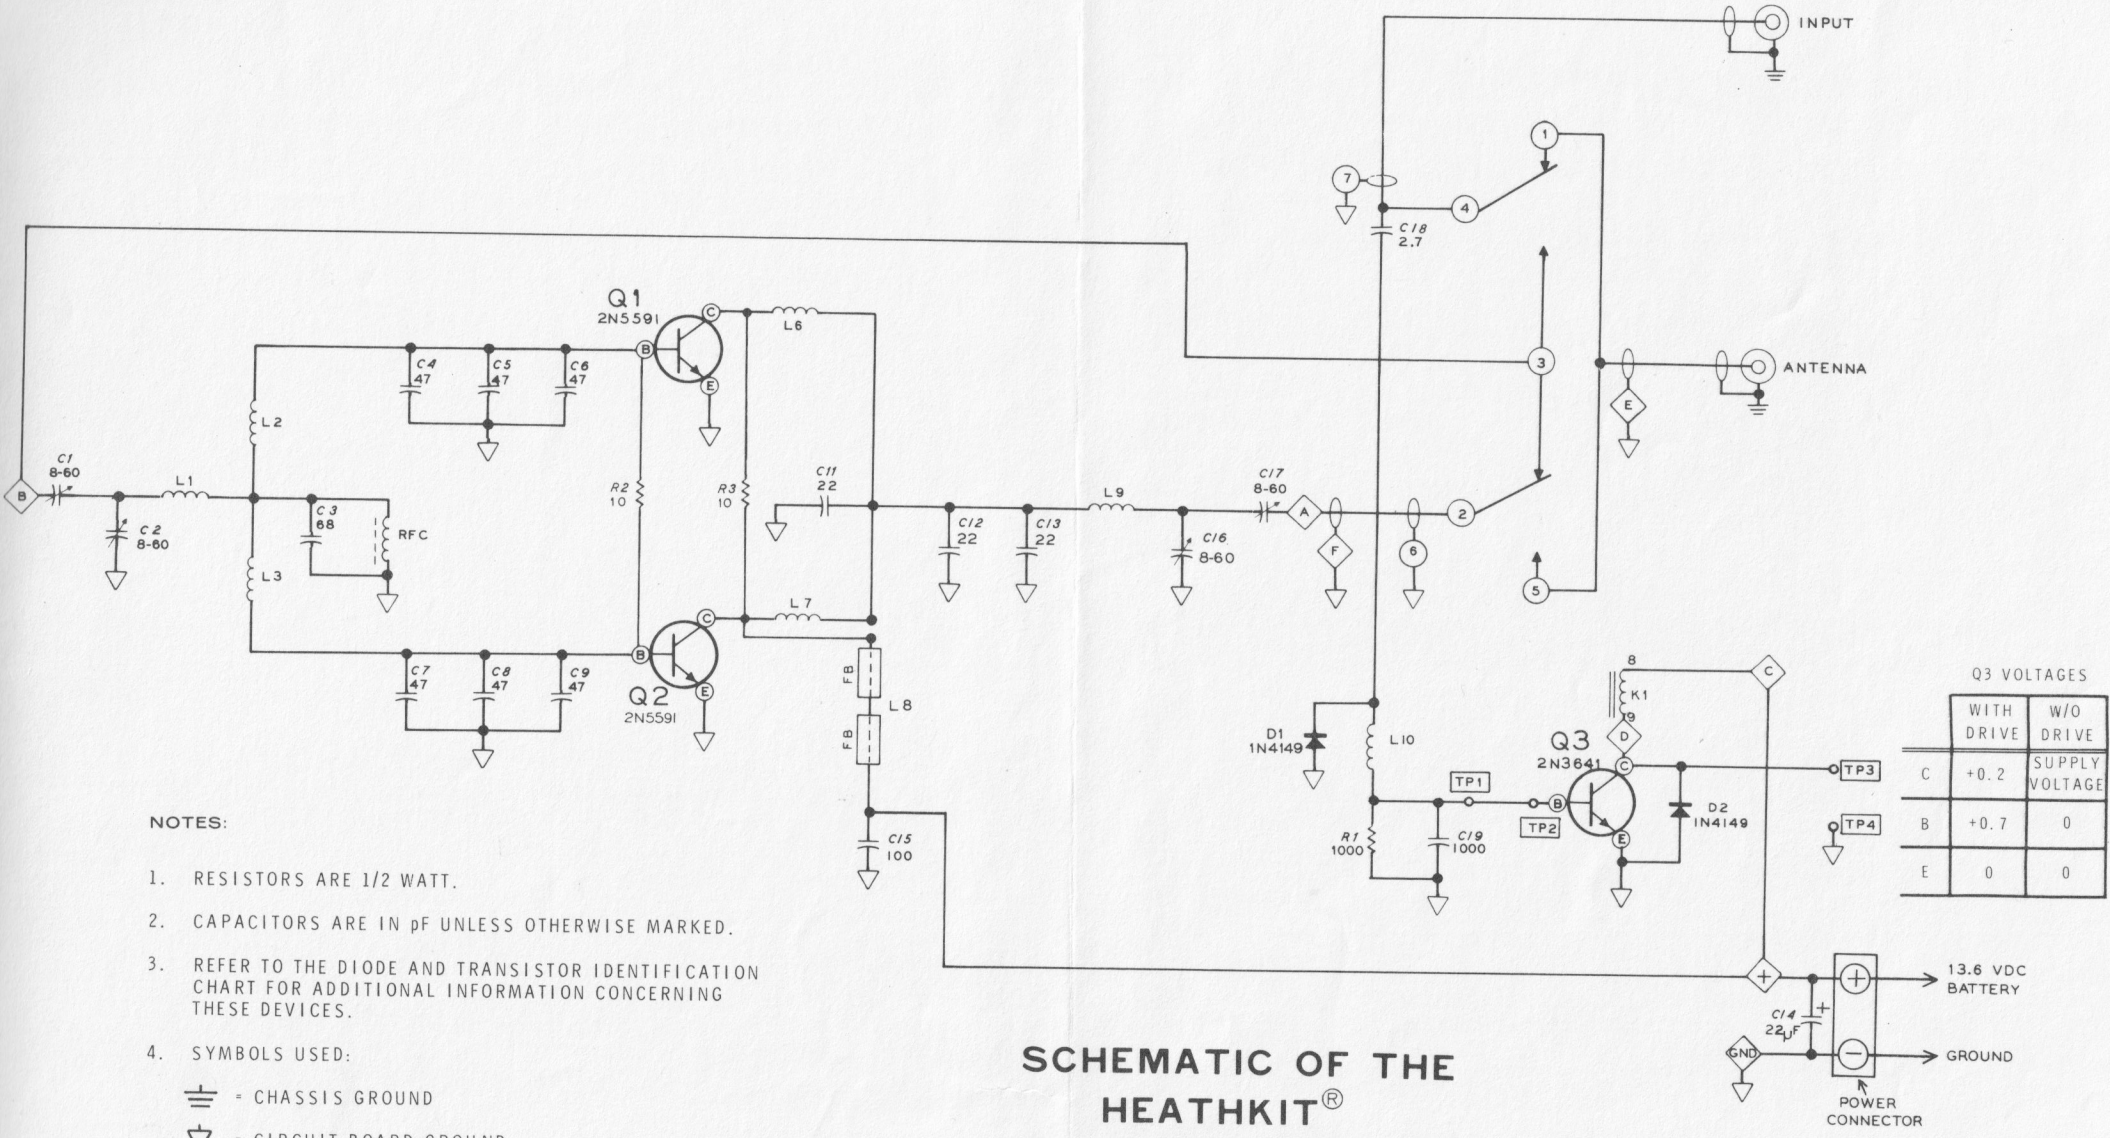

Q3 VOLTAGES

	WITH DRIVE	W/O DRIVE
C	+0.2	SUPPLY VOLTAGE
B	+0.7	0
E	0	0

NOTES:

1. RESISTORS ARE 1/2 WATT.
2. CAPACITORS ARE IN pF UNLESS OTHERWISE MARKED.
3. REFER TO THE DIODE AND TRANSISTOR IDENTIFICATION CHART FOR ADDITIONAL INFORMATION CONCERNING THESE DEVICES.
4. SYMBOLS USED:

= CHASSIS GROUND

= CIRCUIT BOARD GROUND

= RELAY TERMINAL

= CIRCUIT BOARD CONNECTION

= TERMINAL STRIP CONNECTION

FB = FERRITE BEAD

SCHEMATIC OF THE HEATHKIT®

2-METER FM AMPLIFIER MODEL HA-202